

C2

**NC Fully Automatic
Horizontal Bandsaw**



(CE Model)

Instruction Manual

FROM THE MANUFACTURER

Thank you for your purchase of COSEN's bandsaw machine and your trust in the COSEN brand.

We are excited to have you as our valued customer and look forward as much as you do to the accelerated productivity, long-lasting endurance and superb cost-effectiveness this machine is about to bring to you.

To ensure you are fully utilizing our machine and taking advantage of it in every possible way, please take your time to read through this instruction manual.

Any comments or suggestions in making our services better, please do not hesitate to let us know. Thank you again!

NOTE:



- Read this instruction manual carefully to familiarize yourself with the installation, operation and maintenance of your COSEN bandsaw machine.
- Operate the machine following the procedures described in the manual to prevent personal injuries or machine damage.
- Keep this manual handy and refer to it whenever you are uncertain of how to perform procedures.



- For technical support or parts purchase, please contact your nearest COSEN representative or our service center:

For Europe:
email: europa@cosensaws.com
phone: +31-77-7600280
fax: +31-77-7600288
web: www.cosensaws.eu

For US, Mexico, and Canada:
email: info@cosensaws.com
phone: +1-704-943-1030
toll free: +1-877-SAWING1
fax: +1-704-943-1031
web: www.cosensaws.com

For China:
email: service@cosensaws.cn
phone: +86-152-50127815
web: www.cosensaws.cn

For Taiwan and other countries:
email: info@cosen.com
phone: +886-3-5332143
fax: +886-3-5348324
web: www.cosen.com.tw

Instruction Manual: C2
NC Fully Automatic Horizontal Bandsaw (CE model)
Ver.15 2020/1/21

© 2014 by COSEN MECHATRONICS CO., LTD.

No part of this publication may be photocopied or otherwise reproduced without the prior written permission of COSEN.

Printed in Taiwan

Safety rules



- It's essential to power on your bandsaw machine for at least one hour every two years, if you seldomly use the machine. (This period of power-on must be without proceeding with other operation) Otherwise the machine program may disappear due to not strictly follow this safety rule.

****The restoration-service fee for improper use will be extra charge. Please note.****



- Make sure your work area is cleared of uninvited people and obstacles every time before you start operating the machine.



- Never step or stand on the roller table. Your foot may slip or trip on the rollers and you will fall.



- Never wear gloves or loose clothing when operating the machine. It may lead to serious injury if they are caught in the running machine. Wrap or cover long hair.

- Never touch the running saw blade with gloves or not. It is dangerous if your hands, clothing or gloves are caught by the running blade.



- Make sure any use of fire is prohibited in the shop and install a fire extinguisher or other fire control device near the machine when cutting titanium, magnesium, or any other material that produces flammable chips. Never leave the machine unattended when cutting flammable materials.



- Use a water-soluble cutting fluid on this machine. Oil-based cutting fluids may emit smoke or catch fire, depending on how they are used.

Safety rules



- Never cut carbon or any other material that may produce and disperse explosive dust. It is possible that sparks from motors and other machine parts will ignite and explode the air-borne dust.



- Never adjust the wire brush or remove chips while the saw blade is still running. It is extremely dangerous if hands or clothing are caught by the running blade.

- Stop the saw blade before you clean the machine. It is dangerous if hands or clothing are caught by the running blade.

- Never start the saw blade unless the workpiece has been clamped firmly. If the workpiece is not securely clamped, it will be forced out of the vise during cutting.



- Take preventive measures when cutting thin or short pieces from the work to keep them from falling. It is dangerous if the cut pieces fall.

- Use roller tables at the front and rear sides of the machine when cutting long work. It is dangerous if the work piece falls off the machine.



- Turn off the shop circuit breaker switch before performing maintenance on the machine. Post a sign indicating the machine is under maintenance.

Table of Contents

Section 1 – Safety Information	1-1
Safety Instructions	1-1
Safeguard Devices	1-3
Emergency Stop	1-4
<i>Illustration: Emergency Stop</i>	1-5
Safety Labels	1-6
<i>Illustration: Safety Labels</i>	1-7
Hearing Protection	1-8
CE Compliance	1-8
Risk Assessment	1-8
Section 2 – General Information	2-1
Specification	2-2
Machine Parts Identification	2-3
Floor Plan	2-4
Section 3 – Moving & Installation	3-1
Location & Environment	3-1
Unpacking & Inspecting	3-2
Lifting	3-3
<i>Illustration: Lifting Points</i>	3-5
Removing Shipping Bracket	3-6
Cleaning	3-6
Installing	3-6
Supplying Hydraulic Oil	3-6
Supplying Coolant	3-7
Connecting Electric Power	3-7
Leveling	3-8
Anchoring	3-9
Installing Roller Table (Optional)	3-9
Installing Fire Control Device.....	3-9
Relocating	3-9
Section 4 – Operating Instructions	4-1
Safety Precautions	4-2
Before Operating	4-3
Control Panel	4-4
Control Panel	4-4

Table of Contents

Control Buttons	4-5
Blade Descend Pressure & Speed	4-7
HMI Touch Screen & Functions	4-7
HMI Error Codes	4-21
Standard Accessories	4-22
Optional Accessories	4-25
Unrolling & Installing the Blade	4-29
Adjusting Wire Brush	4-31
Adjusting Coolant Flow	4-31
Placing Workpiece onto Workbed	4-32
Positioning Workpiece for Cutting	4-33
Without Using Automatic First Cut Function.....	4-33
Using Automatic First Cut Function.....	4-34
Adjusting Blade Speed	4-35
Breaking-In the Blade	4-35
Test -Running the Machine	4-35
Cutting Operation	4-36
Using Top Clamp for Bundle Cutting.....	4-37
Terminating a Cutting Operation	4-38
Section 5 – Bandsaw Cutting: A Practical Guide	5-1
Introduction	5-1
Saw Blade Selection	5-1
Vise Loading	5-3
Blade Break -In	5-4
Section 6 – Maintenance & Service	6-1
Introduction	6-1
Basic Maintenance	6-1
Maintenance Schedule	6-2
Before Beginning a Day’s Work	6-2
After Ending a Day’s Work	6-2
Every 2 weeks	6-2
First 600hrs for new machine,then every 1200h.....	6-4
Every Six Months	6-5
Storage Conditions	6-5
Terminating the Use of Machine	6-5
Oil Recommendation for Maintenance	6-6

Table of Contents

Section 7 – Troubleshooting	7-1
Introduction	7-1
Precautions	7-2
General Troubles & Solutions	7-2
Minor Troubles & Solutions	7-3
Motor Troubles & Solutions	7-3
Blade Troubles & Solutions	7-4
Sawing Problems & Solutions	7-5
Re-Adjusting the Roller Table	7-12
Section 8 – Spare Parts Recommendations	8-1
Spare Parts Recommendations	8-1
Part List	8-2
Appendix	
Declaration of Conformity	
Electrical System	
Hydraulic System	

SAFETY INFORMATION

SAFETY INSTRUCTIONS

SAFEGUARD DEVICES

EMERGENCY STOP

SAFETY LABELS

HEARING PROTECTION

CE COMPLIANCE

RISK ASSESSMENT

Safety is a combination of a well-designed machine, operator's knowledge about the machine and alertness at all times. COSEN's band machine has incorporated many safety measures during the design process and used protective devices to prevent personal injuries and potential risks. Warning labels also serve as a reminder to the operator.

Throughout this manual, you will also see various safety-related symbols indicating important information that you should take note of prior to use of the machine or part of its functions. These important safety instructions do not cover all possible situations that might occur. It is your responsibility to take caution and follow procedures stated in this manual when installing, maintaining and operating your machine. Cosen will not be liable for damages resulting from improper use.

SAFETY INSTRUCTIONS

What the icons and signs in this user manual mean:



This icon marks **WARNING**; hazards or unsafe practices that may result in **personal injury or damage to the machine**.



Supplementary information to the procedures described in this manual.



Call your local agent or our service center for help.



This manual has important safety information. Read through it carefully before operating this machine to prevent personal injury or machine damage. Learn the operation, limitation and the specific potential hazards peculiar to this band saw. All users must read it before performing any activity on the machine, such as replacing the saw band or doing regular maintenance.



Disconnect the power cord before making adjustment, maintenance or blade changes.



Do not operate this machine unless it is completely assembled.



Make sure the power switch is off before plugging in power cord.



Always remember to switch off the machine when the work is completed.



Use recommended accessories. Improper accessories may be hazardous.



Never hold the material by hand for cutting. Always use the vise and make sure the material is clamped securely before cutting.



When a workpiece is too long or heavy, make sure it is supported with a roller table (recommended).



Keep your work area well illuminated at minimum 500 lumen.



Remove adjusting keys, wrenches or any loose parts or items from the machine before turning on power.



Use a sharp saw blade and keep the machine in its best and safest performance by following a periodical maintenance schedule.



Wear proper apparel during operation and when servicing the machine. Some personal protective equipment is required for the safe use of the machine, e.g. protection goggles.



Moving parts should be kept in proper alignment and connection with the machine. Check for breakage, mounting and any other conditions that may affect its operation. Any damaged part or guard should be properly repaired or replaced.



It is dangerous to operate the machine when the floor is slippery. Keep the floor clean and dry. Check for ice, moisture, or grease before entering.



Do not use the machine to cut explosive material or high pressure vessels as it will generate great amount of heat during the sawing process and may ignite an explosion.



Keep your work area clean. Cluttered and slippery floors invite accidents.



Keep blade protection cover and wheel covers in place and in working order.



Never operate while under the influence of drugs, alcohol or medication.



Do not reach over or stand on any part of the machine.



Keep the work environment safe. Do not use band saw in a damp or wet location.



Keep all guards and shields in place before installing or starting up the machine.



Keep unauthorized personnel away.

SAFEGUARD DEVICES

The safeguard devices incorporated in this machine include the following two main parts:

1. Protection covers & guards
2. Safety-related switches

Protection Covers & Guards

1. Idle wheel housing cover
2. Drive wheel housing cover
3. Gear reducer cover
4. Wire brush belt cover
5. Blade guard cover (left & right)
6. Safety fence (left & right)(CE model only, as shown in Illustration: *Safety Fence*)
7. Chip conveyor cover (CE model only)



The protection devices should always be mounted on the machine whenever the machine is running.



Do not remove any of these safeguard devices under any circumstances except when servicing the machine. Even skilled service technicians should still take cautions when performing repairs or service on the machine with any of these protectors removed. It is the responsibility of the user to make sure all these elements are not lost and damaged.



Take note of the following main moving parts on the machine prior to and during machine operation:

- Saw bow assembly
- Drive and idle wheels
- Blade guide arm
- Saw blade guide rollers
- Quick approach device (optional)
- Wire brush
- Chip conveyor (optional)
- Workpiece clamping vises
- Shuttle vises and workbed rollers
- Top clamps (optional)
- Gear reducer

Safety Related Switches

To protect the operator, the following safety related switches on the machine are actuated when the machine is in operation.

Wheel motion detector	This is a proximity sensor used to detect the motion of the drive wheel. Once the saw blade is broken or as soon as it starts slipping, the sensor will detect and stop the drive wheel and the machine.
Power switch	Located on the cover of electrical cabinet, the power switch controls the main power of the machine. Up to your company's internal rules, this power switch can be locked with a padlock or a luggage lock to protect the operator and the machine.
Emergency stop button	Located on the control panel, the button when pressed will stop the machine completely.
Vise clamp switch	This switch assures firm clamping of the workpiece. If the workpiece is not clamped properly, the saw blade is not allowed to run.
Wheel cover interlock switches (CE model only)	Located on the two wheel housings, these switches are used to assure that the machine will stop whenever the wheel covers are open. This device is to protect users from being cut by the running saw blades.

Among all these safety switches, some of them are used to protect the users and some of them are used to prevent damage to saw blades, the workpiece and the machine itself, etc. We have taken every precaution to prevent injury or damage and to provide safe and economical operation of the machine.

EMERGENCY STOP


Designed to be easily accessible, the emergency stop button is located on the left bottom corner on the control panel and is made in red color and rubber material. For CE models, supplementary emergency stop button may be available at other area(s) of the machine depending on machine type. Please refer to *Illustration: Emergency Stop*.

When you press the button, the machine will immediately come to a full stop to avoid injury or damage when an accident occurs. The button will be locked when you press it. To unlock it, turn the button clockwise.

You should press it immediately without any hesitation when observing:

- An emergency situation that would cause any injury or damage
- An abnormal situation or problem such as fire, smoke, abnormal noise and etc.

Illustration: Emergency Stop

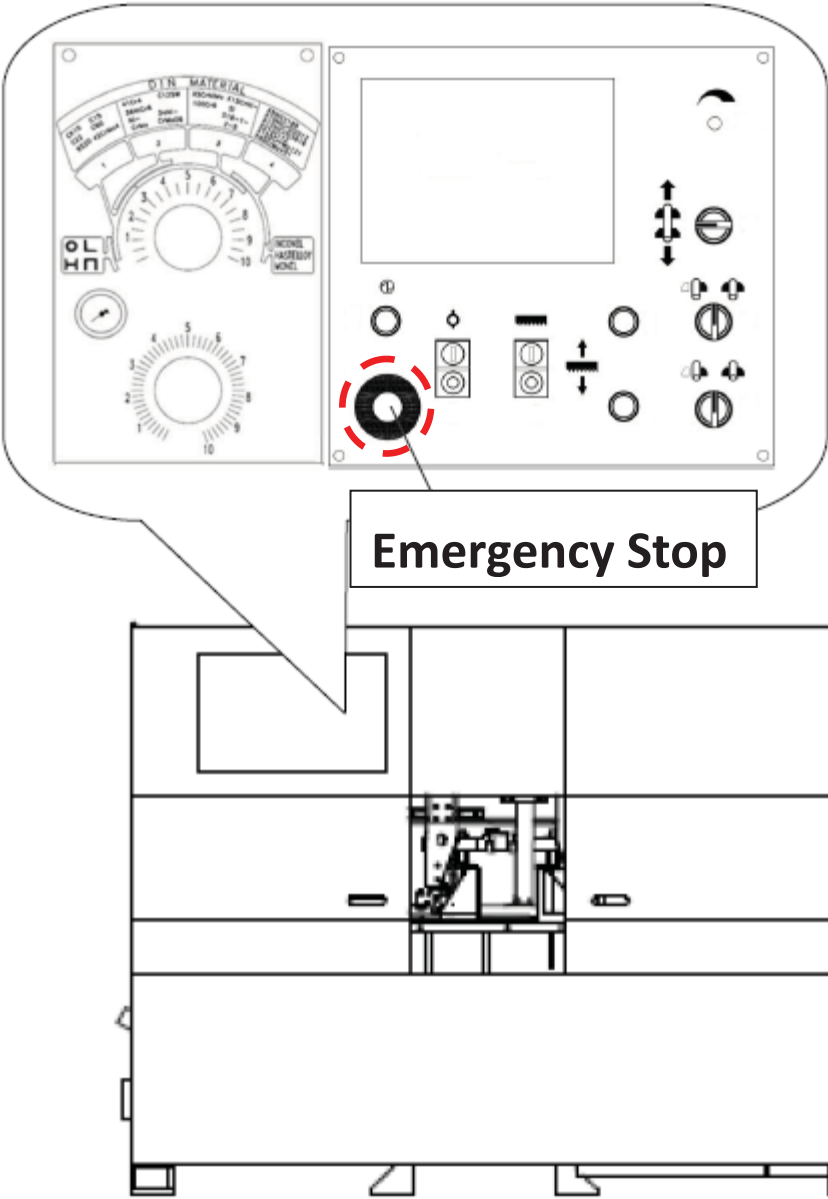


SAFETY LABELS

Please read through and understand these safety labels before operating the machine. Refer to *Illustration: Safety Labels*.

Label	Meaning	Label	Meaning
	Impact Hazard WEAR SAFETY SHOES. Do not approach dropping area during operation.		Read Operator's Manual This manual has important safety information. Read through it carefully before operating this machine to prevent personal injury or machine damage.
	Keep Unauthorized Personnel Away		Do not step. Do not stand on the machine or on the accessories!
	DANGER: Running Blade Blade runs through this area. Keep your hands away from a running blade to avoid severe injury. The arrow indicates direction of the blade.		Cutting Hazard KEEP COVER CLOSED / KEEP HAND OFF while the blade is running. Turn power off before opening cover. Failure to follow the warning can result in severe injury.
	Hazardous Voltage TURN POWER OFF before servicing. Failure to following the warning can result in severe injury.		Burn Hazard/Hot Surface
	Hand Crush/Force from Above		Crush hazard by vise
	Loose Hand Hazard KEEP HAND OFF. Do not touch chip conveyor. Failure to follow the warning can result in severe injury.		Pinch Point/Hand Entanglement
	CAUTION : Class I invisible Laser Radiation Present. Avoid direct exposure to beam.		

Illustration: Safety Labels

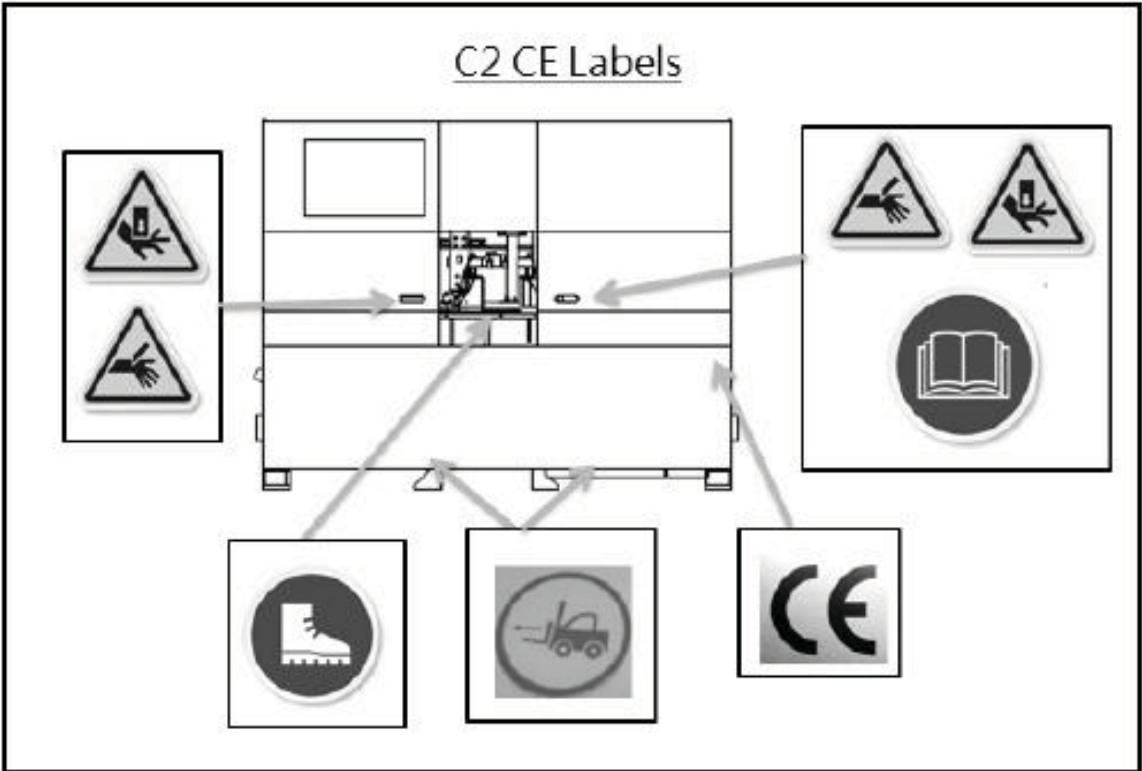

HEARING PROTECTION



Always use ear protection!

When your machine is running, noise generated by the machine may come from the following:

- Saw blade during cutting or material feed mechanism
- Wire brush unit
- Chip conveyor unit
- Speed reducer
- Hydraulic motor/pump
- Belt transmissions variable speed motors
- Blade motor
- Coolant pump
- Drive wheel
- Parts not assembled tightly causing mechanical vibration

Our products pass noise testing less than 78 dBA. Noise level vary according to working conditions and we recommend ear plugs or other hearing protection at all time. If your machine produces an undesirable noise while it is running, you should:

1. Make sure all maintenance tasks have been performed following the prescribed maintenance schedule (Refer to Section 6).
2. If maintenance does not seem to solve the problem, follow the troubleshooting procedures under Section 7.

CE COMPLIANCE

Cosen's CE model is designed to satisfy regulations of the Council Directive on the approximation of the laws of the Member States relating to machinery (2006/42/EC) - Annex I Essential health and safety requirements relating to the design and construction of machinery.

RISK ASSESSMENT

Risk assessment generally takes account of intended use and foreseeable misuse, including process control and maintenance requirements. We made every effort to avoid any personal injury or equipment damage during the machine design stage. However, the operator (or other people) still needs to take precautions when handling any part of the machine that is unfamiliar and anywhere on the machine that has potential hazards (e.g. the electrical control box).

GENERAL INFORMATION

SPECIFICATION

MACHINE PARTS IDENTIFICATION

FLOOR PLAN

This band saw machine is designed by Cosen's R&D engineers to provide you the following features and advantages:

Safety

- This machine is designed to fully protect the operator from its moving parts during cutting operation.
- The machine and each component has passed strict testing (Council Directive on the approximation of the laws of the Member States relating to Machinery).
- The machine will shut off automatically when the saw blade is broken, protecting both the operator and the machine.

Convenience & High-Performance

- The machine is designed in the way that the operation and adjustment can be easily performed.
- The machine will stop automatically when out of stock.
- Dual valve system is designed to achieve optimal cutting performance with the simple setting of feed rate and perspective cutting pressure for different material.

SPECIFICATION




Model / Name of Equipment		C2 NC Fully Automatic Horizontal Bandsaw
Max. Cutting Capacity	Round	260 mm (10.2")
	Square	260 mm (10.2")
	Rectangle (H x W)	260 x 300 mm (10.2" x 11.8")
Top Clamp Capacity	Bundle Cutting	W: 130 ~ 200 mm (5.12" ~ 7.8") H: 50 ~ 125 mm (1.97" ~ 4.92")
Saw Blade	Speed	15~80 m/min (49~262 ft/min)
	Size (L x W x T)	4,100 x 34 x 1.1 mm (161.4" x 1.33" x 0.043")
	Pressure	30~34 kgs / cm ² (Tolerance: +1~+2 kgs / cm ²)
	Tension	Hydraulic with automatic blade breakage detection 2200~2300 kgs / cm ² (Tolerance: +100~+150 kgs / cm ²)
	Guide	Interchangeable tungsten carbide
	Cleaning	Steel wire brush with flexible drive shaft driven by main motor
Main Electricity Output *	Saw Blade	5 HP (3.75 kW)
	Hydraulic	1 HP (0.75 kW)
	Coolant Pump	1/8 HP (0.09 kW) Option : 1/4HP (0.18kW)
	Other Electri. Components	-----
Tank Capacity	Hydraulic	20 L (5.3 gal)
	Coolant	45 L (11.9 gal)
Vise Clamping	Control Method	Hydraulic with full stroke cylinder, NC automatic
	Pressure	23 kg/cm ²
	Minimum Clamping Capacity	0 mm
Remnant Length		-----
Feeding	Control Method	Hydraulic, NC Automatic
	Vise-Clamping Material Pull Weight	-----
	Speed	-----
	Length	Single Stroke
Multi Stroke		Max. 99 meter (3897 in)
Workbed	Height	800 mm (31in)
	Weight Capacity	-----
Weight	Net	1,600 kg (3,530 lb)
	Gross	1,800 kg (3,970 lb)
Floor Space (L x W x H)		3,158 x 2,371 x 1,915 mm (124.3" x 93.3" x 75.4")

*Please refer to the formula "Watt/Voltage = Amperage" with the information above.


*Design and specification are subjected to change without notice.

* The saw blade pressure and tension standard above are the general values. For special saw blade, please contact to the saw blade manufacturer for the applicable values.


MACHINE PARTS IDENTIFICATION

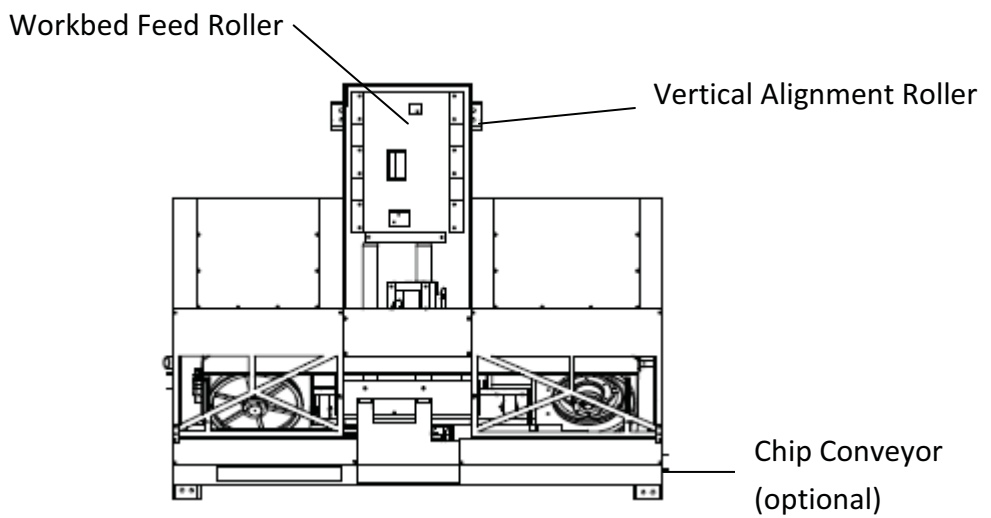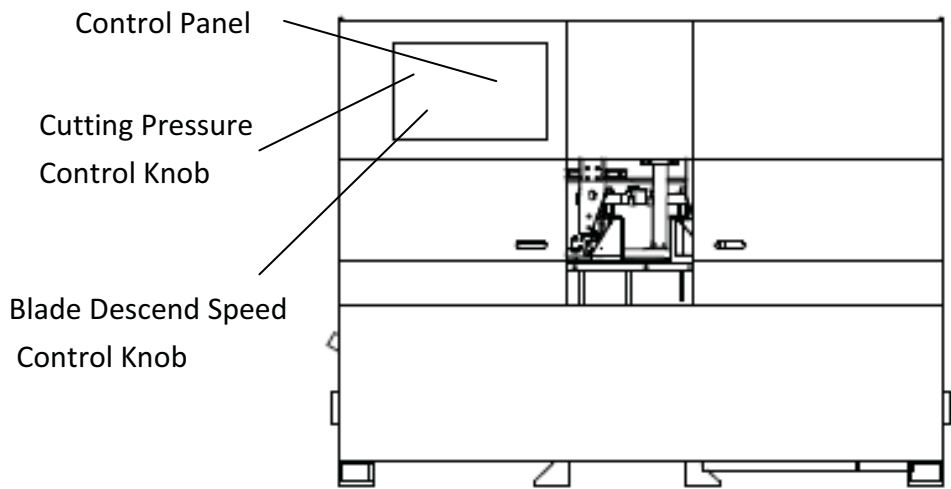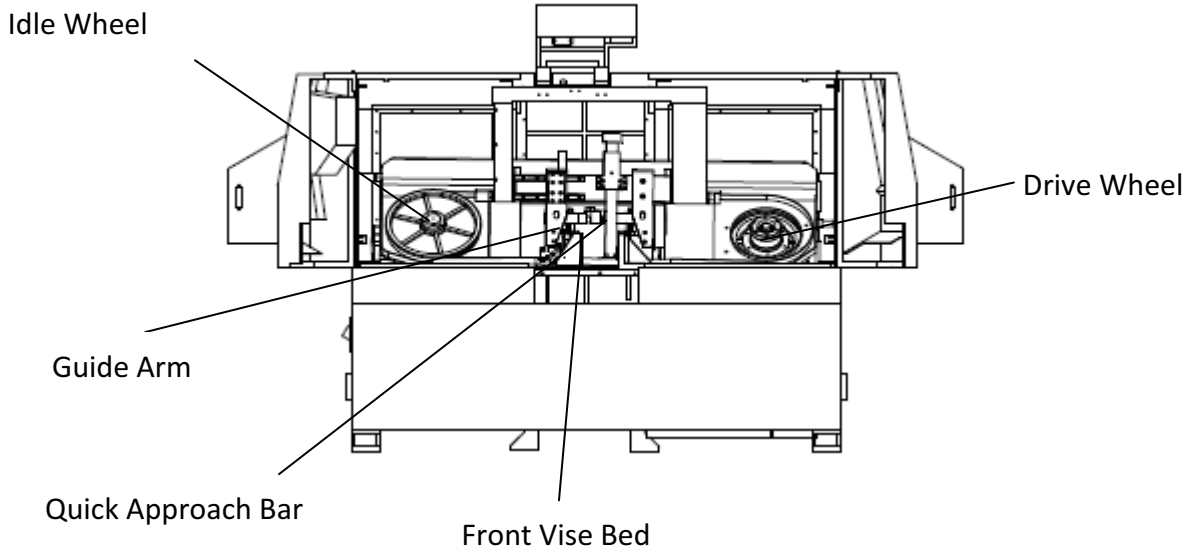


FLOOR PLAN

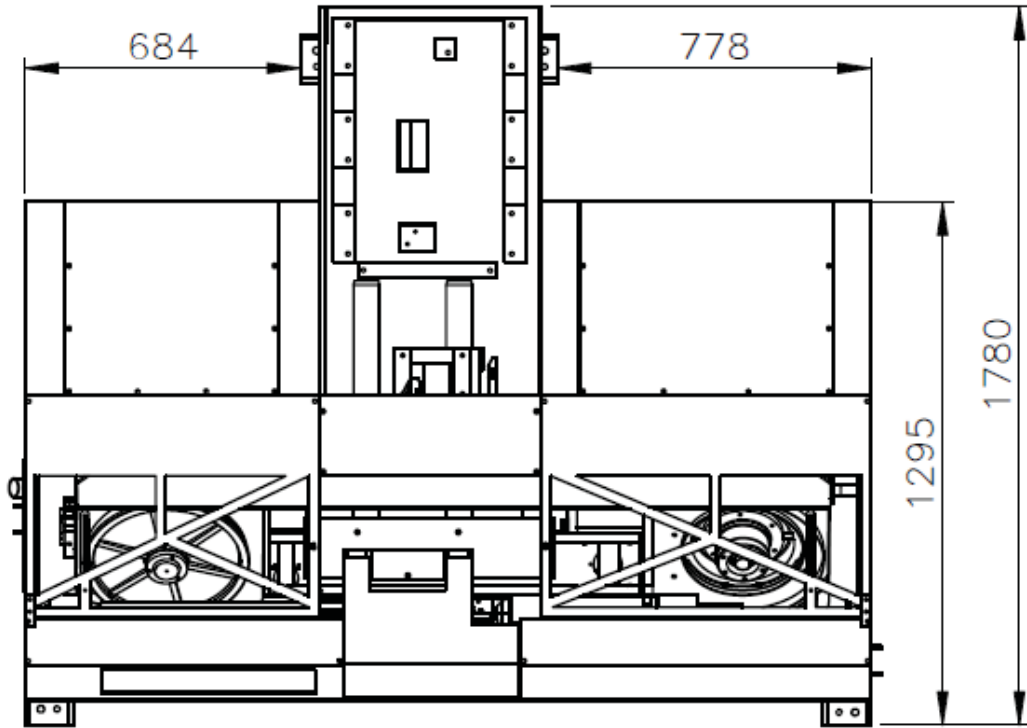


Machine top view (with the doors closed)

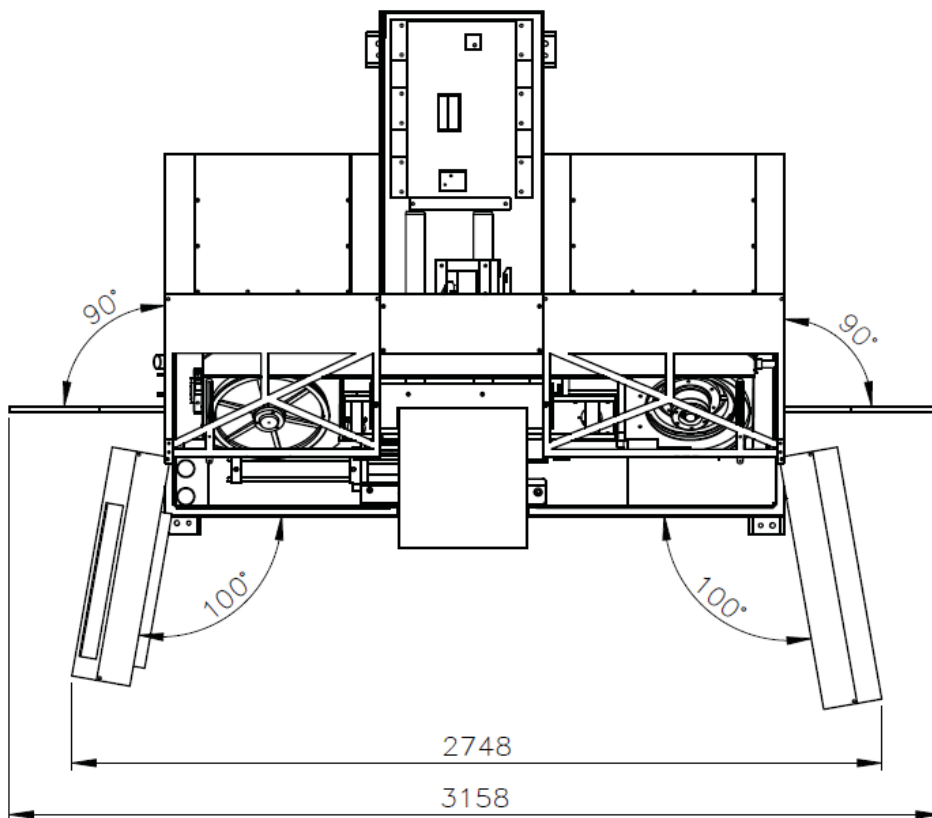


Machine top view (with the doors open)

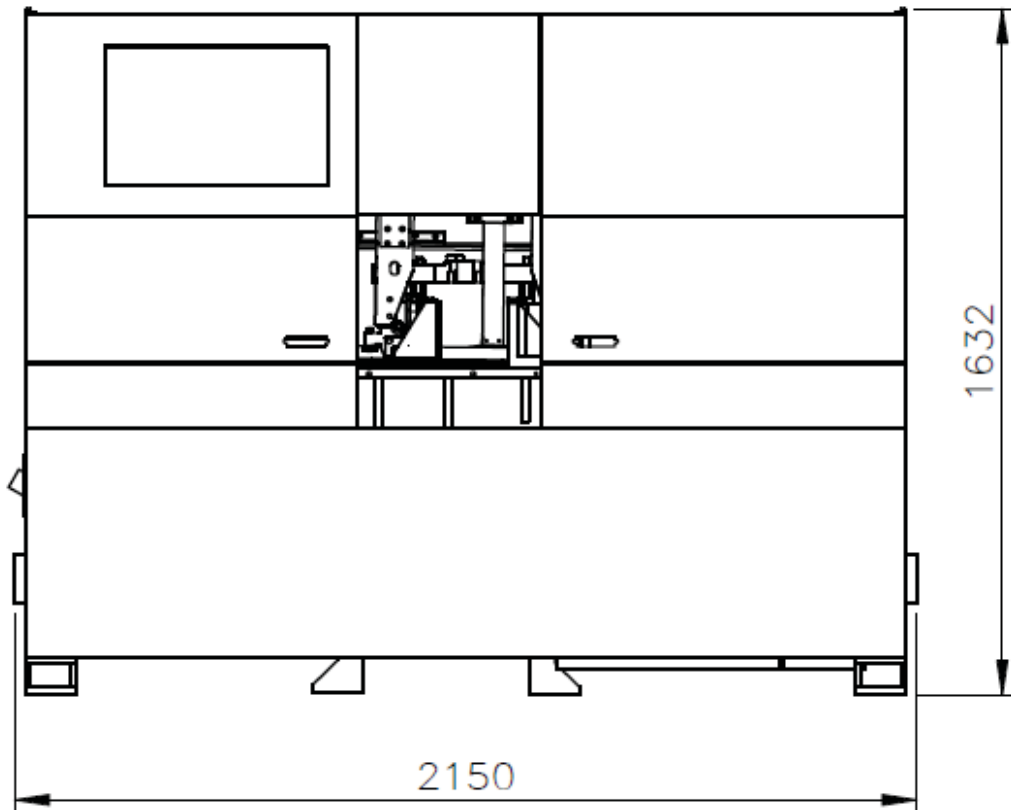

Machine front view (with the doors closed)

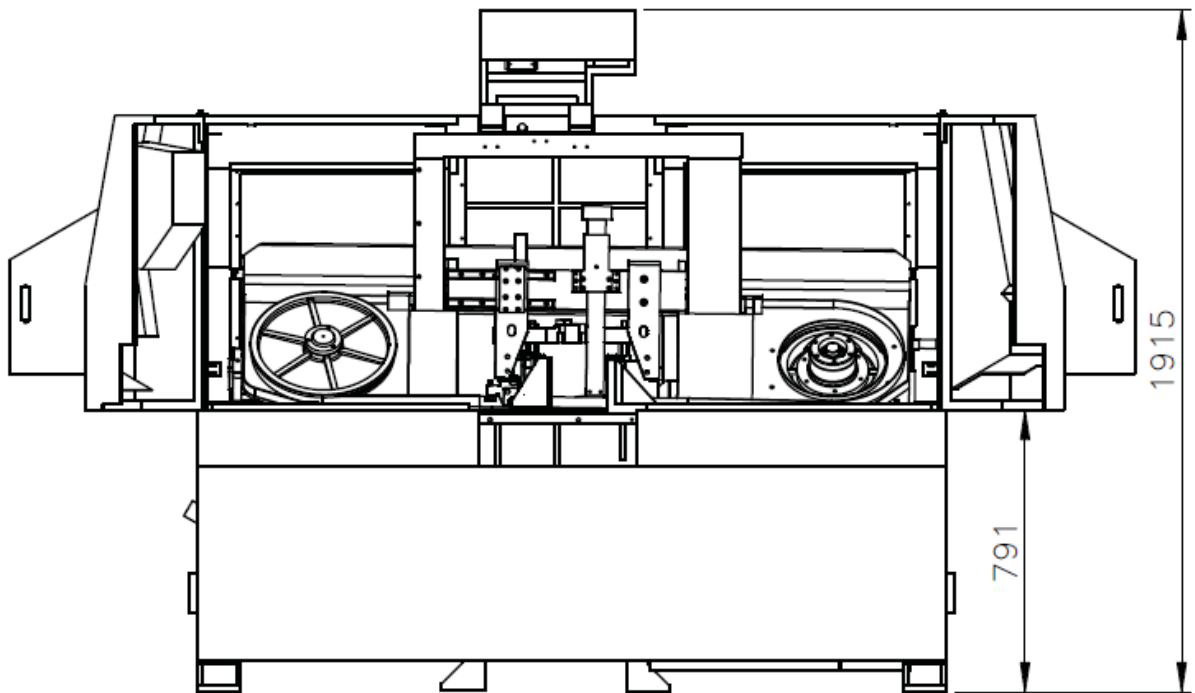

Machine front view (with the doors open)

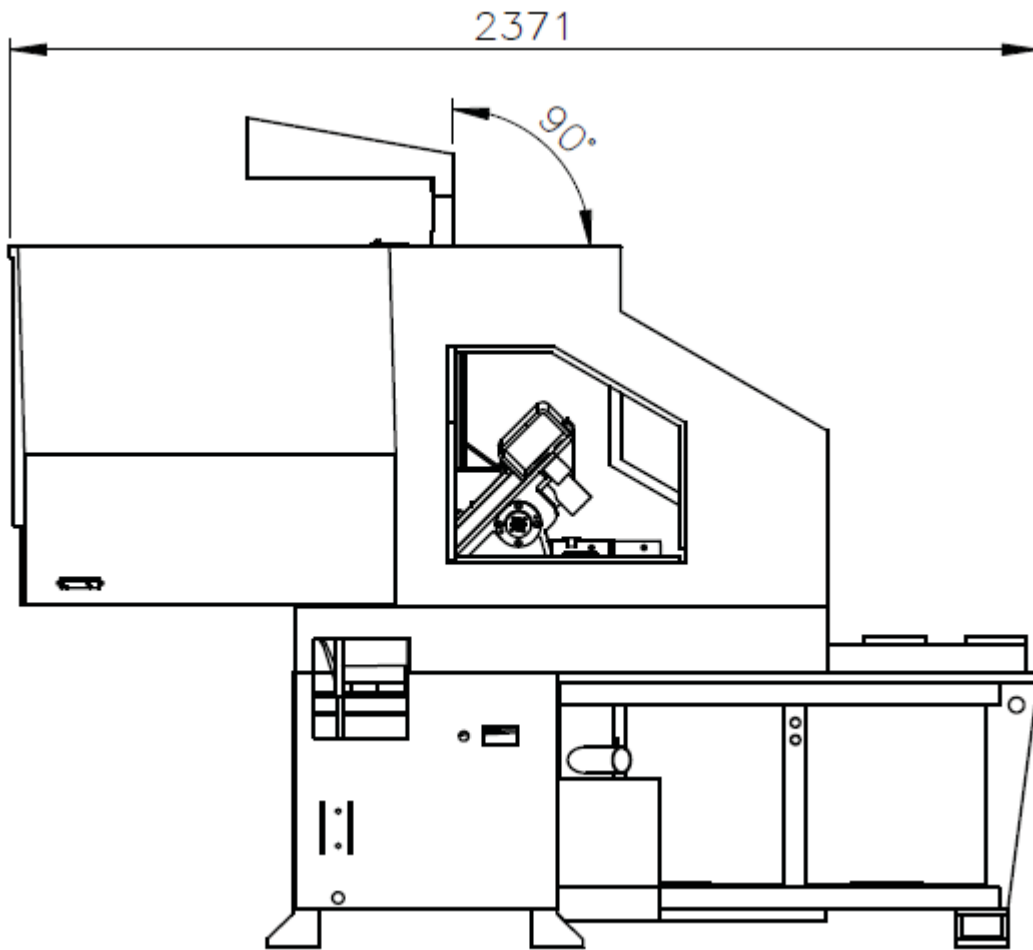

Machine side view

MOVING & INSTALLATION

LOCATION & ENVIRONMENT

UNPACKING & INSPECTING

LIFTING

REMOVING SHIPPING BRACKET

CLEANING

INSTALLING

RELOCATING

LOCATION & ENVIRONMENT

For your safety, please read all information regarding installation before proceeding. Install your machine in a place satisfying all of the following conditions:

Space:

- Leave enough free space around the machine for loading work and unloading cut-off pieces as well as for maintenance and inspection. Refer to *Section 2 General Information - Specification* for machine dimensions and floor space.

Environment:



- Well lighted (500 lumen at minimum).
- Floor kept dry at all times in order to prevent operators from slipping.
- Away from direct exposure to the sunlight
- Room temperature between 5°C to 40°C.
- Humidity level kept at 30%~85%“(without condensation) to avoid dew on electric installation and machine.
- Away from vibration of other machines
- Away from powders or dusts emitted from other machines
- Avoid uneven ground. Choose a solid level concrete floor which can sustain weight of both machine and material.
- Limit the operation area of the machine to staff only.



UNPACKING & INSPECTING

- Unpack your machine carefully to avoid damage to machine parts or surfaces.
- Upon arrival of your new band saw, please confirm that your machine is the correct model and it comes in the same specification you ordered by checking the model plate on the machine base.
- It is also imperative that a thorough inspection be undertaken to check for any damage that could have occurred during shipping. Pay special attention to machine surface, equipments furnished and the electrical and hydraulic systems for damaged cords, hoses and fluid leaks.
- In the event of damage caused during shipping, please contact your dealer and consult about filing a damage claim with the carrier.
- Your machine comes in with a set of tools for you to maintain the machine. The accessories furnished are as follows:
 1. Tool box 1 pc
 2. Grease gun 1 pc
 3. Screwdriver (+, -) 2 pcs
 4. Open-ended spanner 3 pcs
 5. Hexagon wrench 1 set
 6. Chip spade (only for manual models) 1 pc
 7. Operation manual 1 pc



Should you find any missing accessories, please contact your local agent immediately.

LIFTING

When moving the machine, we strongly suggest you choose any one of the methods described below to move your machine.



1. **Use a crane (Only applies to the machine with the design of the hanging point.)**

Move the machine to its location by using a crane and a wire rope sling that can fully withstand the weight of the machine (refer to machine specification under Section 2 *General Information*).




Machine hanging with a crane should be done strictly according to the hanging points designated by the original manufacturer. If there is any doubt on missing hanging points on your machine, please consult with the original manufacturer or its qualified agent before hanging the machine.


- Machine lifting is likely to damage the machine if not performed properly.



Warning: You must have a qualified crane operator to perform the job.

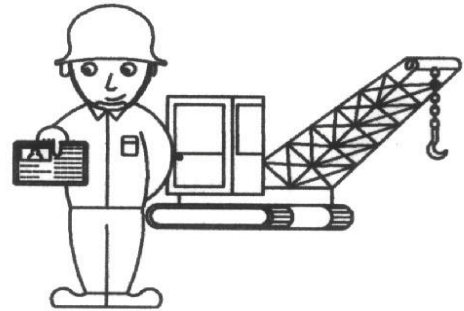


- You must use tools and equipment with the proper tensile strength and use proper method when moving your machine.

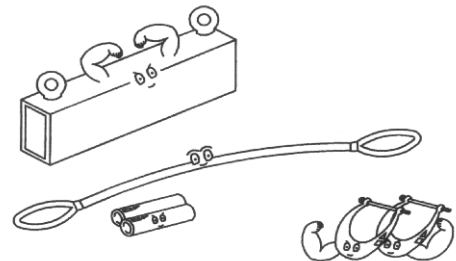


- Apply the wire rope sling to the lifting hooks on the four ends of the machine. **Refer to *Illustration: Lifting Points for exact locations.***

- Slowly lift the machine. Be sure to protect the machine from impact or shock during this procedure. Also watch out your own fingers and feet to avoid injuries.

- Keep the machine well balanced during lifting process and make sure the wire rope does not interfere with the saw frame.

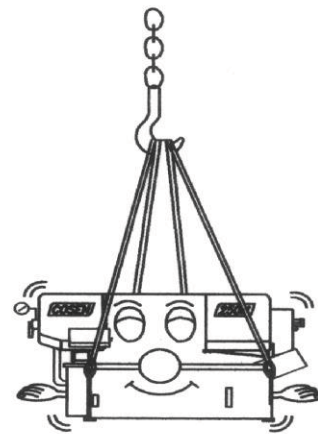

- When you work together with more than two people, it is best to keep constant verbal communication with each other.

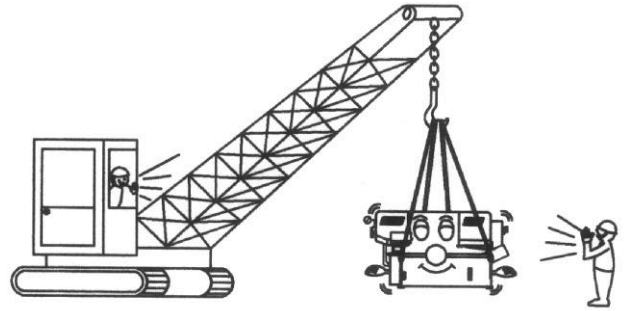

2. **Use a forklift (Only applies to the machine with the design of the lifting point.)**

Make sure that the lifting rod can fully withstand the weight of the machine. (Refer to *Section 2 – General Information for Specifications.*)



Machine lifting with a forklift should be done strictly according to the lifting points designated by the original manufacturer. If there is any doubt on missing lifting points on your machine, please consult with the original manufacturer or its qualified agent before lifting the machine.

- Machine lifting is likely to damage the machine if not performed properly.




You must have a qualified forklift operator to perform the job.



- You must apply proper forklift technique to avoid damage to the machine.




Make sure the forks are able to reach in at least 2/3 of the machine depth.

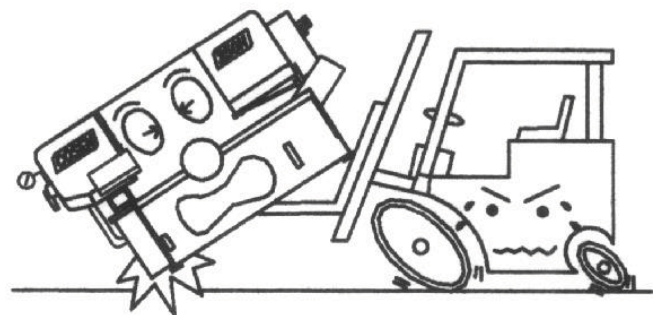

- You must keep the machine balanced at all times.



Make sure the forks are centered before use.

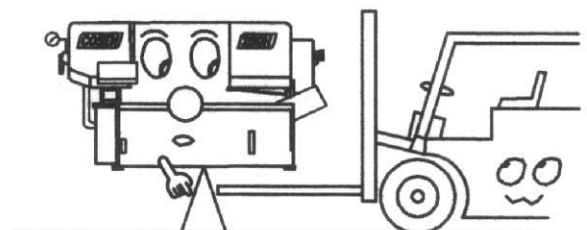


(Illustration only. Please follow user guide of your forklift.)

3. Use rolling cylinders

You can use rolling cylinders to move your machine in a small machine shop environment.

- You must use rolling cylinders made in material of proper compressive strength.

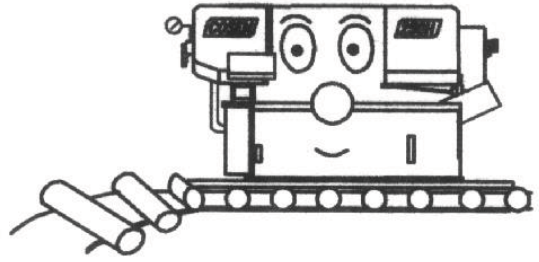

4. Other ways to move

If the machine does not have




or



stickers, please contact your local agent immediately.

Illustration: Lifting Points

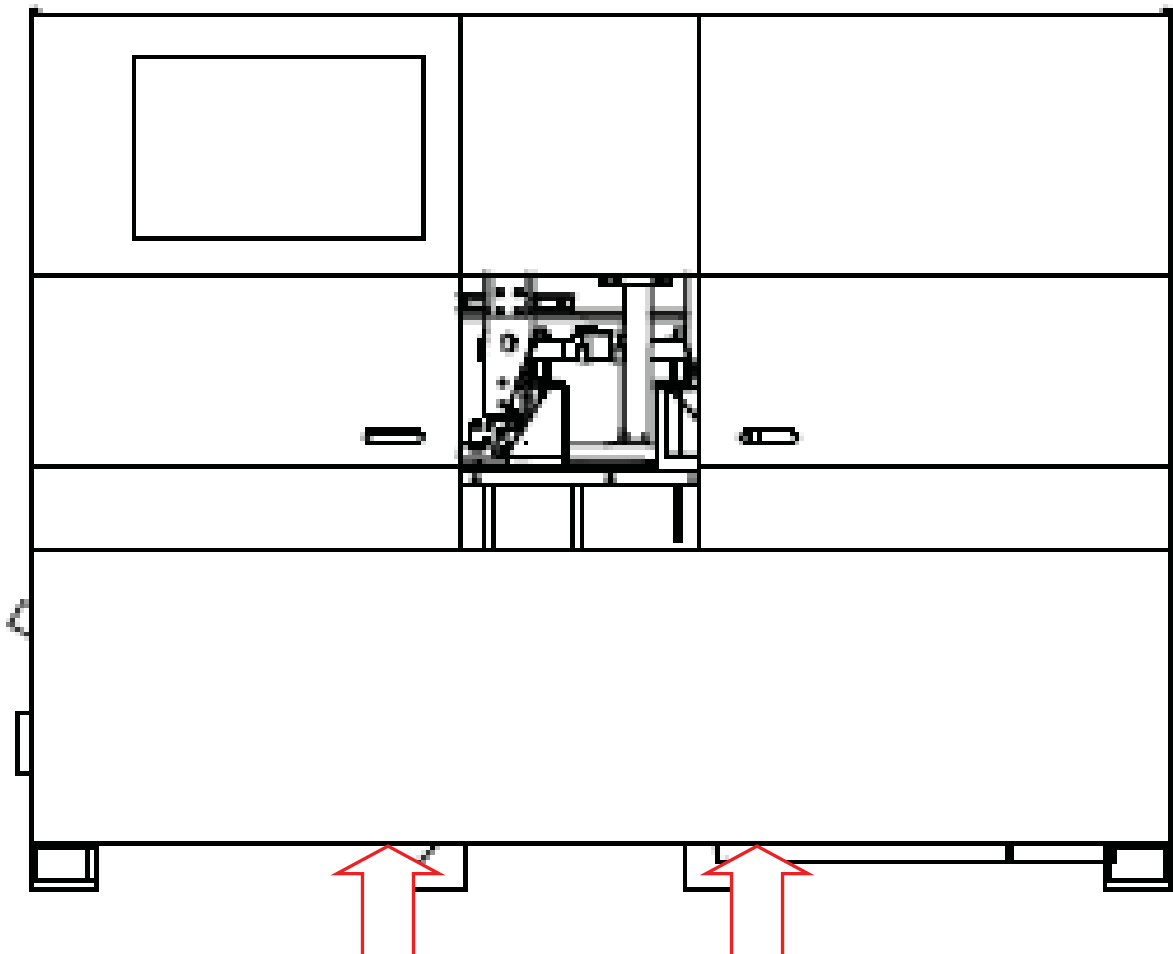

Minimum weight capacity for each fork required: 1.5 ton

Total number of fork required: 2

REMOVING SHIPPING BRACKET

- After the machine has been properly positioned, remove the shipping bracket that is used to lock the saw frame and the saw bed.
- Retain this bracket so that it can be used again in the event that your machine must be relocated.

CLEANING


After the machine has been placed at the designated position, remove the rust-preventive grease with wiping cloth dampened with cleaning oil or kerosene. Apply machine oil to machine surfaces that are prone to rust.



Do not remove the rust-preventive grease with a metal scraper and do not wipe the painted surfaces with solvent as doing so would damage surface paint.

INSTALLING

Cosen's bandsaw machine is relatively easy to install. Follow these six easy steps to install your machine.

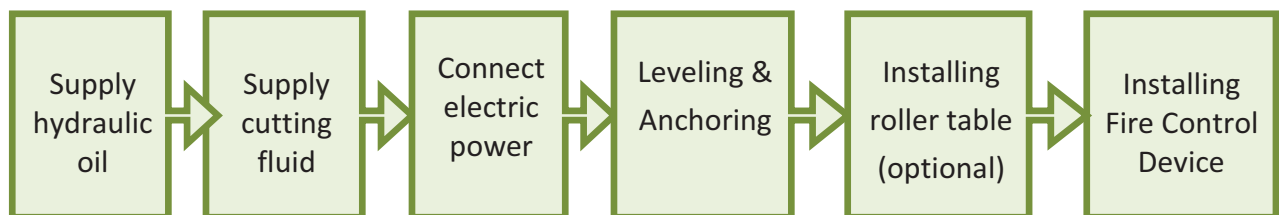

Supplying hydraulic oil

Open the filler cap and fill the hydraulic oil tank to above 2/3 or full level.

Check the sight gauge to make sure the oil level in the tank.



Refer to specification chart under Section 2 for tank capacity.



Oil tank should be full already if it is a new machine that operates for the first time.



Supplying coolant

Fill the coolant tank to the middle level of the sight gauge by pouring the coolant from above the chip conveyor.

Use the sight gauge to check the coolant level remaining in the tank.



Always check the coolant supply before starting the machine. If the coolant pump is started without enough coolant supply in the tank, the pump and its drive motor may be damaged.



Refer to specification chart under Section 2 *General Information* for tank capacity.



Consult your coolant supplier for bandsaw use regarding coolant type and mix ratio.

Connecting electric power



Have a qualified electrician make the electrical connections.



If the power supply voltage is different from the transformer and motor connection voltage shown on the label attached to the electrical compartment of the machine, contact COSEN or your agent immediately.



Connect to power supply independently and directly. Avoid using the same power supply with electric spark machines such as electric welder. Unstable electric tension may affect your machine's electric installation from working properly.



Ground the machine with an independent grounding conductor.



Supply voltage: 90% - 110 % of nominal supply voltage.



Source frequency: 99% - 101 % of nominal frequency.



Refer to the specification chart under Section 2 for total electric power consumption of the motors and make sure your shop circuit breaker is capable of this consumption amount. Also use a power supply cable of proper size to suit the power supply voltage.

1. Turn off the shop circuit breaker.
2. Make sure the machine circuit breaker switch on the electrical compartment door is turned to OFF.
3. Remove the screw securing the electrical compartment and then open the door.
4. Pull the power supply cable and grounding conductor through the power supply inlet into the electrical compartment. (Shown right)
5. Connect the power supply cable to the circuit breaker (N.F.B.) to the R, S and T terminals, and connect the ground cable to the E terminal.
6. Close the compartment door and fasten the screw back.
7. Turn on the shop circuit breaker and then turn the machine circuit breaker switch to ON. The *Power Indicator* on the control panel will come on.
8. Turn clockwise to unlock the *Emergency Stop* button and press the *hydraulic ON* button to start the hydraulic motor.
9. Make sure the sawing area is clear of any objects. Start the blade and check the blade rotation. If the electrical connections are made correctly, the blade should run in a counterclockwise direction. If not, shut the hydraulics off, turn off the machine as well as the shop circuit breaker. Then swap the power the power cable conductors connected to R and T terminals.
10. Repeat step 6 to 9 to ensure the electrical connections are in the right order.




Power
Supply
Inlet

Leveling

Place spirit level on the vise slide plates and the work feed table.

Level the machine in both directions i.e. along and across the machine. Adjust the level of the machine by turning the leveling bolts.

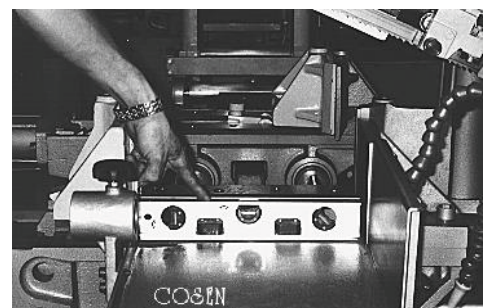

Make sure all leveling bolts evenly support the machine weight.

Anchoring

Normally there is no need to anchor the machine. If the machine is likely to vibrate, fix the machine to the floor with anchor bolts.

Shock absorption steel plates are provided and can be placed under each leveling bolt to prevent their sinking into the concrete floor.

Installing roller table (optional)

The roller table is used to support long material at the rear and/or the front of the machine.

If you have ordered the optional roller table for cutting long material, position it before or behind the machine.

Level the roller table and the stand with the machine by adjusting the leveling bolts.



Installing Fire Control Device

Install a fire extinguisher or any other fire control device in the shop in case a fire breaks out.

RELOCATING

We recommend you follow these procedures when relocating or shipping your machine to other place:

1. Descend the saw frame to its lowest position then turn off the power.
2. Fix the saw frame using the shipping bracket that originally came with the machine.
3. If you are shipping the machine, pack the machine carefully with industrial plastic wraps to protect it from dust.
4. Use a crane or forklift to raise it. If a crane is used to lift the machine, ensure that the lifting cable is properly attached to the machine.
5. Do not forget to include the equipments originally furnished including the shock absorption steel plates and the instruction manual.

OPERATING INSTRUCTIONS

SAFETY PRECAUTIONS

BEFORE OPERATING

CONTROL PANEL

STANDARD ACCESSORIES

OPTIONAL ACCESSORIES

UNROLLING & INSTALLING THE BLADE

ADJUSTING WIRE BRUSH

ADJUSTING COOLANT FLOW

PLACING WORKPIECE ONTO WORKBED

POSITIONING WORKPIECE FOR CUTTING

ADJUSTING BLADE SPEED

BREAKING-IN THE BLADE

TEST-RUNNING THE MACHINE

CUTTING OPERATION

USING TOP CLAMP FOR BUNDLE CUTTING

TERMINATING A CUTTING OPERATION

SAFETY PRECAUTIONS

For your safety, please read and understand the instruction manual before you operate the machine. The operator should always follow these safety guidelines:



- The machine should only be used for its designated purpose.
- Do not wear gloves, neckties, jewelry or loose clothing/hair while operating the machine.



- For eye protection, always wear protective safety glasses.
- Check the blade tension and adjust blade guides before starting the machine.
- Use auxiliary clamping or supporting devices to fix material in place before cutting long workpieces. Always make sure the material is clamped firmly in place before starting to cut.
- Do not remove jammed or cut-off pieces until the blade has come to a full stop.
- Keep fingers away from the path of the blade.



- Protection devices should be in place at all times. For your own safety, never remove these devices.
- Disconnect machine from the power source before making repairs or adjustments.



- Wear protection gloves only when changing the blade.



- Do not operate the machine while under the influence of drugs, alcohol or medication.



- Do not take your eyes off the machine while in operation.
- Do place warning signs to mark out machine work zone and restrict entry to be staff-only.

BEFORE OPERATING

Choosing an appropriate saw blade and using the right cutting method is essential to your cutting efficiency and safety. Select a suitable saw blade and cutting method based on your work material and job requirements e.g. cutting accuracy, cutting speed, economic concern, and safety control.

Wet cutting

If you choose dry cutting or low-speed cutting, the chips may accumulate in machine parts and may cause operation failure or insulation malfunction. We suggest you choose wet cutting to avoid machine damage.

Cutting unknown materials

Before cutting an unknown material, consult the material supplier, burn a small amount of chips from the material in a safe place, or follow any other procedure to check if the material is flammable.



Never take your eyes off the machine while in operation.

Cutting fluid

For cooling and lubrication purpose, we recommend you use water-soluble cutting fluids. The following table lists out its pros and cons for your reference.

Pro	Con
<ul style="list-style-type: none">• Have a high cooling effect• Not flammable• Economical• Does not require cleaning of the cut products	<ul style="list-style-type: none">• Remove machine paint• Lose its rust protection effect if deteriorated• Tend to create foam• Subject to decay• Decline in performance, depending on the quality of the water used for dilution



Never use water as your coolant.



Always add coolant into water for better mix result.




Consult your coolant supplier for bandsaw use regarding coolant type and mix ratio.



Before starting a cutting job, make sure there is sufficient amount of coolant in the tank. Check the fluid level through the sight gauge. Please refer to machine specifications in this manual (Section 2) for tank capacity.

CONTROL PANEL

The control panel is located on the top of the electrical box. It includes the following function: power system, hydraulic system, cooling system and the human-machine–interface (HMI). The operator must fully understand the function of each switch and button before operating the machine.

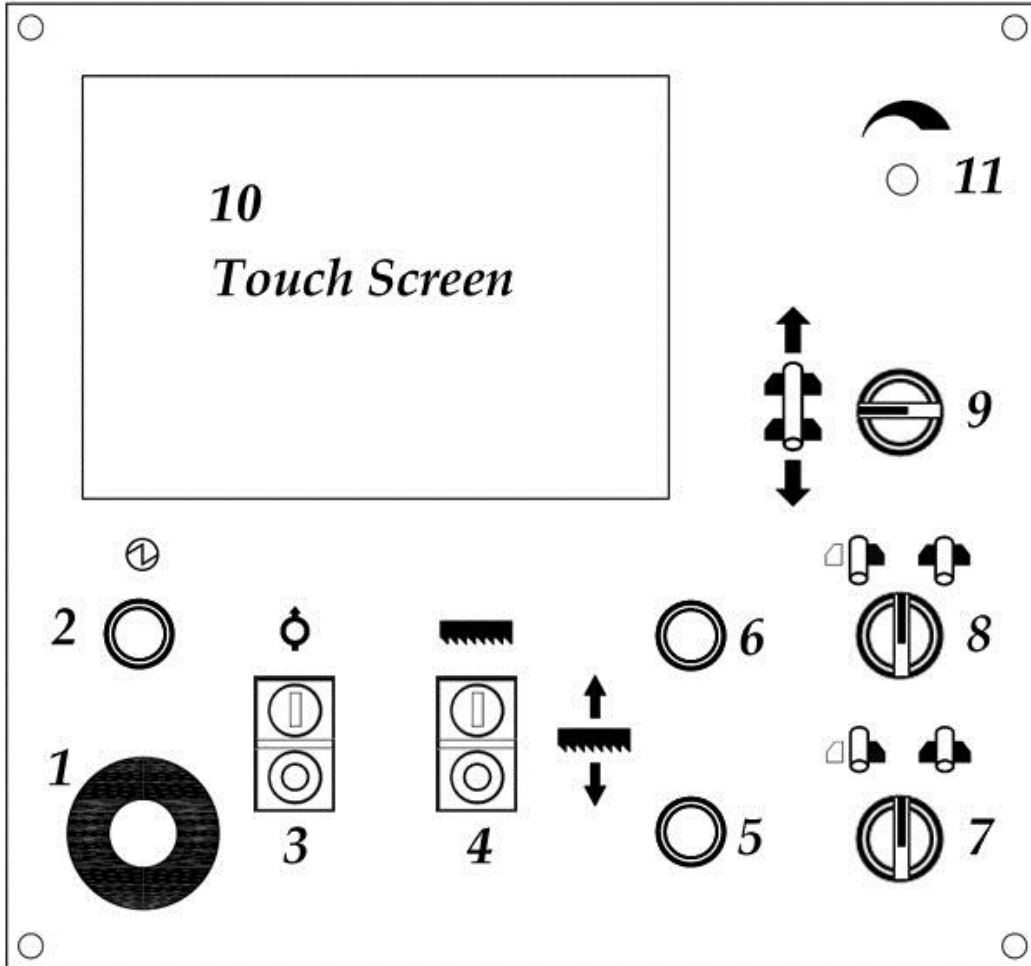

No.	Name	No.	Name
1	Emergency stop button	7	Front vise clamp/open selector switch
2	Power indicator lamp	8	Rear vise clamp/open selector switch
3	Hydraulic start/stop buttons (with built-in light)	9	Feed forward/backward selector switch
4	Saw blade start/stop buttons (with built-in light)	10	HMI touch screen
5	Saw bow down button	11	Blade speed control knob (Inactive; moved into HMI system)
6	Saw bow up button		

Control Buttons

1. Emergency stop button

Press this button to stop the machine in an emergency. When the button is pressed, it brings the machine to a full stop. The button locks when pressed. In order to unlock it, please turn the button clockwise.

2. Power indicator lamp

When the lamp is on, it indicates the power to the machine is turned on.

3. Hydraulic start/stop buttons (with built-in light)

Press green button to **start** the hydraulic motor and the built-in light will turn on.

Press red button to **stop** the hydraulic motor and the built-in light will turn off.



When the *emergency stop* button is pressed, the hydraulic motor will be shut off.



When the hydraulic motor is turned on, the chip conveyor will start running at the same time.

Please take cautions and keep your hands away from chip conveyor.

4. Saw blade start/stop buttons (with built-in light)

Press green button to **start** the blade drive motor and the built-in light will turn on.

Press red button to **stop** the blade drive motor and the built-in light will turn off.



If idle wheel and drive wheel housing covers are open during cutting, saw blade will immediately stop in 2 seconds to protect the operator.

5. Saw bow down button

When this button is pressed, the saw bow descends until the operator lets go of the button or until the saw bow reaches the lowest position and touches the lower limit switch.

6. Saw bow up button

When this button is pressed, the saw bow rises until the operator lets go of the button or until the saw bow reaches the highest position and touches the upper limit switch.



While pressing the *saw bow up* button can stop the running blade, please still use the *emergency stop* button in an emergency.




For the safety concerns, when the idle wheel and drive wheel housing covers are open, all the buttons except *emergency stop* button, *hydraulic stop* button and *saw bow up* button are temporarily unavailable.

7. Front vise clamp/open selector switch

When this switch is turned to the “open” position (to the left), the front vises will continue to open until the operator lets go of the switch. Hold the switch until the desired vise position is reached.

When this switch is turned to the “closed” position (to the right), the front vises will continue to close until the operator lets go of the switch or when the vises are fully clamped. Hold the switch until the desired vise position is reached.




This selector switch only works when the machine is switched to manual mode “”.

8. Rear vise clamp/open selector switch

When this switch is turned to the “open” position (to the left), the rear vises will continue to open until the operator lets go of the switch. Hold the switch until the desired vise position is reached.

When this switch is turned to the “closed” position (to the right), the rear vises will continue to close until the operator lets go of the switch or when the vises are fully clamped. Hold the switch until the desired vise position is reached.




This selector switch only works when the machine is switched to manual mode “”.

9. Feed forward/backward selector switch

When the selector switch is turned to the “forward” position (to the lower left), the feeding workbed will move forward, feeding material forward. Turn and hold the switch to feed forward. As soon as the switch is released, the feeding workbed will stop moving forward.

When the selector switch is turned to the “backward” position (to the upper left), the feeding workbed will move backward, feeding material backward. Turn and hold the switch to feed backward. As soon as the switch is released, the feeding workbed will stop moving backward.



This selector switch only works when the machine is switched to manual mode “”.



This selector switch is only in function when the quick approach bar is touching the upper limit switch AND when either of the front and rear vises are unclamped.



After the blade motor starts running, the function of rear vise is disabled due to safety concerns.

10. HMI touch screen


Please refer to later section for detailed introduction.

11. Blade speed control knob (Inactive; moved into HMI system)

Blade speed is controlled by the inverter located in the control box. This button is now inactive as the blade control function has been moved to the HMI system.

Blade descend pressure and speed control panel

The part of control panel is where cutting pressure and saw bow descend speed can be adjusted.

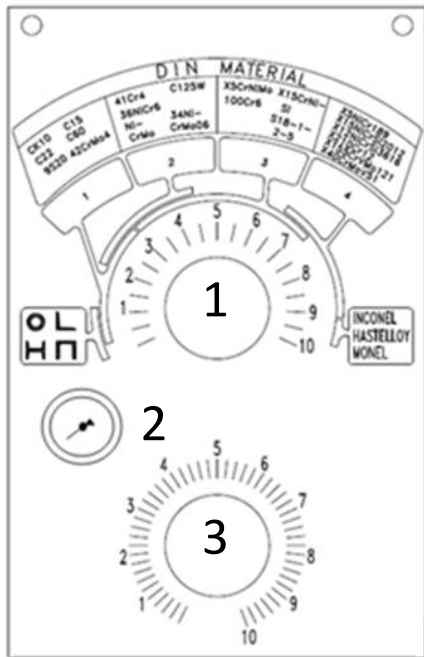

Cutting pressure and speed control panel

1. Cutting pressure control knob

- This pressure control knob is used to adjust the cutting pressure of the blade.
- Turning the knob clockwise increases the cutting pressure.
- To obtain a good cutting result, choose the right cutting pressure by turning the knob until it points to your material on the color chart.

2. Cutting pressure gauge


- The gauge shows the current cutting pressure value, which appears upon a started blade.


3. Blade descend speed control knob


- This knob is used to adjust the descend speed of the saw blade.
- Turning the knob clockwise increases the blade descend speed.
- Blade descend speed is a determining factor to a good cutting time and quality cutoff surface.
- Set the blade descend speed in accordance with the *cutting pressure control* knob.
- Also commonly known as the flow control valve.


Human-machine-interface (HMI) touch screen

This HMI touch screen displays operation messages so that the operator is able to understand the system condition. It also provides different operating modes and selections for the operator to work with. During a cutting job, the operator can still enter the system and make changes to the cutting operation as needed.

 Do not wipe or clean the screen with volatile solvents.

 Do not overexert pressure on the screen. The touch screen is very sensitive; all buttons on the screen just need a slight touch to operate.


 All range parameters in HMI are configured under the “manual” mode.

 Please pay attention to the following environment conditions necessary for HMI touch screen to properly operate:



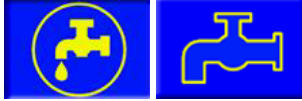




Item	Range
Ambient temperature	5°C ~ 50°C
Temperature for safe operation	-10°C ~ 60°C
Ambient humidity	30%~85% RH (No condensation)
Connection	RS422 MMI port
Environment	No condensation and rust

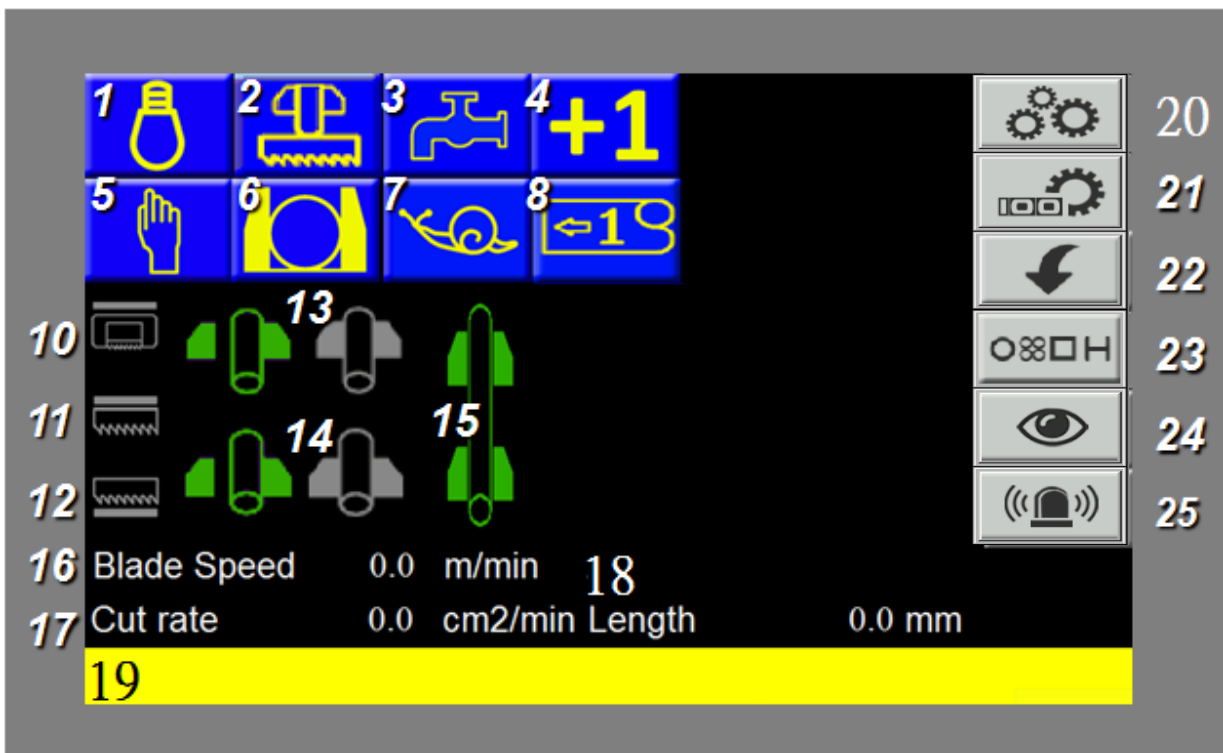









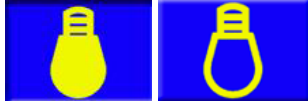


Main control menu










The main control menu includes some operating button that were used on the control panel of the earlier machines. Some convenient functions are added to the page for the operator to better understand the features of the machine. Setting the parameters shown on the screen requires a gentle touch of the finger. You can also look up the parameters or make changes while in the middle of a cut.



















Refer to the table below for descriptions of each function.

No	Item	Function	Description
1		Work light ON/OFF	<p>Press this button to turn on the work light.</p> <p>A solid yellow light bulb icon indicates the lamp has been turned on.</p> <p>Press again to turn off the work light.</p>
2		Material retract 2mm ON/OFF	<p>When this function is turned on, the machine will retract the material for 2mm after completing each cut before the blade rises from its lowest position.</p> <p>A solid yellow icon indicates the Material retract 2mm mode has been turned on.</p>
3		Coolant ON/OFF	<p>Press this button to turn on the coolant pump.</p> <p>A solid yellow faucet icon indicates the coolant pump has been turned on.</p> <p>Press again to turn off the coolant pump.</p>
4		Trim cut ON/OFF	<p>$\boxed{+0}$: indicates the “one cut” in action, as soon as it is finished, will NOT be counted into the “finished cuts,” i.e. “finished cuts” value will increase by 0. (trim cut)</p> <p>$\boxed{+1}$: indicates the “one cut” in action, as soon as it is finished, will be counted into the “finished cuts,” i.e. “finished cuts” value will increase by 1.</p> <p>When under AUTO mode and before proceeding with your automatic cutting jobs, select $\boxed{+0}$ if you wish the first cut to be “trim cut” i.e. trimming the edge of your material without the cut being counted into the “finished cuts.”</p> <p>On the other hand, select $\boxed{+1}$ if you do not need to trim cut the material. The first cut will then be counted as the first cut of your programmed jobs.</p> <p> This function works with automatic mode. Different selections under manual mode has no impact on finished cut figures.</p> <p> Press this button for about 1~2 seconds to switch between $\boxed{+1}$ and $\boxed{+0}$.</p> <p> As soon as the trim cut (i.e. the cut using $\boxed{+0}$ function) is completed, trim cut function will be</p>

No	Item	Function	Description
			<p>automatically turned back to OFF, showing .</p> <p> After the first cut begins, you may still change your selection between  and  before the saw bow has descended to its lowest point.</p>
5		AUTO/Manual mode	<p>Use this button to switch between automatic and manual mode.</p> <ul style="list-style-type: none"> ● AUTO mode (): used to automatically perform continuous cutting jobs. When switched to the AUTO mode, the machine will automatically operate according to the preset parameters. ● Manual mode (): used to perform individual cutting job. When switched to the Manual mode, you can execute each individual function. <p> Trim Cut - When the machine is started up first under the Manual mode and then switched to the AUTO mode, whether the first cut (trim cut) will be counted into finished cuts or not will depend on how the trim cut ON/OFF switch is selected.</p> <p> Switching from AUTO mode to Manual mode during continuous cutting jobs, the machine will stop at the very next time the blade descends to the lowest point (touching lower limit switch).</p> <p>If switching to Manual mode while cutting is in action, the machine will stop when the one cut is finished and the blade has descended to the lowest point. Switching at any time other than cutting such as blade rising or vise retracting, the machine will proceed with the following cutting job until it is finished.</p>
6		Single/Bundle cutting mode	<p>This button is used to switch between single or bundle cutting mode.</p> <ul style="list-style-type: none"> ● Switch to single cutting model () to cut a single work piece. ● Switch to bundle cutting mode () to cut a stack of work pieces. <p> When under bundle cutting mode, the</p>


No	Item	Function	Description
			feeding vise must be touching the front limit switch for the blade to be able to start.
7	 	Slow/Fast material feeding mode	<p>Used only when under Manual mode.</p> <p>When the slow material feeding mode (snail icon) is turned on, the material feeding speed will dramatically reduce to help you position the work piece precisely.</p>
8	 	Automatic first cut function ON/OFF	<p>This selection button works with the automatic cutting mode.</p> <p>When under AUTO mode and before proceeding with your automatic cutting jobs, select  if you wish the machine to automatically execute the first cut of the cutting jobs you programmed in the system. (For cutting program setting, refer to introduction under “Cutting Parameter Setup - Page 3.”)</p> <p>With the first cut function, simply clamp the material with the rear vise with about 60~70 mm sticking out toward the blade, turn on the first cut function and switch to automatic mode, then the machine will automatically feed the material to the right position to execute the first cut, followed by the rest of the programmed cutting jobs.</p> <p>The first cut is also counted into finished cuts.</p> <p>Select  if you do not need to use automatic first cut function.</p> <p> The cutting material width must be OVER 30mm to be able to use automatic first cut properly.</p>
9	Reserved for optional function		
10		Saw bow up indicator	Indicates that the saw blade has risen to the point of touching upper limit switch. When activated, the saw blade icon will turn solid white.
11		Saw blade middle indicator	Indicates that the saw blade has descended to the position of the middle limit switch. When activated, the saw blade icon will turn solid white.

No	Item	Function	Description
			 Due to safety considerations, the shuttle bed feeding/retracting function will be temporarily disabled while the saw blade middle indicator is activated.
12		Saw bow down indicator	<p>Indicates that a cut is completed and the saw bow is at its lowest position.</p> <p>When the blade completes each cut and triggers the lower limit switch, the saw blade icon will turn solid white.</p>
13		Rear vise status indicator	<p>Indicates if the rear vises have clamped and secured the workpiece.</p> <p>When the rear vises have secured the workpiece, the clamping vise icon on the right will turn solid white. Otherwise, the unclamping vise icon on the left will be in solid green.</p>
14		Front vise status indicator	<p>Indicates if the front vises have clamped and secured the workpiece.</p> <p>When the front vises have secured the workpiece, the clamping vise icon on the right will turn solid white. Otherwise, the unclamping vise icon on the left will be in solid green.</p> <p> The front vise must be clamped in order for the blade to be able to start.</p>
15		Feeding movement indicator	When the feeding vise reaches the front limit, the vise set icon will turn solid white.
16	Blade Speed	Blade speed display	Displays current blade speed.
17	Cut rate	Cutting rate display	<p>Displays the current cutting rate.</p> <p> Cutting rate display is available only if the optional saw blade height decoder is equipped on the machine.</p>
18	Length	Feeding length display	Displays current feeding length while the material is being fed.
19	 (yellow highlight)	Error display	<p>Displays error messages in the order of occurrences; press the message to clear the messages.</p> <p> Error messages must be cleared for the</p>

No	Item	Function	Description
			machine to continue to operate normally.
20		System parameter setting	<p>Press this button to set up system parameters. Password is required.</p> <p> All parameters have been set up by the manufacturer. In order to prevent random change from being made to these parameters and affect cutting precision and machine life, this function is protected with a set of password.</p>
21		Cutting program setting	<p>Press this button to directly enter the cutting job program setup page.</p> <p>A total of 100 cutting programs can be set. Refer to Cutting Program Setup in the following page.</p>
22		Cutting parameter setting	<p>Press this button to display cutting-related information e.g. total number of cuts completed and feeding length OR to set parameters e.g. cutting lengths and quantity. (A total of 100 cutting programs can be set.)</p> <p>Blade deviation detector (optional) can be also configured in this setup page.</p> <p>Refer to Cutting Display & Setup in the following page.</p>
23		Material cutting reference	This reference chart lists out the required blade speed and cutting rate for each different material.
24		PLC monitor	Shows current PLC signals.
25		Error report	Lists a historical report of the errors and the time of occurrence as well as provides troubleshooting support. 9 pages in total.



Cutting program setup

When cutting is in operation, press  to quickly access the cutting program setup page.

JOB	Length	Quantity	Cut Finished	JOB 0~99
20	0.0	0	0	Starts JOB <input type="text" value="0"/>
21	0.0	0	0	Ends JOB <input type="text" value="0"/>
22	0.0	0	0	JOB <input type="text" value="0"/>
23	0.0	0	0	Cut Piece Reset
24	0.0	0	0	
25	0.0	0	0	Remaining pieces
26	0.0	0	0	0
27	0.0	0	0	Remaining Time
28	0.0	0	0	0.0
29	0.0	0	0	



Notice:

1. 100 cutting jobs (job 00~99) is the Max Amount for the system to save; more than 100 jobs setting will start to cover the jobs from the first job of the HMI.(EX: If you set-up the 101th job, your first job(job 00) will be rewritten by the 101th job.)

2. The memory can keep 7 days without electric supply.

- In this page you can set your desired cutting length and quantity and see the number of finished cuts (*Cut Finished*) and number of current cutting job in operation
- A total of 100 cutting jobs can be set and performed under the automatic mode.
- In “start job” and the “end job” field, fill in the number of the cutting job you wish to start and end with. The machine will automatically perform cutting jobs within this range.
- In *Length* column, set each respective cutting length in mm or inch.
- In *Quantity* column, set each respective cutting quantity.
- Press button for 3 seconds to reset the cutoff quantity.




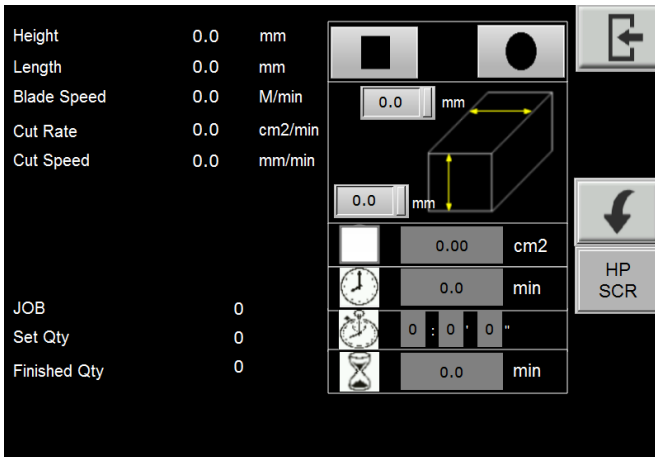
If you start a new set of program without clearing cutoff data from previous job, the first cut (trim cut) will be skipped as the second program is deemed as the succeeding part of the previous program.

- - Reset all preset cutting data within *Start Job* and *End Job* by pressing this button for three seconds.
- Press to return to the main control menu.
- Press , , , to quickly jump between cutting programs (Job 00 ~ 99)



Cutting status display & setup

When cutting is in operation, press  to enter cutting status display and setup page.









Page 1 – cutting status display & setup

- This page shows the following information (from top to bottom):

Left Area

- Blade height
- Feeding length (current feeding vise position)
- Blade speed
- Cut rate
- Cut speed
- JOB**: number of current cutting job/step in operation
- Set Qty**: preset quantity of current cutting job
- Finished Qty**: number of cuts finished

Middle Area

- Press  or  to switch between material shape: rectangle and circle.
- Press  to key in the material size. Without inputting the material size, cut rate can not be calculated by the system.
- Cutting area
- The upper clock shows cycle time per cut.
- The lower clock shows estimated cutting time in hour, minute, and seconds.
- The sandglass shows how much time left to cut.
- Error messages (highlighted in yellow; can be cleared by pressing down for one second)
- Press  to return to the main control menu.
- Press  to go to the next page.
- Press  to go to Horse Power screen page.

As Figure below:



V-Drive Page (Optional)

Tap this button to enter the HP (horsepower) monitor screen for V_Drive, which is an optional accessory for enhancing cutting efficiency and reducing cutting vibrations.

- Press  to return to the main control menu.


Page 2: Cutting program setup




JOB	Length	Quantity	Cut Finished	JOB 0~99
20	0.0	0	0	Starts JOB <input type="text" value="0"/>
21	0.0	0	0	Ends JOB <input type="text" value="0"/>
22	0.0	0	0	JOB <input type="text" value="0"/>
23	0.0	0	0	<input type="button" value="Cut Piece Reset"/> <input type="button" value="All Reset"/>
24	0.0	0	0	
25	0.0	0	0	
26	0.0	0	0	
27	0.0	0	0	
28	0.0	0	0	Remaining pieces <input type="text" value="0"/>
29	0.0	0	0	Remaining Time <input type="text" value="0.0"/>

The same with previously described


Material cutting reference


DIN		Grade of the Material to Be Cut				
1	2	3	4	5	6	7
CK22				CK25		
CK30				CK35		
CK40				CK45		

Solid Material 9-bundled 	Material Size	50	(mm)
	Sectional Area	177	(Cm ²)
	Blade Speed	50~75	(M/ min)
	Cutting Rate	40~68	(Cm ² / min)
	Cutting Time	2.6~4.4	(min)

- This reference chart lists out the required blade speed and cutting rate for each different material.
- Press  to return to the main control menu.
- Press  to go back to the previous page.
- Press  to go to the next page.

PLC Monitor

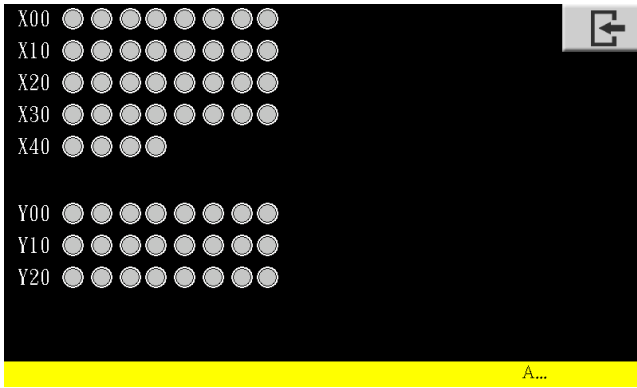




- Shows all signals of the PLC system.
- Press  to return to the main control menu.

Error report





Page 1 – error report

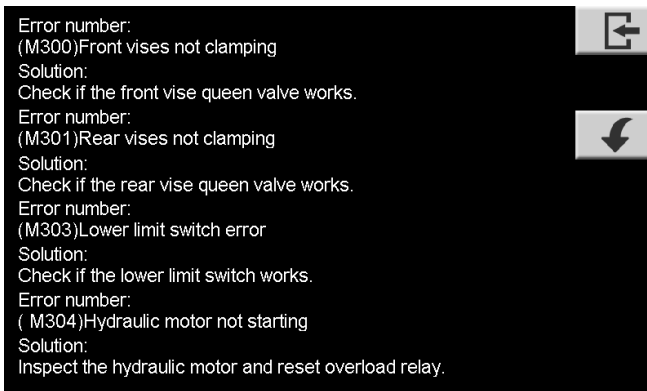- Lists a historical report of the errors and the time of occurrence.
- Press  to return to the main control menu.
- Press  to go to the troubleshooting support page.




Page 2 – troubleshooting



- Provides suggestions on troubleshooting.
- Also refer to the below Table for error codes, descriptions and solutions.
- Press  to return to the main control menu.
- Press  to go to the next page.

Error Code	Error Description	Solution
M300	Front vises not clamping	Check if the queen valve works
M301	Rear vises not clamping	Check if the queen valve works
M303	Lower limit switch error	Check if the lower limit switch works
M304	Hydraulic motor not starting	Check if the hydraulic motor works
M306	Broken blade detected	1. Check if the speed switch works 2. Check if the blade is broken
M308	Left safety door abnormal	1. Check if the left safety door is shut properly 2. Check if the left safety door limit switch works
M309	Right safety door abnormal	1. Check if the right safety door is hut properly 2. Check if the right safety door limit switch works
M312	Quick approach bar abnormal	Check if the quick approach limit switch works
M313	OL1 abnormal	Check if the blade motor overload relay has tripped
M314	OL2 abnormal	Check if the hydraulic motor overload relay has tripped
M315	OL3 abnormal	Check if the coolant pump motor overload relay has tripped
M316	Saw bow upper limit abnormal	Check the upper limit switch works
M350	Insuf length – first cut	Make material 100mm out of vise
M352	Front vise clamping error	1. Place new material 2. Check if the vise queen valve works 3. Check if the “no material parameter” is too low
M357	Saw bow descending error	1. Check if the descend solenoid valve is stuck 2. Check the quick approach bar works 3. Check if the quick approach bar limit switch works
M358	Saw bow ascending error	1. Check if the ascend solenoid valve is stuck 2. Check the quick approach bar works 3. Check the quick approach bar limit switch works
M361	No material	1. Place new material 2. Check if the vise queen valve works 3. Check if the “no material parameter” is too low
M363	PLC battery voltage too low	Replace PLC battery

STANDARD ACCESSORIES

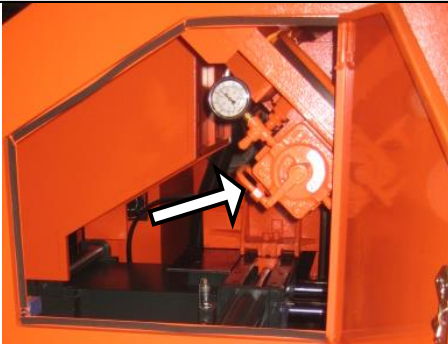Blade tension device




- This blade tension device equipped with hydraulic cylinder provides appropriate tension to the saw blade.
- To tighten the saw blade, turn the selector to .
- Upon saw blade breakage, the safety device will activate and automatically stop all machine operation.
- To change the blade, turn the handle to  to release saw blade tension.




Never adjust blade tension while the blade is running.

Blade speed/motion detector

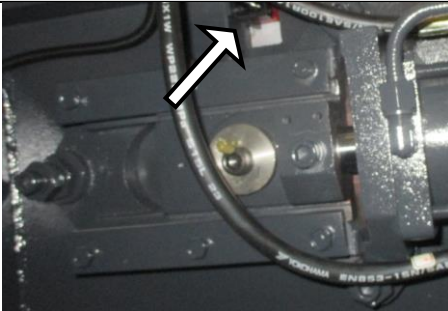

- Besides detecting the blade speed, the speed/motion detector also functions as a safety device.
- The speed/motion detector protects operators and the machine by preventing blade overloads and consequent damages if a saw blade breaks or skids.
- Once blade breakage or slippage is detected, the drive wheel will stop in 10 seconds.

Inverter

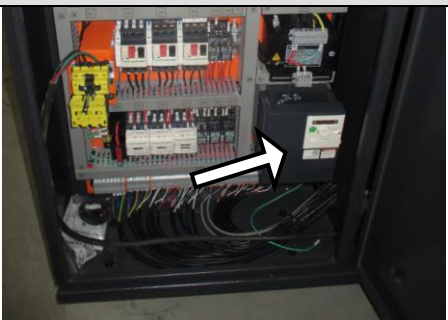


This inverter is installed inside the control box. It is used to control and stabilize the saw blade speed during cutting.

To adjust blade speed, use the *blade speed control* buttons on the HMI touch screen.




1. Make sure the terminal points are connected.
2. Make sure the ambient temperature is within acceptable range and keep the surroundings well ventilated.
3. Keep the inverter away from dust.
4. For repair or maintenance, please contact your local agent.

Quick approach device

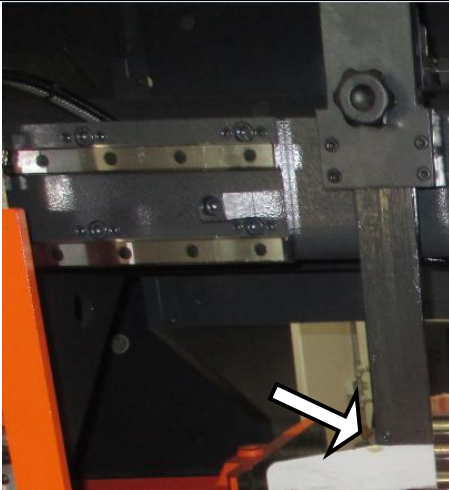


This device is used to allow the saw blade to quickly descend to just above the workpiece. As the quick approach bar touches the material top, the saw bow's descending speed shifts back to cutting mode, which can be changed by adjusting the blade descend speed control knob based on the material to be cut.

Split front vise

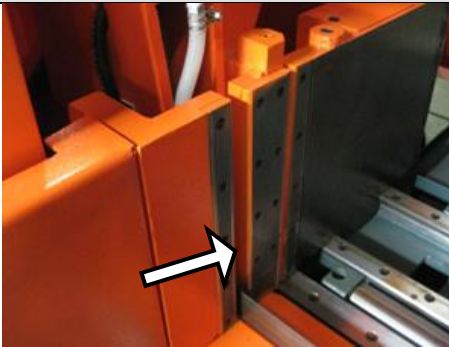

The split vises are a clever design to make sure your workpiece is tightly clamped by the two vises from both sides of the blade, maximizing stability and cutting precision.

Double retracting rear vise

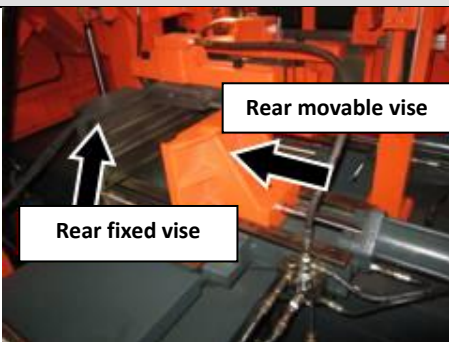

The rear fixed vise has a built-in hydraulic cylinder. When rear vises start actions, the rear fixed vise will always act ahead of the rear movable vise, compensating for crooked and/or misaligned material. In addition, this design reduces the remnant piece.

Gear reducer




The specially designed gear reducer can work toward your preset blade speed and torque.



Please refer to section 6 for information on maintenance.

Wire brush assembly

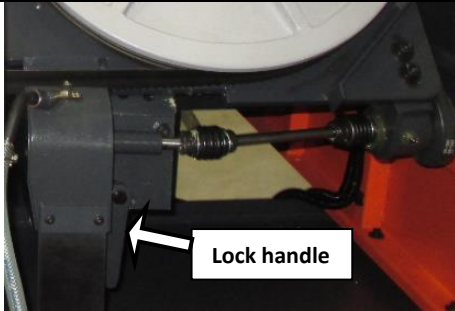

The wire brush is driven by the main motor to remove the metal chips on the saw blade teeth so that blade life can be extended.




Keep hands away from the transmission shaft and the brush while the wire brush is running.



Turn off the hydraulic motor or the main power switch before performing maintenance or cleaning on the wire brush drive system.

Work light

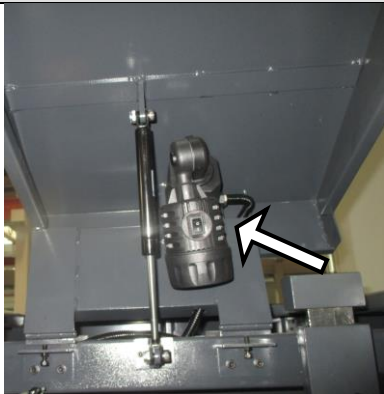

The work light installed on the saw bow is a useful tool when supplementary lighting is needed for material alignment or operation.

Height encoder



With this device, the operator can input work piece width via HMI touch screen. When cutting begins and the blade starts to descend, the panel will display the current blade height, the blade descend speed, and the cutting rate calculated by the system.




The encoder is a precision electronic device. All configurations have been made in the factory before shipment. Please do not make any random change unless instructed directly by the manufacturer.



Avoid impact of any sort to this device.

Length encoder

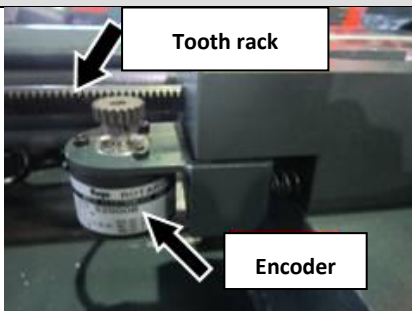

This encoder detects and interprets the feeding length we need.




The encoder is a precision electronic device. All configurations have been made in the factory before shipment. Please do not make any random change unless instructed directly by the manufacturer.



Avoid impact of any sort to this device.

Coolant pump

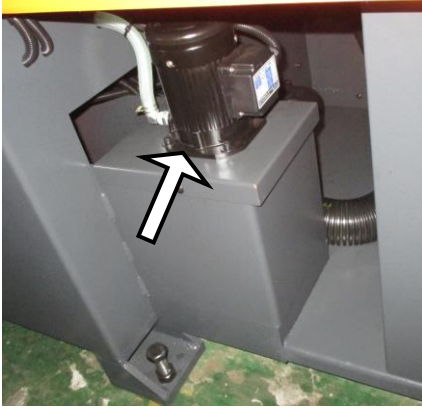

The coolant pump supplies coolant to cool off cutting temperatures during cutting. Also, it can be used to wash off chips.


Automatic saw arm moving device



The movable guide arm moves in sync with the blade. When the material is securely clamped by the vise and ready to cut, start the saw blade and movable guide arm will move toward the movable vise until touching the sync rod. This device can make sure the movable guide arm stop at the most appropriate position based on the size of your workpiece. The sync rod can avoid the direct impact of the movable guide arm and the movable vise.

OPTIONAL ACCESSORIES

Vise pressure regulator

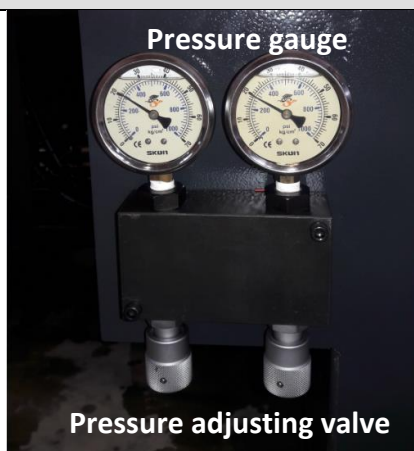

- This adjustment valve is used to control vise pressure.
- Adjust vise pressure based on the material of your workpiece.
- When cutting pipes or soft materials, reduce vise pressure to prevent exerted pressure from damaging the workpiece shape or exterior.




Do not adjust vise pressure at any time during cutting.



Vise pressure should never be lower than 8 kg/cm².

Chip conveyor

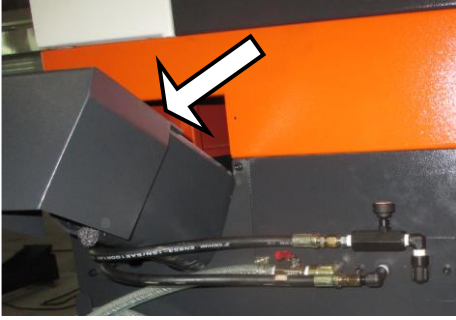


Chip conveyor is a spiral device to bring chips out during cutting.




As a regular maintenance, remove the chip conveyor and clean all chip deposits inside.

Vibration damper

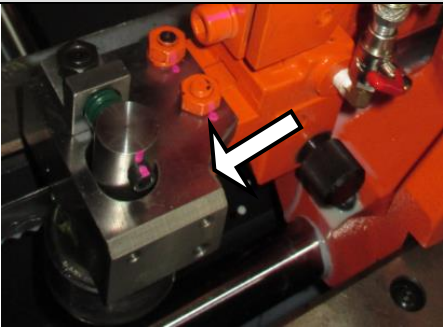

Installed in the left guide arm, the vibration damper reduces blade vibration and high frequency noise when the saw blade is cutting heavy material.

Hydraulic top clamp

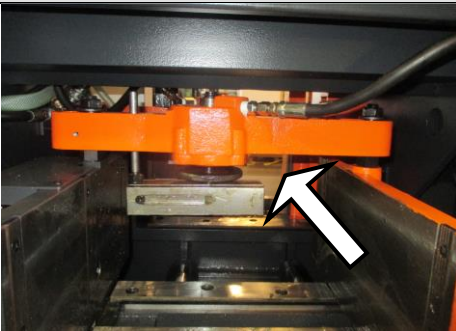

The top clamp is installed on top of the vise before executing bundle cutting.

2M Roller Table



The optional 2M roller table supports the work material and ensures the material is fed in smoothly.



Please refer to section 7 for instructions on adjusting roller tables.

Blade Deviation Detector & Calibration Procedure (Optional)



Blade Deviation Detector

This device detects blade deviation. If the blade deviates out of the tolerance range, the machine will stop automatically.

※ [Remark] When this device is installed, the cutting width will be reduced.

The blade deviation detected value and present values are displayed on the HMI screen.

Before cutting, please make sure if the deviation value is "Zero". If not, please calibrate the deviation detector before proceeding to cutting.

***Deviation Tolerance (Recommended):**

$\pm 0.1 \sim 0.5 \text{ mm } (\pm 0.004'' \sim 0.02'')$ 。


***Set up according to the tolerance range the users need.**

How to Adjust

1. Loosen the nuts.
2. Adjust the proximity sensor until the blade deviation value shown the display returns to zero. (Please refer to the next page.)
3. Tighten the nuts.

How to Check

Put a thick ruler (0.1mm) between saw blade and deviation roller for measurement. Also, check the deviation tilt value; it should be 0.1mm.

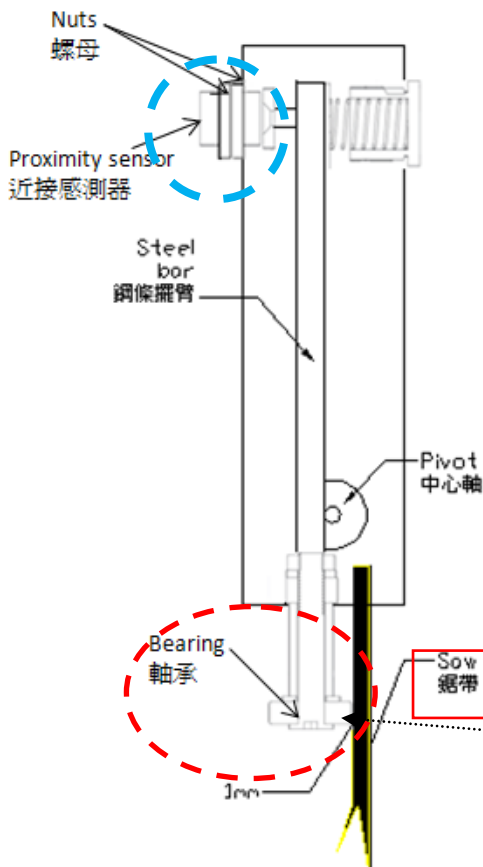

Deviation Dectector Side Section

- Adjust the proximity sensor until the blade deviation displayed on the control panel is zero.
- If the deviation value not changed when adjusting the proximity sensor or **bearing**, it means the deviation detector with malfunction. Need to replace a new one.
- Please clean the internal shell of deviation detector sometimes for keeping dry and clean.




Picture B : Deviation Value Display

- Make the proximity sensor connect with power & adjust the proximity sensor until the blade deviation displayed on the control panel is 0 mm °

Deviation Tolerance (Recommended):

±0.1~0.5 mm (±0.004"~0.02 ") °

*** Set up according to the tolerance range the users need.**

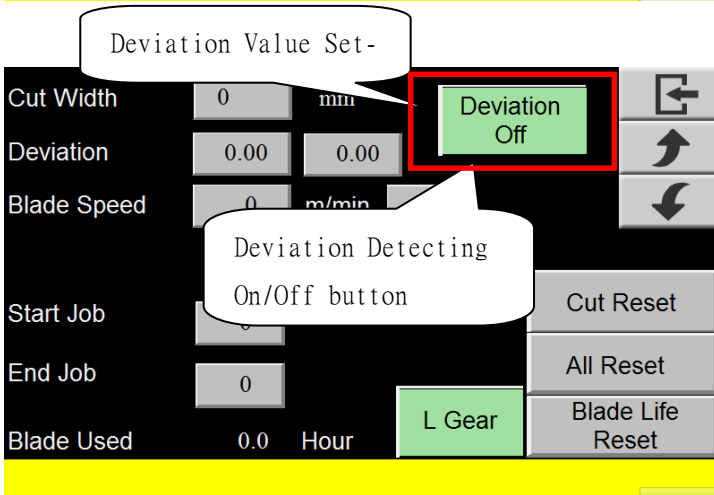

Picture C:

Deviation Value Set-Up & On/Off button

- Deviation Value Set-Up:
 - Set up the tolerance of deviation value; if the value out of range when blading for 15 seconds, the machine will be automatically full stopped with alarm message.
- Deviation Detecting On/Off button:
 - Turn On/Off the deviation detecting function.

[NOTE]

The information shown on HMI display: The format of HMI interface will be different from the difference of model and software design.


UNROLLING & INSTALLING THE BLADE



Always wear leather gloves and protection glasses when handling a blade.

Unrolling the blade

Please follow the procedures illustrated below.

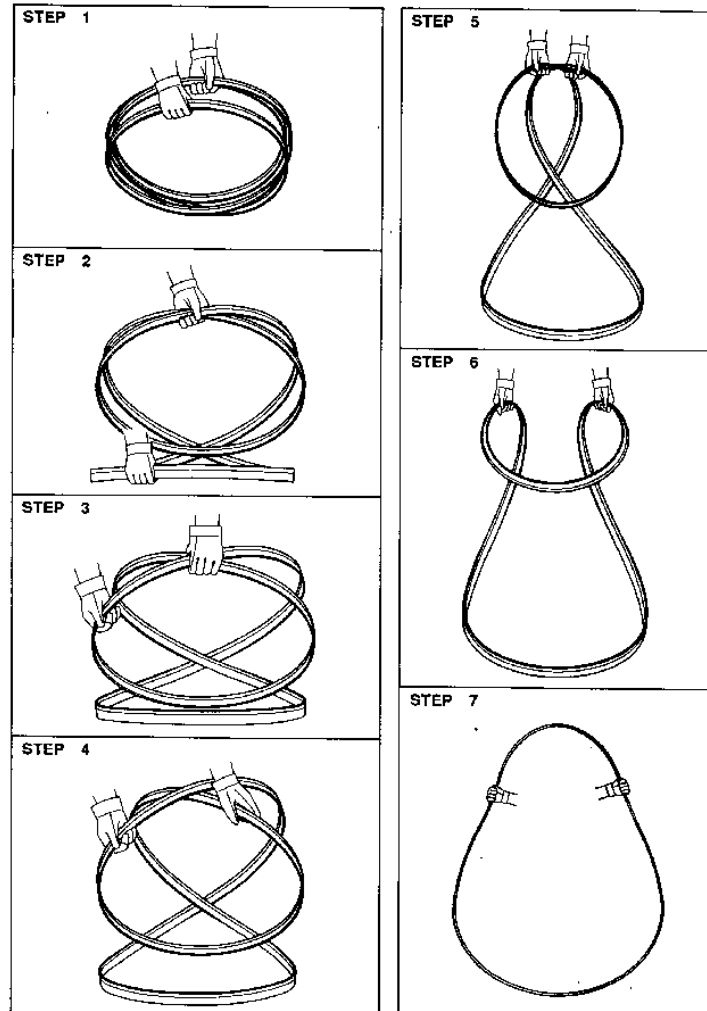

Unroll and roll the blade


Installing a new blade





Before changing the blade, make note of the direction the blade is running and the blade teeth is facing.

Step 1 - Select the most suitable saw blade for your workpiece considering the size, shape and material.

Step 2 - Turn on the machine power by switching to *ON* and turn on the hydraulic system.

Step 3 - Switch to *manual* () mode.

Step 4 - Press the *saw bow up* button and elevate the saw bow until there is enough room for blade changing.

Step 5 - Open the left side cover. Turn the tension controller handle from “” to “” position to release tension. The idle wheel will then move slightly toward the direction of the drive wheel.




Step 6 - Open the idle and drive wheel covers.

Step 7 - Press the *Blade Clip* device to hold onto the blade. This device makes blade changing easy and feasible even with only one operator available.




Easy Blade Replacement Device

Step 8 - Loosen the left and right carbide inserts by loosening the “lock nut” shown below.

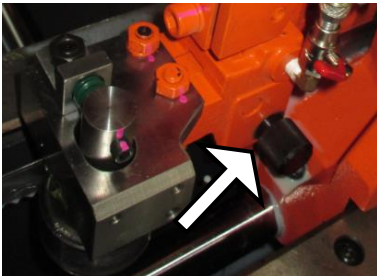

Step 9 - Loosen the wire brush lock handle and move the wire brush away from the blade.

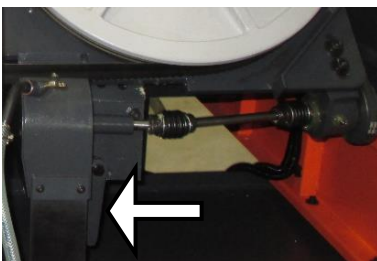

Step 10 - Pull down the worn saw blade from the carbide inserts, wire brush assembly and from the two wheels. Roll up the used blade and place it at a safe place.

Step 11 - If necessary, clean the blade guide rollers before installing a new saw blade.

Step 12 - Place the new blade around the idle wheel and the drive wheel.


Step 13 - Insert the blade into the left and right tungsten carbide inserts. The back and the sides of the blade need to be touching the inserts as well as the adjacent rollers.

Step 14 - Place the blade to the drive wheel and press the back of the blade against the flange of the drive wheel. Use the *Blade Clip* device to tightly hold the blade from falling out of the drive wheel.



When saw blade begins to rotate, the blade holder will automatically release the blade and fall back to its original position.

Step 15 - Make sure the back of the blade is also pressed against the flange of the idle wheel.

Step 16 - Turn the tension controller handle to [] position to obtain blade tension.

Step 17 - Make sure the sides of the blade are in close contact with the carbide inserts and then tighten the left and right carbide inserts by tightening the “lock nut”.

Step 18 - Gently close the idle and drive wheel covers.

Step 19 - Press the *saw blade start* button to start the blade. Allow the blade to run for a few rotations then press the *saw bow up* button to elevate the saw bow. Open the wheel covers and make sure the blade has not fallen off the drive and idle wheels. If the blade has shifted, follow the same procedure to reinstall the blade again.

Step 20 - Adjust wire brush to a proper position. Refer to *Adjusting Wire Brush* in this section.



ADJUSTING WIRE BRUSH

Follow these steps to adjust wire brush to appropriate position:

Step 1 – Loosen the wire brush adjusting handle.

Step 2 – Make brush move up/down until it makes proper contact with the saw blade (also see below illustration).

Step 3 – Tighten the wire brush adjusting handle.

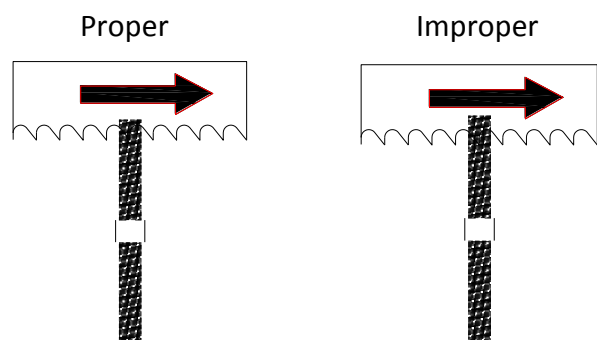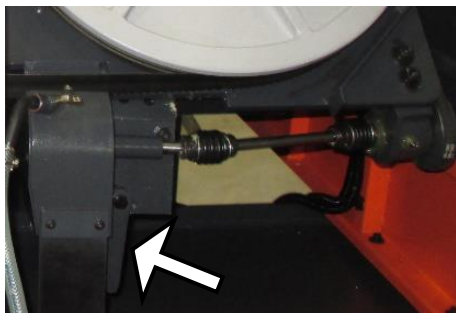

ADJUSTING COOLANT FLOW

A total of four coolant flow control valves are in place to provide lubrication, cooling and cleaning for this machine. These valves control coolant flow amount to:

- the left blade guide,
- the right blade guide
- the coolant nozzle and,
- to the wire brush


To adjust the coolant flow, follow these steps:

Step 1 – Press the coolant ON button to start the coolant pump.


Step 2 – Use the coolant flow control valves (shown below) to adjust the amount of fluid flowing to the cutting area.



(For left blade guide)

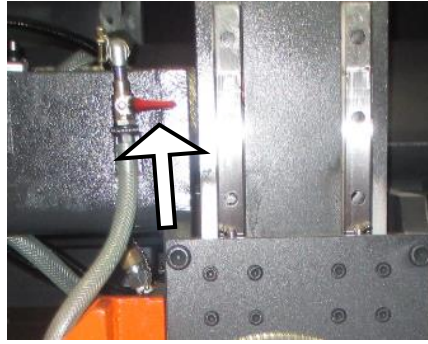


(For right blade guide)




(For coolant nozzle & wire brush)



Adjust the flow amount if you observe the following changes to the chips generated from cutting.



If the chips are sharp and curved, increase the coolant flow amount.



If the chips are granulated, decrease the coolant flow amount.

PLACING WORKPIECE ONTO WORKBED

Step 1 – Press the *saw bow up* button and elevate the saw bow until it reaches to its highest point.

Step 2 – Turn the *front vise and rear vise selector switches* to open vises.

Step 3 – Loosen the vertical roller lock handles and fully open the vertical rollers.


Step 4 – Carefully place the workpiece onto the work feed table to where it extends approximately **70~100 mm (2.75"~3.9")** beyond the rear vise toward the front vise.



POSITIONING WORKPIECE FOR CUTTING

A. Without using AUTOMATIC FIRST CUT FUNCTION

Follow these steps to position your workpiece:

Step	Action
rear vises clamp material	1 After the workpiece has been properly placed on the workbed, turn the <i>rear vise selector switch</i> to the right until the workpiece is securely clamped.
align vertical rollers	2 Move the vertical alignment rollers toward workpiece until it stands against the workpiece. Lock the vertical alignment rollers by tightening the lock handles.
feed material forward	3 Turn the <i>feed selector switch</i> to the lower left until the rear vise touches the front limit switch.
front vises clamp material	4 Turn the <i>front vise selector switch</i> to the right until the workpiece is securely clamped.
rear vises retract to clamp material again	5 Turn the <i>rear vise selector switch</i> to the left to open.
	6 Turn the <i>feed selector switch</i> to the upper left until the rear vise reaches rear limit switch.
	7 Turn the <i>rear vise selector switch</i> to the right until the workpiece is securely clamped again.
front vises open; prepare for precision position	8 Simultaneously turn the <i>front vise selector switch</i> to the left and turn the <i>rear vise selector switch</i> to the right again to make sure the material is clamped.
confirm cutoff point	9 Press the <i>saw bow down</i> button to lower the saw bow until the quick approach bar descends to just about 10mm (0.4 inch) above the workpiece.  Under no circumstances should the quick approach bar be lowered below the height of the workpiece.
precision position	10 Turn the <i>feed selector switch</i> until the cutoff point on the workpiece aligns with the blade line.
front vises clamp material; ready to cut	11 After the workpiece is correctly positioned, turn the <i>front vise selector switch to the right</i> so the workpiece is securely clamped. Now the material is ready for a manual cutting job or making a trim-cut before proceeding to automatic cutting.

B. Using AUTOMATIC FIRST CUT FUNCTION



The cutting material width must be OVER 30mm to be able to use automatic first cut properly.

Follow these steps to position your workpiece and get it ready for an automatic cutting job using the automatic first cut function.

Step	Action
rear vises clamp material	1 After the workpiece has been properly placed on the workbed (with about 70-100 mm sticking out past the rear vises toward the front vises, leaving enough room before the front vises), turn the <i>rear vise selector switch</i> to the right until the workpiece is securely clamped.
align vertical rollers	2 Move the vertical alignment rollers toward workpiece until it stands against the workpiece. Lock the vertical alignment rollers by tightening the lock handles.
close front vises	3 Turn the <i>front vise selector switch</i> to the right until the front vises are clamped together.
program cutting jobs	4 Via the HMI touch screen, making the following settings: <ul style="list-style-type: none">• Set your desired length and quantity for the first step of your cutting job. If you wish to apply the first cut as trim-cut, however, set quantity to 1 and remember to turn on <i>trim-cut</i> function (+0) so it will not be counted into finished cuts.• Program the rest of your cutting jobs if any. Remember to set your starting step and ending step accordingly.
turn on automatic first cut function	5 Via the HMI touch screen, turn on the <i>automatic first cut</i> function and switch to <i>automatic cutting mode</i> .
ready to cut and start	6 Now the material is ready for automatic cutting. Press the <i>blade start</i> button to start cutting. The following actions will take place: <ul style="list-style-type: none">• The saw bow rises to the upper limit position;• the rear vises start feeding material forward until the front end of the workpiece touches the front vise detector block, triggering the feeding motion to stop;• the rear vises retract slightly;• the front vises start to open;• the rear vises feed the material to the exact cutoff position;• the front vises close back up;• the blade start running and saw bow descend while the movable guide arm automatically moves to the closest position possible.

ADJUSTING BLADE SPEED

Step 1 – Set the flow control to “0” position.

Step 2 – Press the *saw blade start* button to start the blade.

Step 3 – Via HMI touch screen, you can set the blade speed by directly keying in the value or use the acceleration/deceleration button to adjust the speed. The blade speed should be adjusted based on the size and the material of the workpiece.

BREAKING-IN THE BLADE

When a new saw blade is used, be sure to first break in the blade before using it for actual, extended operation. Failure to break in the blade will result in less than optimum efficiency. To perform this break-in operation, the following instructions should be followed:

Step 1 - Reduce the blade speed to one-half of its normal setting.

Step 2 - Lengthen the cutting time to 2-3 times of what is normally required.

Step 3 - Start the break-in operation.

Step 4 - After the break-in operation is completed, set all parameters back to normal settings.

TEST-RUNNING THE MACHINE

Test-running this machine can ensure good machine performance in the future. We suggest you run the following tests on the machine before first use:

Testing machine performance:

Turn on the power and run a basic performance test after you finish installing the machine. Follow these steps to test machine performance:

Step 1 – Disassemble shipping brackets and bolts.

Step 2 – Install roller table (optional).

Step 3 – Turn on the relay switch in the control box.

Step 4 – Elevate the saw bow. (If your coolant pump is in reverse and the machine cannot run, please change the electrical phase.)

Step 5 – After the saw bow ascends, extend the quick approach device.

Step 6 – Remove the rust-prevention grease with cleaning oil or kerosene.

Step 7 – Start the coolant pump.

Step 8 – Test these functions under manual mode:

- vise clamping/unclamping
- saw bow ascending/descending
- feeding forward and backward.

CUTTING OPERATION

Step 1 – Check before you cut

- **Power:** Check the voltage and frequency of your power source.
- **Coolant:** Check if you have sufficient coolant in the tank.
- **Hydraulic:** Check if you have sufficient (at least two-thirds or higher) hydraulic oil.
- **Workbed:** Check if there is any object on the feeding bed that may cause interference.
- **Blade:** Check the blade teeth and make sure there is no worn out teeth along the blade.
- **Light:** Check the work lamp or laser light (optional) and make sure there is sufficient lighting.
- **Roller:** Check all the rollers on the front and rear workbed can roll smoothly.
- **Saw bow:** Check the saw bow to see if it can be elevated and lowered smoothly

Step 2 – Place your workpiece onto the workbed manually or by using a lifting tool e.g. a crane. Refer above *Placing Workpiece onto Workbed*.



Before loading, make sure the vises are opened wide enough and the blade is raised high enough to allow enough clearance for the workpiece. When loading, take extra care not to have the workpiece bump into the blade.

Step 3 – Position your workpiece. Decide to use the *automatic first cut function* or not. With the automatic first cut function, the machine can automatically detect material front end and feed it exactly to where it needs to be for your programmed jobs. Refer above *Positioning Workpiece for Cutting*.



The cutting material width must be OVER 30mm to be able to use automatic first cut properly.

Step 4 – Clamp the workpiece.

Step 5 – Turn the *cutting pressure control* knob to adjust blade cutting pressure according to the material.

Step 6 – Adjust *blade descend speed control* knob to obtain a suitable blade descend speed for your material.

Step 7 – Start running the blade.



Before you start cutting, check again that there is no other object in the cutting area.

Step 8 – While the blade descends, adjust the blade speed if necessary. You can do so by pressing the acceleration and deceleration buttons on the HMI touch screen. The blade speed is displayed on the HMI touch screen.

Step 9 – Select the proper cutting condition according to different material.

Step 10 – After the entire cutting job is completed, elevate the saw bow to the top and open the vises to remove the workpiece.

Step 11 – Clean the workbed by removing chips and cutting fluids.

Step 12 – Lower the saw bow to a proper position then turn off the power.

USING TOP CLAMP FOR BUNDLE CUTTING



Before Cutting , Make sure that the bundle is properly tightly clamped but not being distorted by clamp force.

Any improper bundle cutting can cause damage to the blade, reduce the blade life.


Notice: There are several factors to makes bundle cutting more difficult and unstable, such as vibration, wide guide spacing, coolant getting to the teeth and cutting through work hardened chips.

1. Each bar of the bundle is suggested to be the same size for being firmly clamped in the bundle.
2. Make sure that the bundle is properly placed (before cutting) to refrain from vibration, spinning and changing length position during cutting.
3. Tack welding ends of bars will prevent spinning but not vibration.

Installing top clamp

To perform bundle cutting, use the top clamps and take the following installation procedures.

Step 1 – Install stud bolts on the front and rear vises and position the top clamp.

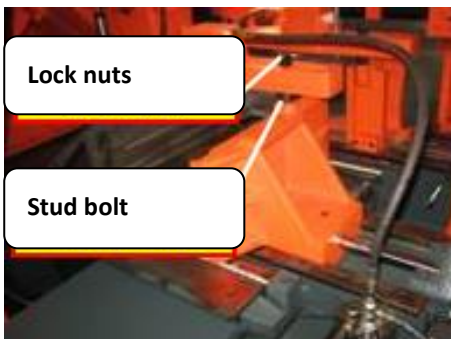

Step 2 – Connect the top clamp hoses to the pressure joints on the vise hydraulic cylinders.




Step 3 – Position the workpiece for bundle cutting.



Note the allowable clamping width and height. (Refer to *Section 2 General Information - Specifications*)

Proper and improper stacking of workpieces

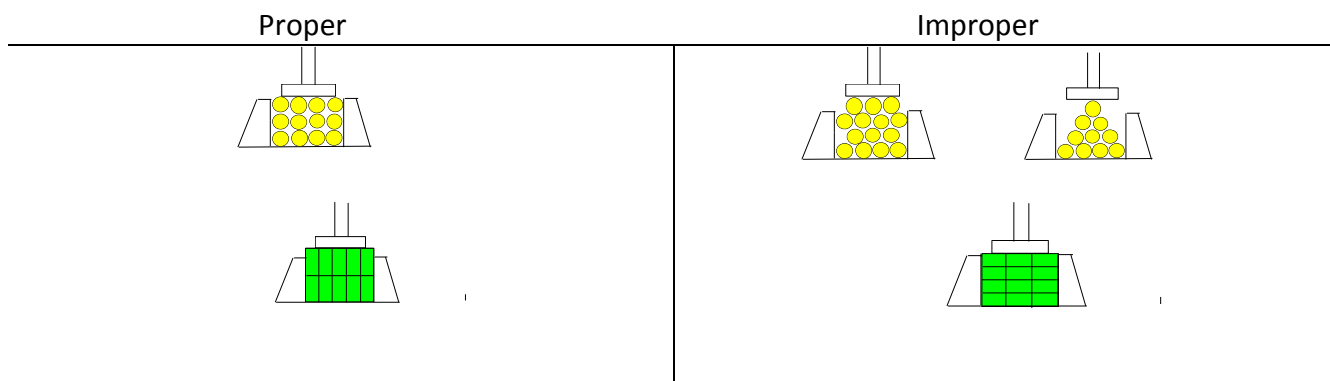

Step 4 – Align the top clamp cylinders with the center of the workpiece and tighten the lock nuts.

Step 5 – Turn the top clamp handles so that the clearance between the top clamp jaw and the top of the bundled workpiece is within 5 to 10 mm (0.2 ~ 0.4 in).

Step 6 – Press *Single/Bundle cutting mode* button and switch to bundle cutting mode.

Step 7 – For subsequent cutting procedures, refer to the cutting instructions above.

Uninstalling top clamp

Follow these steps to uninstall top clamp for cutting single material:

Step 1 – Disconnect the top clamp hoses.

Step 2 – Loosen the lock nuts and remove the top clamp.

Step 3 – Remove the stud bolts.



TERMINATING A CUTTING OPERATION

- To terminate a cutting operation, press either the *saw bow up* button or the *emergency stop* button.
- The saw blade will stop running when the *saw bow up* button is pressed.
- Both the saw blade and hydraulic pump motors will stop running when the *emergency stop* button is pressed.
- The machine will stop automatically when an error occurs. The error message will be shown on the screen.

BANDSAW CUTTING: A PRACTICAL GUIDE


INTRODUCTION

SAW BLADE SELECTION

WISE LOADING

BLADE BREAK-IN

INTRODUCTION

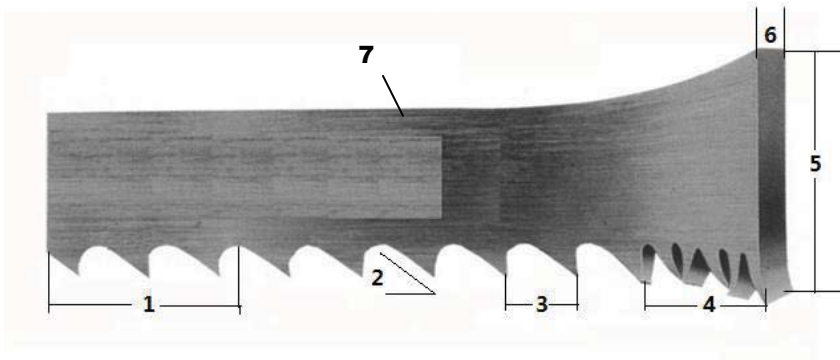

- 1. TPI:** The number of teeth per inch as measured from gullet to gullet.
- 2. Tooth Rake Angle:** The angle of the tooth face measured with respect to a line perpendicular to the cutting direction of the saw.
- 3. Tooth Pitch:** Tooth pitch refers to the number of teeth per inch (tpi). 1 inch equates to 25.4 mm.


A distinction is made between constant tooth pitches with a uniform tooth distance, 2 tpi for example, and variable tooth pitches with different tooth distances within one toothing interval.

Variable tooth pitches, for instance 2-3 tpi, can be characterized by two measures: 2 tpi stands for the maximum tooth distance and 3 tpi stands for the minimum tooth distance in the toothing interval.

Constant



Variable

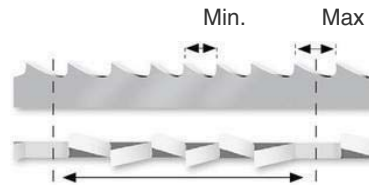

- 4. Set:** The bending of teeth to right or left to allow clearance of the back of the blade through the cut.
- 5. Width:** The nominal dimension of a saw blade as measured from the tip of the tooth to the back of the band.
- 6. Thickness:** The dimension from side to side on the blade.
- 7. Gullet:** The curved area at the base of the tooth. The tooth tip to the bottom of the gullet is the gullet depth.

SAW BLADE SELECTION

1. Band length

The dimensions of the band will depend on the band saw machine that has been installed.

Please refer to Section 2 – General Information

2. Band width

Band width: the wider the band saw blade, the more stability it will have.

3. Cutting edge material

The machinability of the material to be cut determines what cutting material you should choose.

4. Tooth pitch

The main factor here is the contact length of the blade in the workpiece.

If it is 4P, $25.4 \div 4 P = 6.35$ mm, that is, one tooth is 6.35 mm.

If it is 3P, $25.4 \div 3 P = 8.46$ mm If the number is small, it means that the tooth is large.

What is written as 3/4 is that it is a variable pitch of large (3) / small (4).

The saw blade must contact the cutting material at least two pitches. In the case of a thickness of 15 mm, 4P = OK, 3P = NG.

- The surface conditions will also affect the cutting rate. If there are places on the surface on the material which are hard, a slower blade speed will be required or blade damage may result.
- It will be slower to cut tubing than to cut solids, because the blade must enter the material twice, and because coolant will not follow the blade as well.
- Tough or abrasive materials are much harder to cut than their machinability rating would indicate.
- Tooth spacing is determined by the hardness of the material and its thickness in cross section.
- Tooth set prevents the blade from binding in the cut. It may be either a "regular set" (also called a "raker set") or a "wavy set".
- The regular or raker set is most common and consists of a pattern of one tooth to the left, one tooth to the right, and one which is straight, or unset. This type of set is generally used where the material to be cut is uniform in size and for contour cutting.
- Wavy set has groups of teeth set alternately to right and left, forming a wave-like pattern. This reduces the stress on each individual tooth, making it suitable for cutting thin material or a variety of materials where blade changing is impractical. Wavy set is often used where tooth breakage is a problem. This is shown in Fig. 7.2 as follows:


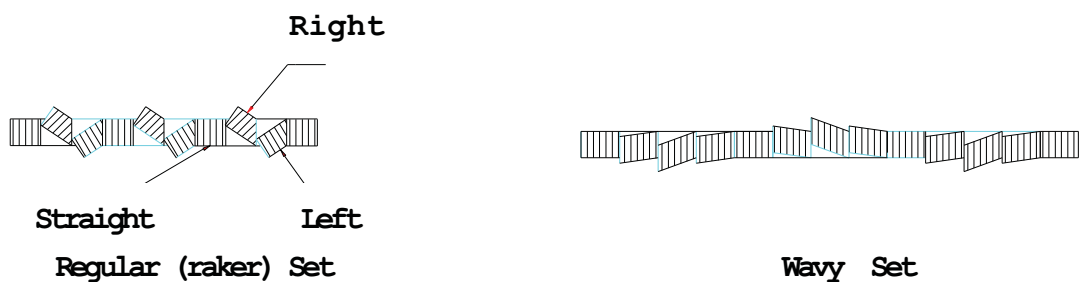


Fig. 7.2 The Saw Set

WISE LOADING

The position in which material is placed in the vise can have a significant impact on the cost per cut.

Often, loading smaller bundles can mean greater sawing efficiency.




When it comes to cutting odd-shaped material, such as angles, I-beams, channel, and tubing, the main point is to arrange the materials in such a way that the blade cuts through as uniform a width as possible throughout the entire distance of cut.

The following diagrams suggest some costeffective ways of loading and fixturing. Be sure, regardless of the arrangement selected, that the work can be firmly secured to avoid damage to the machine or injury to the operator.



BladeBreak -In

Completing a proper break-in on a new band saw blade will dramatically increase its life.

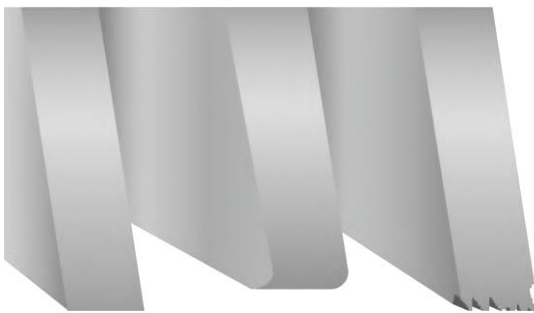

New
Blade

With
Blade-in

Without
Blade-in

1. **Select the proper band speed** for the material to be cut.
2. **Reduce the feed force/rate** to achieve a cutting rate 20% to 50% of normal (soft materials require a larger feed rate reduction than harder materials).
3. **Begin the first cut at the reduced rate.** Make sure the teeth are forming a chip. Small adjustments to the band speed may be made in the event of excessive noise/vibration. During the first cut, **increase feed rate/force** slightly once the blade fully enters the workpiece. With each following cut, **gradually increase feed rate/force** until normal cutting rate is reached.

MAINTENANCE & SERVICE

INTRODUCTION

BASIC MAINTENANCE

MAINTENANCE SCHEDULE

BEFORE BEGINNING A DAY'S WORK

AFTER ENDING A DAY'S WORK

Every 2 weeks

First 600hrs for new machine, then every 1200hrs **for routine change**

EVERY SIX MONTHS

STORAGE CONDITIONS

TERMINATING THE USE OF MACHINE

OIL RECOMMENDATION FOR MAINTENANCE

INTRODUCTION

For the best performance and longer life of the band saw machine, a maintenance schedule is necessary. Some of the daily maintenance usually takes just a little time but will give remarkable results for the efficient and proper operation of cutting.

BASIC MAINTENANCE

It is always easy and takes just a little effort to do the basic maintenance. But it always turns out to be a very essential process to assure the long life and efficient operation of the machine. Most of the basic maintenance requires the operator to perform it regularly.

MAINTENANCE SCHEDULE

We suggest you do the maintenance on schedule.

Before beginning a day's work

1. Please check the hydraulic oil level. If oil level volume is below 1/2, please add oil as necessary. (Filling up to 2/3 level is better for system operation.)
2. Please check the cutting fluid level, adding fluid as necessary. If the fluid appears contaminated or deteriorated, drain and replace it.
3. Please check the saw blade to ensure that it is properly positioned on both the drive and idle wheels.
4. Please make sure that the saw blade is properly clamped by the left and right inserts.
5. Please check the wire brush for proper contact with the saw blade. Replace the wire brush if it is worn out.

After ending a day's work

Please remove saw chips and clean the machine with discharging the cutting fluid when work has been completed.



Do not discharge cutting fluid while the saw blade is operating because it will cause severe injury on operator's hand.



Be sure the saw blade is fully stop, it will be performed after working inspection.

Every 2 weeks

Please apply Grease to the following points:

1. Idle wheel
2. Drive wheel
3. Blade tension device

Recommended Grease:



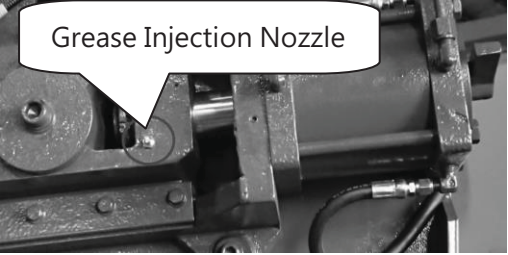

- Shell Alvania EP Grease 2
- Mobil Mobilplex 48

Please apply lubricating oil to the following points: (if applicable)
Main shaft (double column)



Recommended Lubricating Oil:

- CPC Circulation oil R68

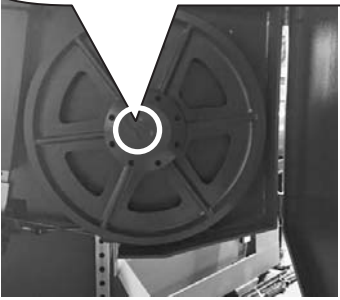


Grease Injection Hole:

	<ol style="list-style-type: none"> 1. Grease Injection Nozzles at the middle of drive wheel and idle wheel; (You need to rotate the wheel until you see the Grease injection nozzle.)  : The position of injection indicating. <ol style="list-style-type: none"> 2. Please inject the grease into the Nozzle.
	<ol style="list-style-type: none"> 1. Grease Injection Nozzle on the blade tension device.  : The position of injection indicating. <ol style="list-style-type: none"> 3. Please inject the grease into the Nozzle.

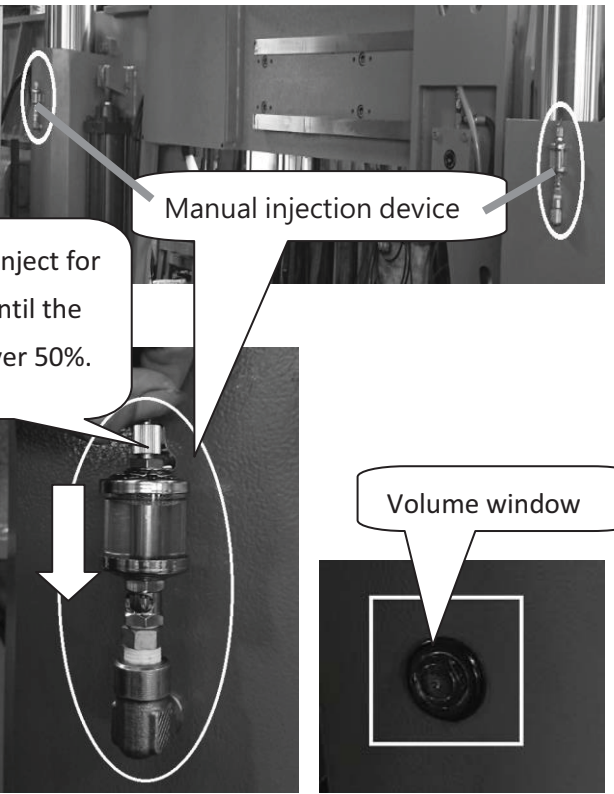Lubricating Oil Injection for Main shaft (double column) (if applicable):

	<ol style="list-style-type: none"> 1. Two manual injection device for two main shafts (double column)  : The position of injection indicating. <ol style="list-style-type: none"> 2. Pull up & inject lubricating oil for seconds 3. Recommend always keeping the volume over 50% inside the vessel of volume window. °
---	---

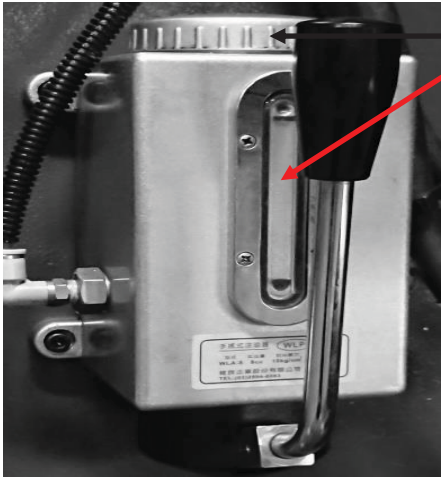Manual Lubrication Injection Device: (if applicable)

	<p>Lubrication volume indicator. Recommend keeping the volume over 50% inside the vessel.</p>
	<p> Please take down this vessel cap to replenish the lubrication.</p> <p>For the prevention of working environment pollution, DO NOT replenish too much volume of lubrication while supplying the lubrication into the vessel.</p> <p>Under the circumstances of normal operation, replenish the lubrication once every three days.</p> <p>It may be adjusted the schedule of replenishing whenever the user needs.</p> <p>The main function is to lubricate the slide rail and block. (The liner guideway for saw bow).</p>

First 600hrs for new machine, then every 1200hrs **for routine change**

Replace the transmission oil after operating for first 600hrs for new machine, then every 1200hrs

Recommended gear oil

- Shell Omala oil HD220
- Mobil gear 630

Recommended hydraulic oil

- ShellTellus 32
- Mobil DTE Oil Light Hydraulic 24

Every six months

1. Clean the filter of the cutting fluid.
2. Replace the transmission oil for every half of a year (or 1200 hours).
Check the sight gauge to ascertain the transmission level.

Recommended TRANSMISSION OIL



- Omala oil HD220
- Mobil comp 632 600W Cylinder oil

3. Replace the hydraulic oil.


Recommended HYDRAULIC OIL

- ShellTellus 32
- Mobil DTE Oil Light Hydraulic 24

Gear Oil & Grease Injection Hole:

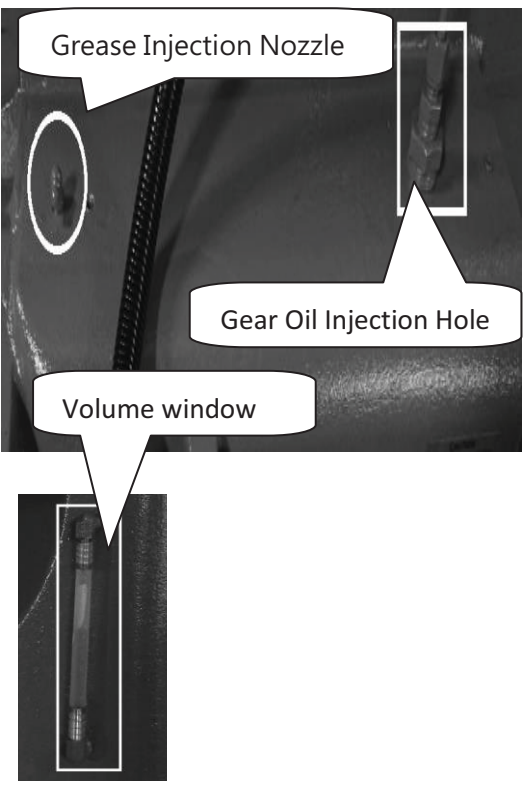	<ol style="list-style-type: none">1. A grease injection hole and a gear oil injection hole on the top of gear reducer.  <p>: The position of injection indicating.</p> <ol style="list-style-type: none">2. Recommend keeping the volume over 50% inside the vessel of volume window. °
---	--

To unload the waste fluid:

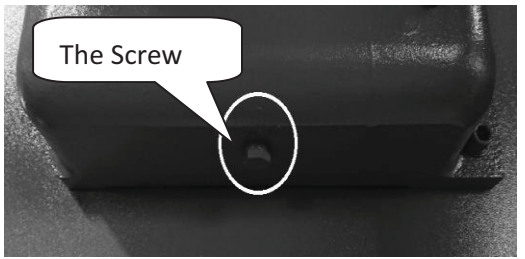 <p><u>Bottom of Gear reducer</u></p>	<ol style="list-style-type: none">1. Put the waste oil container in the bottom of the reducer for unloading waste fluid2. Use the wrench to open the screw for unloading the waste fluid.3. Make sure the screw bolted tightly after unloading completed,
--	---

STORAGE CONDITIONS

Generally, this machine will be stored on the following conditions in future:

- (1) Turn off the power.
- (2) Ambient temperature: 5°C ~ 40°C
- (3) Relative humidity: 30%~85% (without condensation)
- (4) Atmosphere: use a plastic canvas to cover machine to avoid excessive dust, acid fume, corrosive gases and salt.
- (5) Avoid exposing to direct sunlight or heat rays which can change the environmental temperature.
- (6) Avoid exposing to abnormal vibration.
- (7) Must be connected to earth.

TERMINATING THE USE OF THE MACHINE

Waste disposal:

When your machine can not work anymore, you should **drain** the oil from machine body. Please **store** the oil in safe place with bottom **tray**. Ask a environment specialist to handle the oil. It can avoid soil pollution. The oil list in machine:

- Hydraulic oil
- Cutting fluid
- Drive wheel gear oil

OIL RECOMMENDATION FOR MAINTENANCE

Item	Method	Revolution	Suggest oil
Dovetail guide	Keep grease covered. Antirust.	Daily	Shell R2
Roller bearing	Sweep clean and oil with lubricant.	Daily	SEA #10
Bed roller / surface	Sweep clean and oil with lubricant.	Daily	SEA #10
Nipples of bearing	Use grease gun, but not excess.	Monthly	Shell R2
Blade tension device	Use grease gun, but not excess.	Monthly	Shell Alvania EP Grease 2, Mobil Mobilplex 48
Reducer	Inspect once a week. Change oil of 600 hours of using. Change it every year.	Regularly	Omala oil HD220 Mobil Gear 630
Hydraulic system	Inspect half a year. Change oil every year.	Regularly	Shell Tellus 32 Mobil DTE oil Light Hydraulic 24
Bearing	Inserts	Oil with lubricant, but not excess.	Daily
	Band wheel	Oil with lubricant, but not excess.	Weekly
	Cylinder	Oil with lubricant, but not excess.	6 Monthly
	Wire brush	Oil with lubricant, but not excess.	6 Monthly



- 1. Turn off the stop circuit breaker switch before servicing the machine.**
- 2. Then post a sign to inform people that the machine is under maintenance.**
- 3. Drain all of the cutting fluid and oil off and carefully treat them to avoid pollution.**
- 4. The machine must be either LOCKED OUT OR TAGGED OUT while under maintenance.**

TROUBLESHOOTING

INTRODUCTION

PRECAUTIONS

GENERAL TROUBLES & SOLUTIONS

MINOR TROUBLES & SOLUTIONS

MOTOR TROUBLES & SOLUTIONS

BLADE TROUBLES & SOLUTIONS

SAWING PROBLEMS & SOLUTIONS

RE-ADJUSTING THE ROLLER TABLE

INTRODUCTION

All the machines manufactured by COSEN pass a 72 hours continuously running test before shipping out and COSEN is responsible for the after sales service problems during the warranty period if the machines are used normally. However, there still exist the some unpredictable problems which may disable the machine from operating.

Generally speaking, the system troubles in this machine model can be classified into three types, namely GENERAL TROUBLES, MOTOR TROUBLES and BLADE TROUBLES. Although you may have other troubles which can not be recognized in advance, such as malfunctions due to the limited life-span of mechanical, electric or hydraulic parts of the machine.

COSEN has accumulated enough experiences and technical data to handle all of the regular system troubles. Meanwhile, the engineering department of COSEN had been continuously improving the machines to prevent all possible troubles.

It is hoped that you will give COSEN your maintenance experience and ideas so that both sides can achieve the best performance.

PRECAUTIONS

When an abnormality occurs in the machine during operation, you can do it yourself safely. If you have to stop machine motion immediately for parts exchanging, you should do so according to the following procedures:

- Press HYDRAULIC MOTOR OFF button or EMERGENCY STOP button.
- Open the electrical enclosure door.
- Turn off breaker.



BEFORE ANY ADJUSTMENT OR MAINTENANCE OF THE MACHINE, PLEASE MAKE SURE TO TURN OFF THE MACHINE AND DISCONNECT THE POWER SUPPLY.

GENERAL TROUBLES AND SOLUTIONS



DISCONNECT POWER CORD TO MOTOR BEFORE ATTEMPTING ANY REPAIR OR INSPECTION.

TROUBLE	PROBABLE CAUSE	SUGGESTED REMEDY
Motor stalls	Excessive belt tension	Adjust belt tension so that belt does not slip on drive pulley while cutting (1/2" Min. deflection of belt under moderate pressure.)
	Excessive head pressure	Reduce head pressure. Refer to Operating Instructions "Adjusting Feed".
	Excessive blade speed	Refer to Operating Instructions "Speed Selection".
	Improper blade selection	Refer to Operating Instructions "Blade Selection".
Cannot make square cut	Dull blade	Replace blade.
	Guide rollers not adjusted properly	Refer to Adjustments.
	Rear vise jaw not adjusted properly	Set fixed vise jaw 90° to blade.
	Excessive head pressure	Reduce head pressure. Refer to operating instructions "Adjusting Feed."
Increased cutting time	Dull blade	Replace blade
	Insufficient head pressure	Increase head pressure. Refer to Operating Instructions "Adjusting Feed."
	Reduce blade speed	Refer to Operating Instructions "Speed Selection."
Will not cut	Motor running in wrong direction	Reverse rotation of motor. (Motor rotation C.C.W. pulley end.)
	Blade teeth pointing in wrong direction	Remove blade, turn blade inside out. Re-install blade. (Teeth must point in direction of travel.)
	Hardened material	Use special alloy blades. (Consult your industrial distributor for recommendation on type of blade required.)

MINOR TROUBLES & SOLUTIONS

TROUBLE	PROBABLE CAUSE	SUGGESTED REMEDY
Saw blade motor does not run even though blade drive button is pressed.	Overload relay activated	Reset
	Saw blade is not at forward limit position.	Press SAW FRAME FORWARD button

MOTOR TROUBLES & SOLUTIONS

TROUBLE	PROBABLE CAUSE	SUGGESTED REMEDY
Motor will not start	Magnetic switch open, or protector open.	Reset protector by pushing red button (inside electric box.)
	Low voltage	Check power line for proper voltage.
	Open circuit in motor or loose connections.	Inspect all lead terminations on motor for loose or open connections.
Motor will not start, fuse or circuit breakers "blow".	Short circuit in line, cord or plug.	Inspect line, cord and plug for damaged insulation and shorted wire.
	Short circuit in motor or loose connections	Inspect all lead terminations on motor for loose or shorted terminals or worn insulation on wires.
	Incorrect fuses or circuit breakers in power line.	Install correct fuses or circuit breakers.
Motor fail to develop full power. (Power output of motor decreases rapidly with decrease in voltage at motor terminals.)	Power line overloaded with lights, appliances and other motors.	Reduce the load on the power line.
	Undersize wires or circuit too long.	Increase wire sizes, or reduce length of wiring
	General overloading of power company's facilities.	Request a voltage check from the power company
Motor overheat	Motor overloaded.	Reduce load on motor
	Air circulation through the motor restricted.	Clean out motor to provide normal air circulation through motor.
Motor stalls (Resulting in blown fuses or tripped circuit breakers)	Short circuit in motor or loose connections.	Inspect terminals in motor for loose or shorted terminals or worn insulation on lead wires.
	Low voltage	Correct the low line voltage conditions.
	Incorrect fuses or circuit breakers in power line.	Install correct fuses circuit breakers.
	Motor overloaded	Reduce motor load.
Frequent opening of fuses or circuit breakers.	Motor overloaded	Reduce motor load
	Incorrect fuses or circuit breakers.	Install correct fuses or circuit breakers.

BLADE TROUBLES AND SOLUTIONS



DISCONNECT POWER CORD TO MOTOR BEFORE ATTEMPTING ANY REPAIR OR INSPECTION.

TROUBLE	PROBABLE CAUSE	SUGGESTED REMEDY
Teeth strippage	Too few teeth per inch	Use finer tooth blade
	Loading of gullets	Use coarse tooth blade or cutting lubricant.
	Excessive feed	Decrease feed
	Work not secured in vise	Clamp material securely
Blade breakage	Teeth too coarse	Use a finer tooth blade
	Misalignment of guides	Adjust saw guides
	Dry cutting	Use cutting lubricant
	Excessive speed	Lower speed. See Operating Instructions "Speed selection."
	Excessive speed	Reduce feed pressure. Refer to Operating Instructions "Adjusting Feed."
	Excessive tension	Tension blade to prevent slippage on drive wheel while cutting.
	Wheels out of line	Adjust wheels
Blade line Run-out or Run-in	Guides out of line	For a straight and true cut, realign guides, check bearings for wear.
	Excessive pressure	Conservative pressure assures long blade life and clean straight cuts.
	Support of blade insufficient	Move saw guides as close to work as possible.
	Material not properly secured in vise	Clamp material in vise, level and securely.
	Blade tension improper	Loosen or tighten tension on blade.
Blade twisting	Blade not in line with guide bearings	Check bearings for wear and alignment.
	Excessive blade pressure	Decrease pressure and blade tension
	Blade binding in cut	Decrease feed pressure
Premature tooth wear	Dry cutting	Use lubricant on all materials, except cast iron
	Blade too coarse	Use finer tooth blade
	Not enough feed	Increase feed so that blade does not ride in cut
	Excessive speed	Decrease speed

SAWING PROBLEMS AND SOLUTIONS

Other than this manual, the manufacturer also provides some related technical documents listed as follows:

Sawing Problems and Solutions

					Vibration during cutting	Failure to cut	Short life of saw blade	Curved cutting	Broken blade		
✓	✓	✓	✓	✓						Use of blade with incorrect pitch	Use blade with correct pitch suited to workpiece width
✓	✓	✓	✓	✓						Failure to break-in saw blade	Perform break-in operation
✓	✓	✓								Excessive saw blade speed	Reduce speed
			✓	✓						Insufficient saw blade speed	Increase speed
✓		✓	✓	✓						Excessive saw head descending speed	Reduce speed
✓		✓	✓							Insufficient saw head descending speed	Increase speed
		✓	✓							Insufficient saw blade tension	Increase tension
✓		✓	✓	✓						Wire brush improperly positioned	Relocate
✓		✓	✓							Blade improperly clamped by insert	Check and correct
✓	✓	✓	✓	✓						Improperly clamped workpiece	Check and correct
	✓	✓	✓							Excessively hard material surface	Soften material surface
		✓	✓	✓						Excessive cutting rate	Reduce cutting rate
	✓	✓								Non-annealed workpiece	Replace with suitable workpiece
✓		✓	✓	✓						Insufficient or lean cutting fluid	Add fluid or replace
✓		✓	✓	✓						Vibration near machine	Relocate machine
		✓	✓							Non-water soluble cutting fluid used	Replace
✓		✓	✓							Air in cylinder	Bleed air
✓		✓		✓						Broken back-up roller	Replace
✓	✓	✓	✓	✓						Use of non-specified saw blade	Replace
✓	✓	✓	✓	✓						Fluctuation of line voltage	Stabilize
✓		✓	✓							Adjustable blade guide too far from workpiece	Bring blade guide close to workpiece
✓		✓	✓	✓						Loose blade guide	Tighten
		✓		✓						Blue or purple saw chips	Reduce cutting rate
✓		✓		✓						Accumulation of chips at inserts	Clean
	✓									Reverse positioning of blade on machine	Reinstall
✓		✓	✓							Workpieces are not bundled properly	Re-bundle
✓		✓		✓						Back edge of blade touching wheel flange	Adjust wheel to obtain clearance
✓	✓	✓								Workpiece of insufficient diameter	Use other machine, suited for diameter of workpiece Replace
	✓	✓	✓							Saw blade teeth worn	Replace

SOLUTIONS TO SAWING PROBLEMS

Table Of Contents

#1. Heavy Even Wear On Tips and Corners Of Teeth	#11. Uneven Wear Or Scoring On The Sides Of Band
#2. Wear On Both Sides Of Teeth	#12. Heavy Wear And/Or Swagging On Back Edge
#3. Wear On One Side Of Teeth	#13. Butt Weld Breakage
#4. Chipped Or Broken Teeth	#14. Heavy Wear In Only The Smallest Gullets
#5. Body Breakage Or Cracks From Back Edge	#15. Body Breaking – Fracture Traveling In An Angular Direction
#6. Tooth Strippage	#16. Body Breakage Or Cracks From Gullets
#7. Chips Welded To Tooth Tips	#17. Band is Twisted Into A Figure "8" Configuration
#8. Gullets Loading Up With Material	#18. Used Band Is "Long" On The Tooth Edge
#9. Discolored Tips Of Teeth Due To Excessive Frictional Heat	#19. Used Band Is "Short" On The Tooth Edge
#10. Heavy Wear On Both Sides Of Band	#20. Broken Band Shows A Twist In Band Length.

#1. Heavy Even Wear On Tips and Corners Of Teeth



Probable Cause :

- A.** Improper break-in procedure.
- B.** Excessive band speed for the type of material being cut. This generates a high tooth tip temperature resulting in accelerated tooth wear.
- C.** Low feed rate causes teeth to rub instead of penetrate. This is most common on work hardened materials such as stainless and toolsteels.
- D.** Hard materials being cut such as "Flame Cut Edge" or abrasive materials such as " Fiber Reinforced Composites".
- E.** Insufficient sawing fluid due to inadequate supply, improper ratio, and/or improper application

#2. Wear On Both Sides Of Teeth



Probable Cause :

- A. Broken, worn or missing back-up guides allowing teeth to contact side guides.
- B. Improper side guides for band width.
- C. Backing the band out of an incomplete cut.


#3. Wear On One Side Of Teeth



Probable Cause :

- A. Worn wheel flange, allowing side of teeth to contact wheel surface or improper tracking on flangeless wheel.
- B. Loose or improperly positioned side guides.
- C. Blade not perpendicular to cut.
- D. Blade rubbing against cut surface on return stroke of machine head.
- E. The teeth rubbing against a part of machine such as chip brush assembly, guards, etc.


#4. Chipped Or Broken Teeth

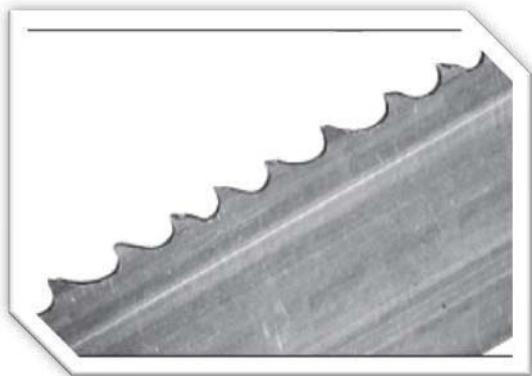

Probable Cause :

- A. Improper break-in procedure.
- B. Improper blade selection for application.
- C. Handling damage due to improper opening of folded band.
- D. Improper positioning or clamping of material.
- E. Excessive feeding rate or feed pressure.
- F. Hitting hard spots or hard scale in material


#5. Body Breakage Or Cracks From Back Edge

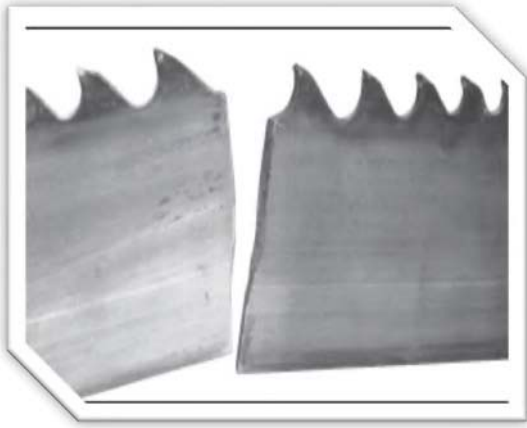

Probable Cause :

- A. Excessive back-up guide "preload" will cause back edge to work harden which results in cracking.
- B. Excessive feed rate.
- C. Improper band tracking – back edge rubbing heavy on wheel flange.
- D. Worn or defective back-up guides.
- E. Improper band tension.
- F. Notches in back edge from handling damage


#6. Tooth Strippage

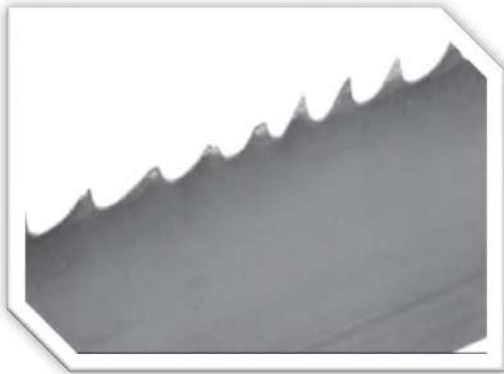

Probable Cause :

- A. Improper or lack of break-in procedure.
- B. Worn, missing or improperly positioned chip brush.
- C. Excessive feeding rate or feed pressure.
- D. Movement or vibration of material being cut.
- E. Improper tooth pitch for cross sectional size of material being cut.
- F. Improper positioning of material being cut.
- G. Insufficient sawing fluid due to inadequate supply, improper ratio and/or improper application.
- H. Hard spots in material being cut.
- I. Band speed too slow for grade of material being cut.

#7. Chips Welded To Tooth Tips

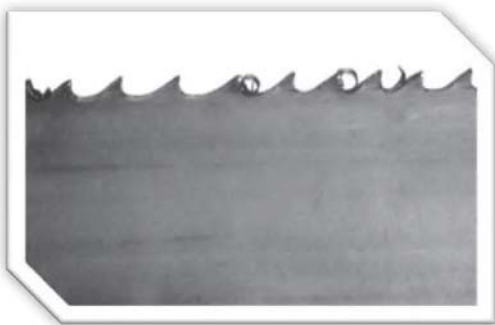

Probable Cause :

- A. Insufficient sawing fluid due to inadequate supply, improper ratio and/or improper application.
- B. Worn, missing or improperly positioned chip brush.
- C. Improper band speed.
- D. Improper feeding rate.


#8. Gullets Loading Up With Material



Probable Cause :

- A. Too fine of a tooth pitch – insufficient gullet capacity.
- B. Excessive feeding rate producing too large of a chip.
- C. Worn, missing or improperly positioned chip brush.
- D. Insufficient sawing fluid due to inadequate supply, improper ratio and/or improper application.

#9. Discolored Tips Of Teeth Due To Excessive Frictional Heat

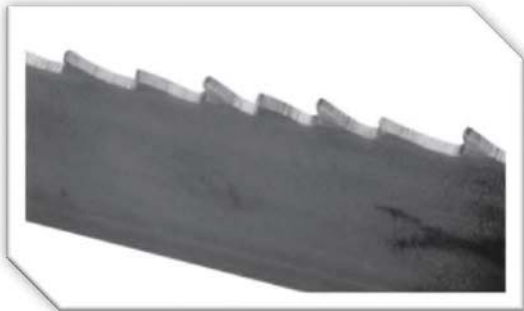

Probable Cause :

- A. Insufficient sawing fluid due to inadequate supply, improper ratio and/or improper application.
- B. Excessive band speed.
- C. Improper feeding rate.
- D. Band installed backwards.


10. Heavy Wear On Both Sides Of Band



Probable Cause :

- A. Chipped or broken side guides.
- B. Side guide adjustment may be too tight.
- C. Insufficient flow of sawing fluid through the side guides.
- D. Insufficient sawing fluid due to inadequate supply, improper ratio and/or improper application.

#11. Uneven Wear Or Scoring On The Sides Of Band

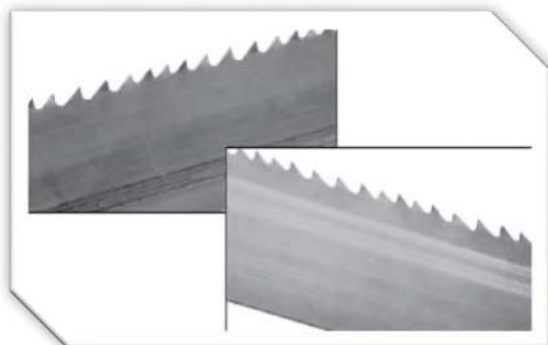

Probable Cause :

- A. Loose side guides.
- B. Chipped, worn or defective side guides.
- C. Band is rubbing on part of the machine.
- D. Guide arms spread to maximum capacity.
- E. Accumulation of chips in side guides.

#12. Heavy Wear And/Or Swagging On Back Edge



Probable Cause :

- A. Excessive feed rate.
- B. Excessive back-up guide "preload".
- C. Improper band tracking – back edge rubbing heavy on wheel flange.
- D. Worn or defective back-up guides.

#13. Butt Weld Breakage



Probable Cause :

- A. Any of the factors that cause body breaks can also cause butt weld breaks.
- (See Observations #5, #15 and #16)**


#14. Heavy Wear In Only The Smallest Gullets



Probable Cause :

- A. Excessive feeding rate.
- B. Too slow of band speed.
- C. Using too fine of a tooth pitch for the size of material being cut.


#15. Body Breaking – Fracture Traveling In An Angular Direction

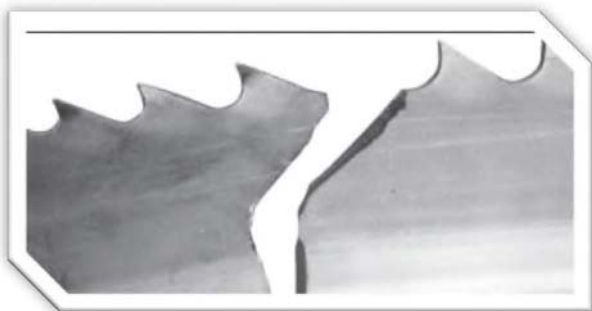

Probable Cause :

- A. An excessive twist type of stress existed.
- B. Guide arms spread to capacity causing excessive twist from band wheel to guides.
- C. Guide arms spread too wide while cutting small cross sections.
- D. Excessive back-up guide "preload".


#16. Body Breakage Or Cracks From Gullets

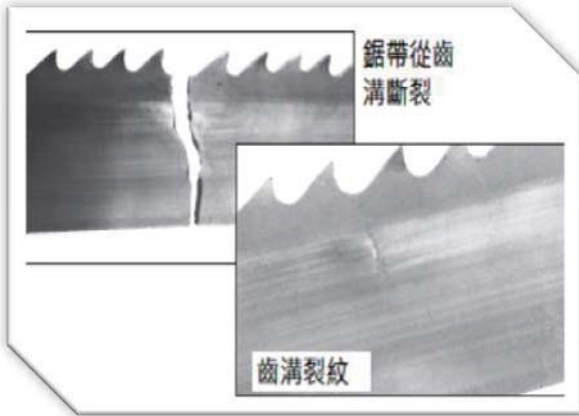

Probable Cause :

- A. Excessive back-up guide "preload".
- B. Improper band tension.
- C. Guide arms spread to maximum capacity.
- D. Improper beam bar alignment.
- E. Side guide adjustment is too tight.
- F. Excessively worn teeth.

#17. Band is Twisted Into A Figure "8" Configuration

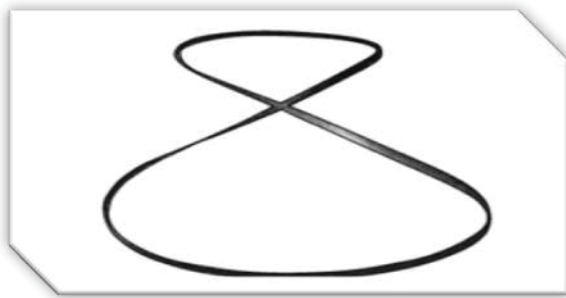

Probable Cause :

- A. Excessive band tension.
- B. Any of the band conditions which cause the band to be long (#18) or short (#19) on tooth edge.
- C. Cutting a tight radius.

#18. Used Band Is "Long" On The Tooth Edge



Probable Cause :

- A. Side guides are too tight – rubbing near gullets.
- B. Excessive "preload" – band riding heavily against back-up guides.
- C. Worn band wheels causing uneven tension.
- D. Excessive feeding rate.
- E. Guide arms are spread to maximum capacity.
- F. Improper band tracking – back edge rubbing heavy on wheel flange.


#19. Used Band Is "Short" On The Tooth Edge



Probable Cause :

- A. Side guides are too tight – rubbing near back edge.
- B. Worn band wheels causing uneven tension.
- C. Guide arms are spread too far apart.
- D. Excessive feeding rate.

#20. Broken Band Shows A Twist In Band Length

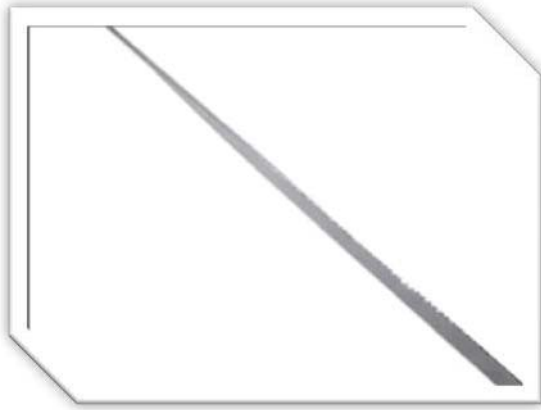

Probable Cause :

- A. Excessive band tension
- B. Any of the band conditions which cause the band to be long (#18) or short (#19) on tooth edge.
- C. Cutting a tight radius.

RE-ADJUSTING THE ROLLER TABLE

If the feeding table suffers the huge stroke and the alignment is effected, follow the below procedure to adjust.

TOOL, measuring

Measurement, Horizontal balance

Procedure

1. Screw or loosen the adjusting bolt to attain the horizontal balance (leveling) between the roller table and the machine frame.
2. Ensure that the machine frame is not struck by the loaded material on the feeding table.
3. Check the leveling by the measuring tool.
4. After finished the adjusting, fix the roller table.



If the feeding table and the machine frame are not positioned under the horizontal balance, the loaded material may be going up gradually and affect the cutting effect.

PARTS


SPARE PARTS RECOMMENDATIONS

SPARE PARTS RECOMMENDATIONS

The following table lists the common spare parts we suggest you purchase in advance:


Part Name	Part Name
Saw blade	Coolant tank filter
Wire brush	Steel plates
Carbide inserts	Rollers
Bearings	Belt
Hydraulic tank leak-proof gasket	Duster seal
Rubber washer	Oil seal
O-ring	Snap ring
Drive wheel	Idle wheel

PART P
2M ROLLER TABLE (OPTIONAL)
PART NO : 05OPR-320-2M

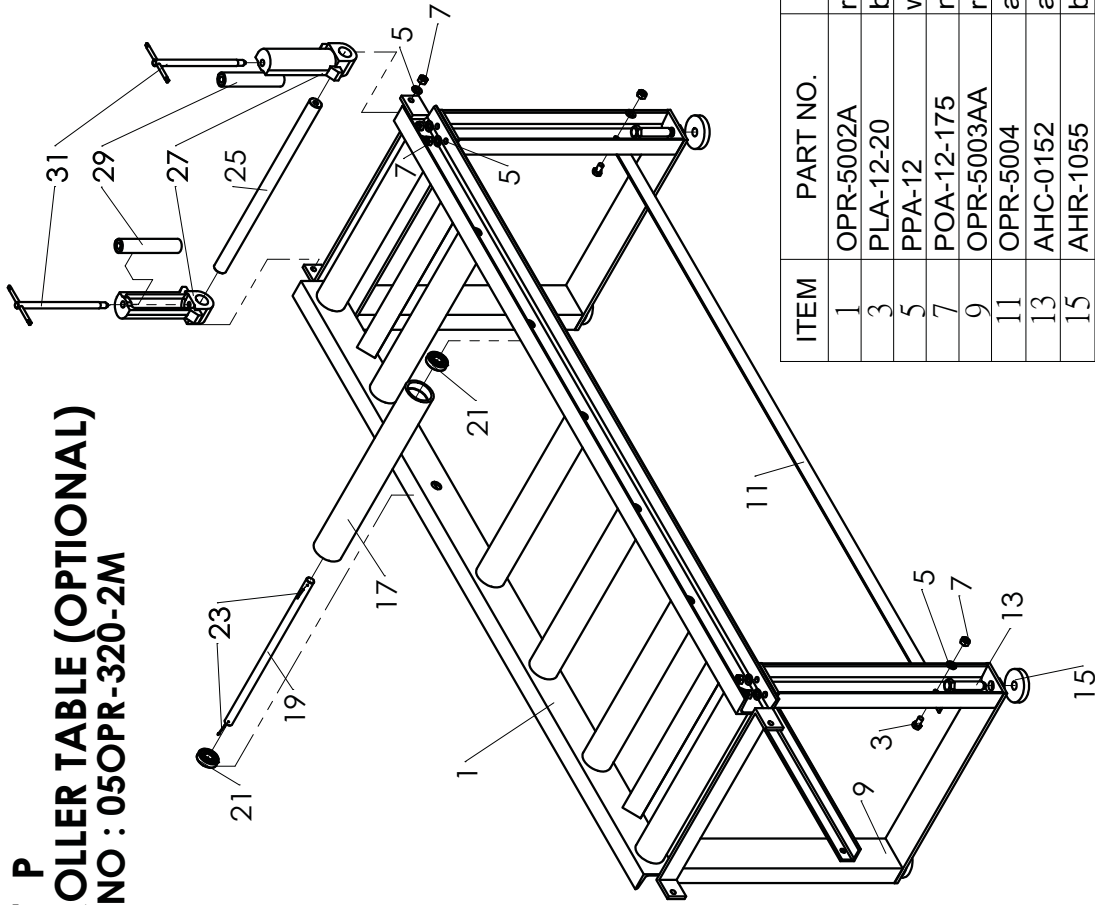

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	OPR-5002A	roller table	滾輪料架	(440W)	1	PCS
3	PLA-12-20	bolt	外六角螺絲	M12x20L	12	PCS
5	PPA-12	washer	平面華司(公)	M12	12	PCS
7	POA-12-175	nut	螺母	M12x1.75	8	PCS
9	OPR-5003AA	roller table frame	料架腳	440Wx770H	2	PCS
11	OPR-5004	angle bar	料架腳連桿		2	PCS
13	AHC-0152	adjusting bolt	送料架調整螺桿		4	PCS
15	AHR-1055	base support	底座墊塊		4	PCS
17	OPR-5001A	roller	滾輪	440W	7	PCS
19	OPR-5009A	shaft	滾輪軸	440W	7	PCS
21	PP-14297A	bearing	軸承	6304-ZZ URB	14	PCS
23	PUA-007-140	split pin	開口銷	3/32x1-1/2	14	PCS
25	OPR-5008A	side roller shaft	側滾輪滑軸	(440W)(D32*559L)	1	PCS
27	OPR-5015B	side roller bracket	側滾輪座	177L	2	PCS
29	OPR-5013B	roller	側滾輪	172L	2	PCS
31	OPR-5014B	shaft	側滾輪軸及把手	265L	2	PCS

PART R
OIL FILTER ASSEMBLY
PART NO:AGB-707270

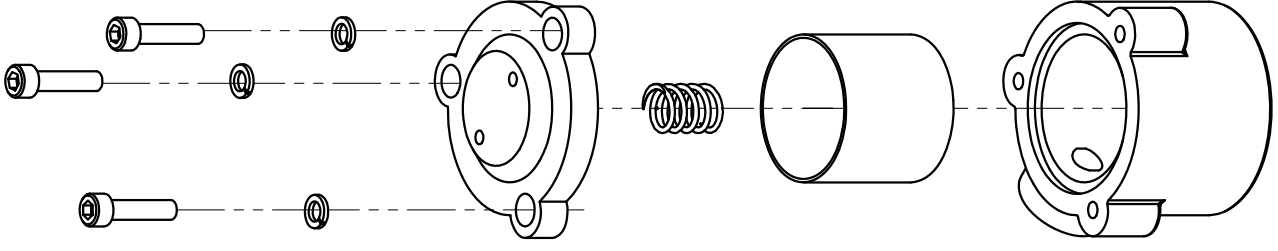


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AGB-70727	filter frame	濾油器本體		1	PCS
3	AGB-70730	filter	濾油器芯		1	PCS
5	AGB-70729	spring	濾油器彈簧		1	PCS
7	AGB-70728	cap	濾油器蓋		1	PCS
9	PQA-6	spring washer	彈簧華司	M6	3	PCS
11	PBA-6-25	bolt	有頭內六角螺絲	M6x25L	3	PCS



C2(C-260LNC) SERIES PART LIST

2018/10/24

PART H1
GEAR BOX ASSEMBLY
PART NO:AGC-03040

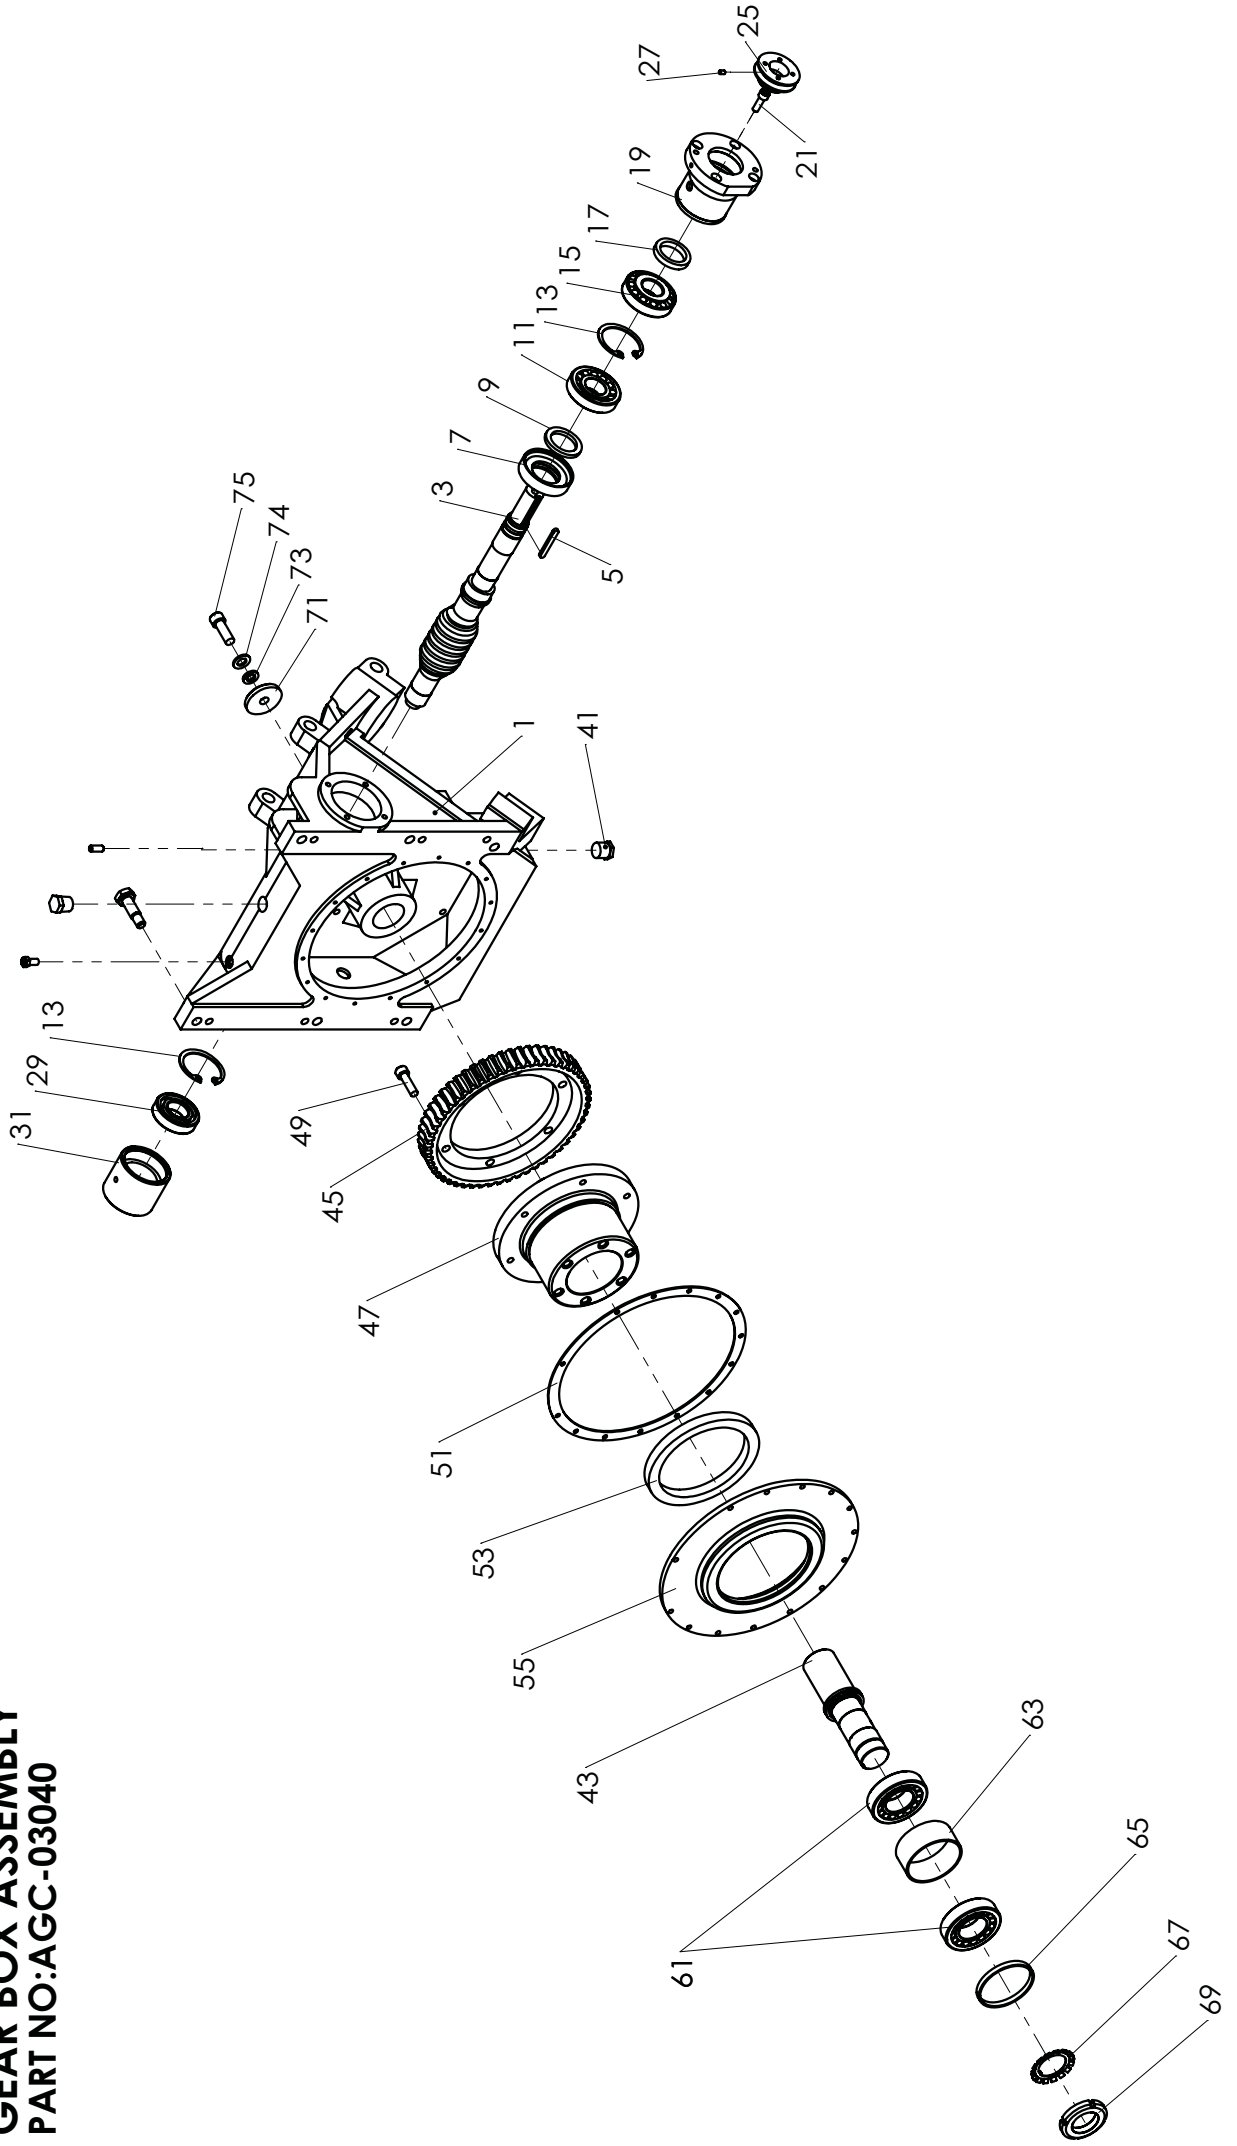




**PART H1
GEAR BOX ASSEMBLY
PART NO:AGC-03040**


C2(C-260LNC) SERIES PART LIST

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AGC-3008	hinge bracket	減速機本體		1	PCS
3	AHA-0305	worm	蝸桿		1	PCS
5	PS-4-7	key	方鍵	4x7x50L	1	PCS
7	AHA-0314	bearing support	軸承座蓋		1	PCS
9	PP-51080	oil seal	油封	E9	1	PCS
11	PP-14652	taper roller bearing	滾錐軸承	30306D	1	PCS
13	PP-58103	snap ring	內鎖	R62	2	PCS
15	PP-14691	taper roller bearing	滾錐軸承	32206	1	PCS
17	PP-511070	oil seal	油封	V38x50x5	1	PCS
19	AHA-0319	bracket	軸承座(一)		1	PCS
21	PBA-8-25	bolt	有頭內六角螺絲	M8x25L	4	PCS
23	PUC-005	grease nipple	油嘴	1/16"	1	PCS
25	AHA-0320	wire brush pulley	鋼刷普利		1	PCS
27	PAA-5-8	set screw	止付螺絲	M5x8L	2	PCS
29	PP-14131	bearing	軸承	6206Z	1	PCS
31	AHA-0326	bracket	軸承座(二)		1	PCS
33	AHA-0328	bolt	注油螺絲	M8x16L(3/16-28牙)	1	PCS
35	AHA-0307	socket head plug	透氣塞頭	1/2"	1	PCS
37	PAA-8-20	set screw	止付螺絲	M8x20L	1	PCS
39	PUC-020	grease nipple	油嘴	1/4"	1	PCS
41	PED-025	socket head plug	管塞	1/2"	1	PCS
43	AHA-0407	wheel shaft	下輪軸		1	PCS
45	AHA-0404	worm wheel	蝸桿		1	PCS
47	AHA-0406	housing	蝸桿固定座		1	PCS
49	PBA-10-35	bolt	有頭內六角螺絲	M10x35L	6	PCS
51	AHA-0454	rubber washer	橡膠墊圈		1	PCS
53	PP-51090A	oil seal	油封	130x160x14	1	PCS
55	AHA-0433	fixed ring	油封固定盤		1	PCS
57	PBA-6-16	bolt	有頭內六角螺絲	M6x16L	14	PCS
59	PQA-6	spring washer	彈簧華司	M6	14	PCS
60	PPA-6	washer	平面華司	M6	14	PCS
61	PP-14693	taper roller bearing	滾錐軸承	32208	1	PCS
63	AHA-0431	bearing washer	軸承墊圈		1	PCS
65	AHA-0429	adjust collar	調整環		1	PCS
67	PP-14958	toothed washer	止動環	AW08	1	PCS
69	PP-14908	toothed nut	固定螺母	AN08	1	PCS
71	AHA-0403	lock washer	鎖緊墊圈		1	PCS
73	PQA-12	spring washer	彈簧華司	M12	1	PCS
74	PPA-12	washer	平面華司	M12	1	PCS
75	PBA-12-35	bolt	有頭內六角螺絲	M12x35L	1	PCS
77	AHA-0309	fixed bolt	固定螺絲		2	PCS

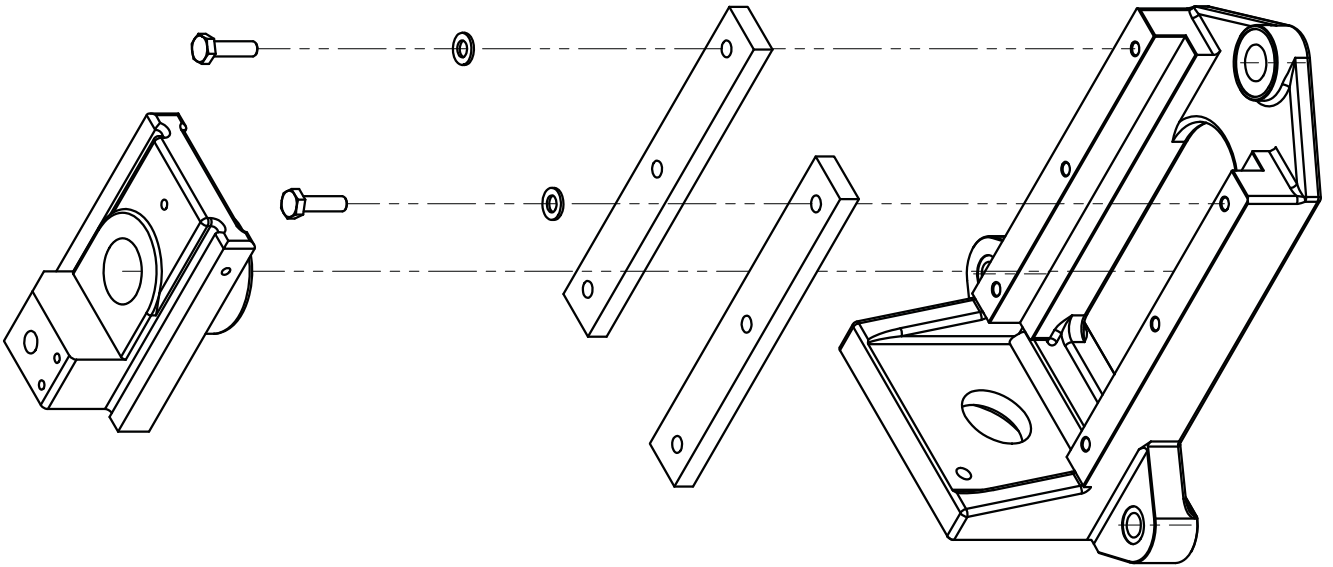


PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	tension body	張力:滑座		1	PCS
3	slide piece	張力:滑板		1	PCS
5	guide plate	壓板		2	PCS
7	hexagon head bolt	外六角螺絲	M8x30L	8	PCS
9	spring washer	彈簧華司	M8	8	PCS
11	washer	平面華司	M8	8	PCS


**PART M2
FLOW CONTROL VALVE ASSEMBLY
PART NO:AHA-6100**

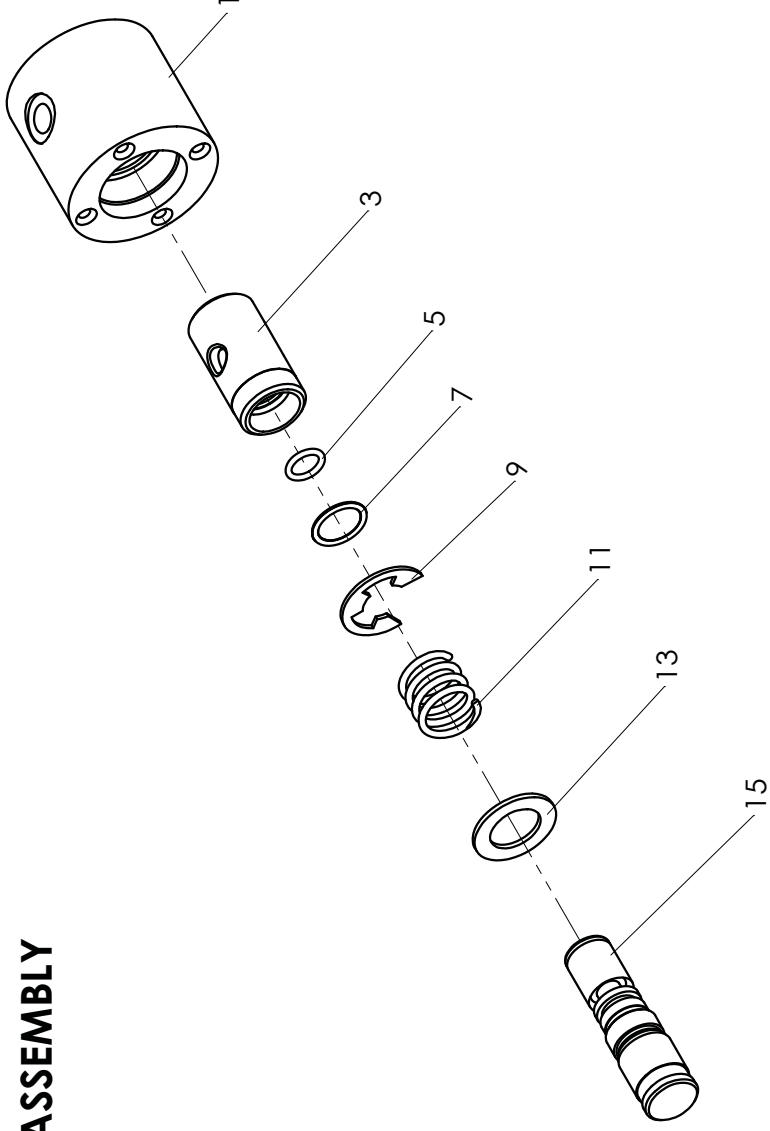


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-1039	valve seat	閥座		1	PCS
3	AHA-1043	valve sleeve	針閥套筒		1	PCS
5	PP-59071	o-ring	O型環	P-15	1	PCS
7	PP59075	o-ring	O型環	P-19	1	PCS
9	PP-58152	snap ring	E扣環	E-19	1	PCS
11	AHA-1042	spring	彈簧		1	PCS
13	AHA-1041	washer	彈簧墊圈		1	PCS
15	AHA-1040	valve	針閥		1	PCS

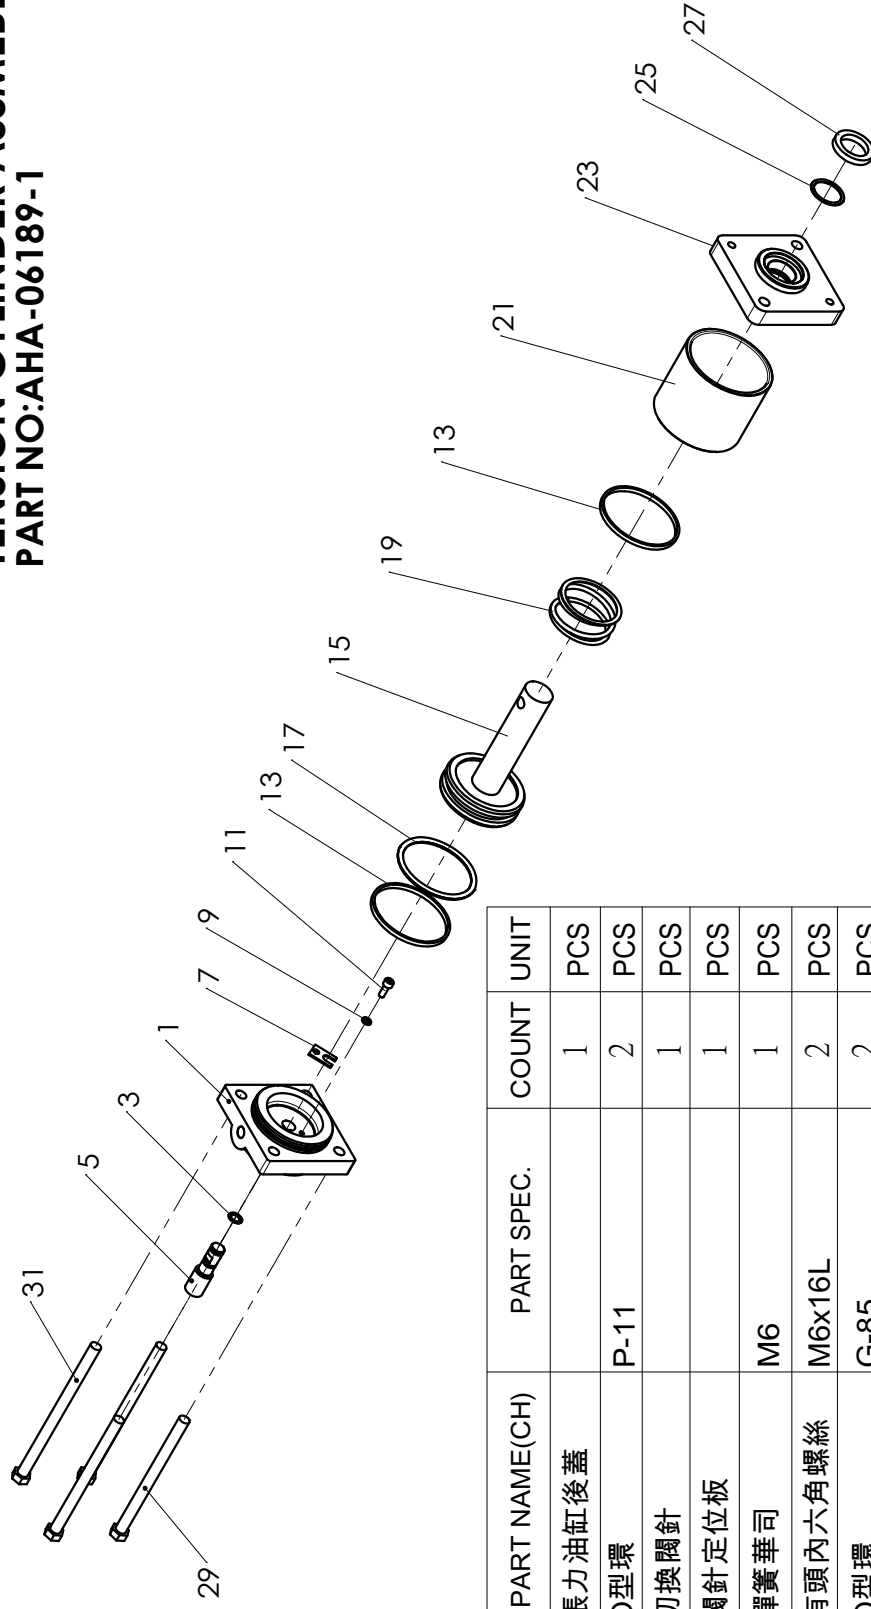


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-0618C	cylinder rear cap	張力油缸後蓋		1	PCS
3	PP-59050	o-ring	O型環	P-11	2	PCS
5	AHB-0651	needle rod	切換閥針		1	PCS
7	AHB-0655	plate	閥針定位板		1	PCS
9	PQA-6	spring washer	彈簧華司	M6	1	PCS
11	PBA-6-16	bolt	有頭內六角螺絲	M6x16L	2	PCS
13	PP-59600	o-ring	O型環	G-85	2	PCS
15	AHA-0618A	piston	活塞及桿(張力油缸)		1	PCS
17	PP-59180	o-ring	O型環	P-80	1	PCS
19	AHN-3313	spring	張力油壓缸內彈簧		1	PCS
21	AHA-0618D	cylinder	張力油壓缸管		1	PCS
23	AHA-0618B	cylinder front cap	張力油壓缸前蓋		1	PCS
25	PP-59120	o-ring	O型環	P-32	1	PCS
27	PP-51141	oil seal	油封	32x45x7	4	PCS
29	PP-90859	hexagon head bolt	外六角螺栓	M12*165L	2	PCS
31	PP-90860	hexagon head bolt	外六角螺栓	M12*190L	2	PCS

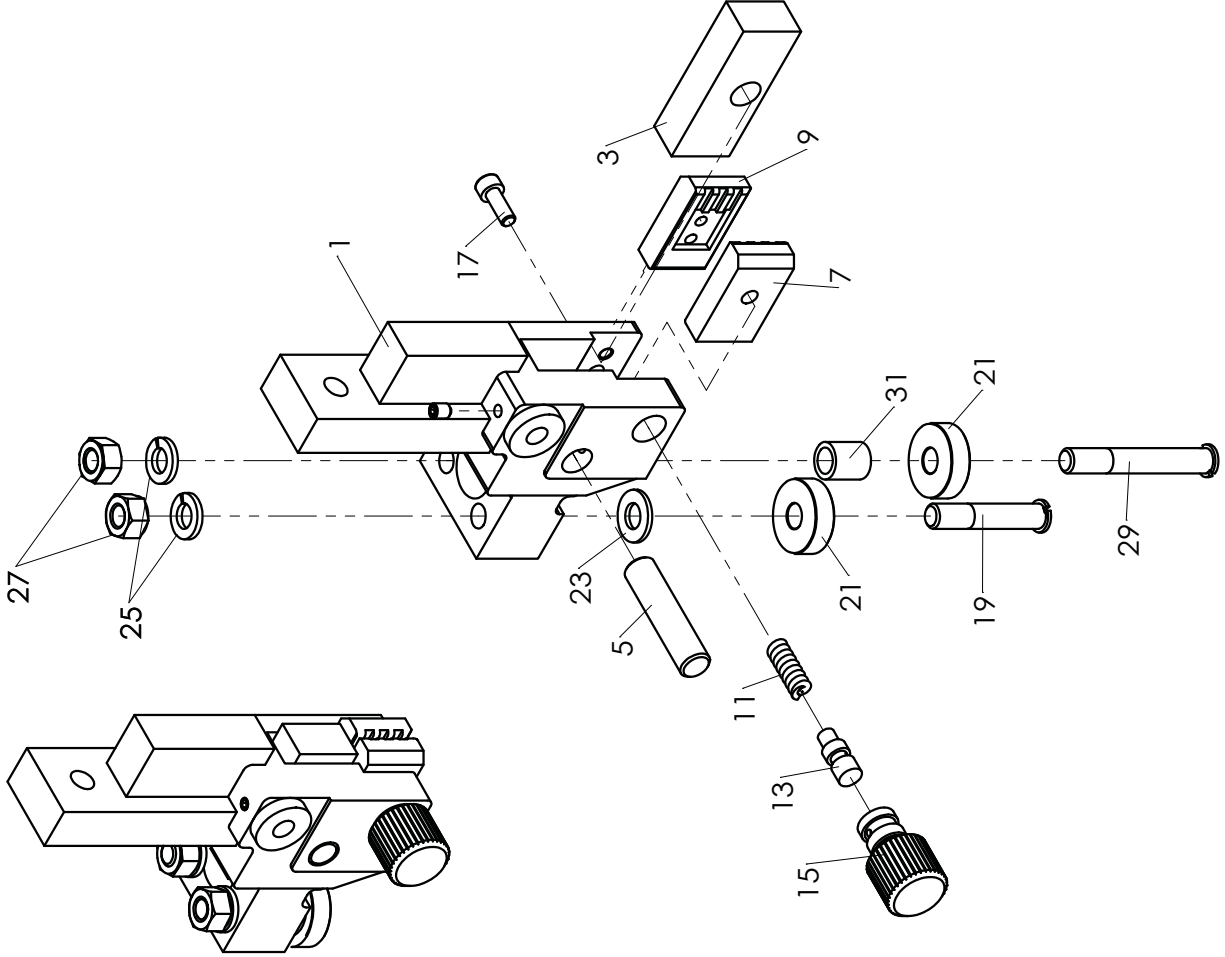


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-0712B	left insert holder	左導輪座	1 1/4	1	PCS
3	AHA-0704A	pressure block	下壓座 (EU79用)		1	PCS
5	AHA-0713-1	shaft	軸承座固定軸		1	PCS
7	AHA-0702B	left fixed insert	左活動鑄鋼片	1 1/4	1	PCS
9	AHA-0701B	left movable insert	右固定鑄鋼片	1 1/4	1	PCS
11	AHA-0710	spring	鑄鋼片彈簧		1	PCS
13	AHA-0709	left fitting	左簧塞		1	PCS
15	AHA-0711	left insert knob	左調整螺絲		1	PCS
17	PBA-6-20	bolt	有頭內六角螺絲	M6x20L	2	PCS
19	AHA-0707C	roller pin	導輪軸(三)		1	PCS
21	PP-14270	bearing	軸承	6200VV	2	PCS
23	PPA-10	washer	平面華司(公)	M10	1	PCS
25	PQA-10	spring washer	彈簧華司	M10	2	PCS
27	POA-10-15	nut	螺帽	M10	4	PCS
29	AHA-0707B	roller pin	導輪軸	1 1/4	1	PCS
31	AHA-0708B	washer	導輪墊圈	1 1/4	1	PCS

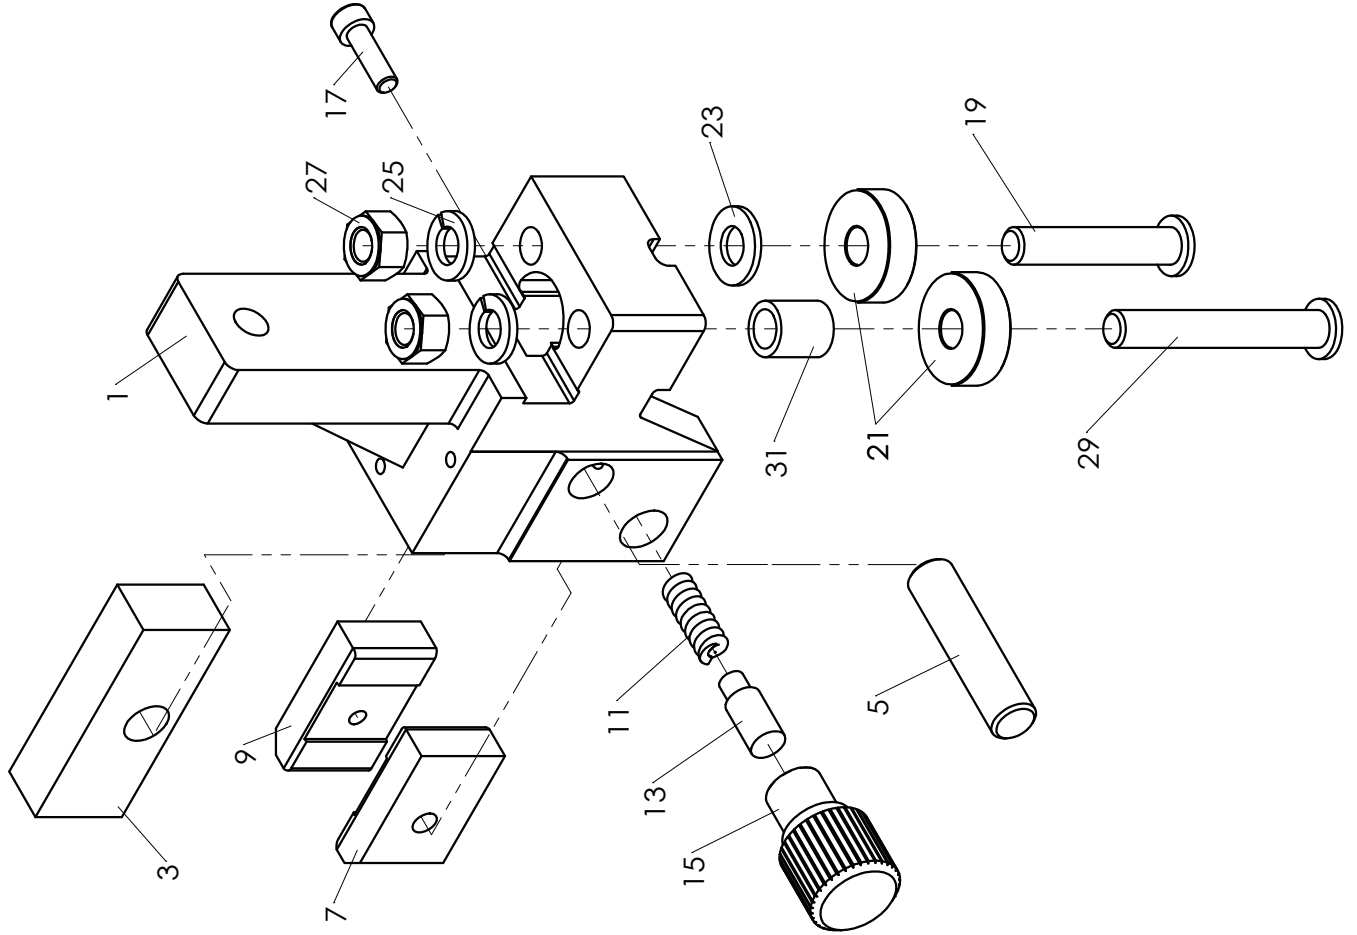


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-0748B	right insert holder	右導輪座	1 1/4	1	PCS
3	AHA-0704A	pressure block	下壓座	(EU79用)	1	PCS
5	AHA-0713-1	shaft	軸承座固定軸		1	PCS
7	AHA-0702B	left fixed insert	左活動鎢鋼片	1 1/4	1	PCS
9	AHA-0701B	left movable insert	右固定鎢鋼片	1 1/4	1	PCS
11	AHA-0710	spring	鎢鋼片彈簧		1	PCS
13	AHA-0709	left fitting	左簧塞		1	PCS
15	AHA-0711	left insert knob	左調整螺絲		1	PCS
17	PBA-6-20	bolt	有頭內六角螺絲	M6x20L	2	PCS
19	AHA-0707C	roller pin	導輪軸(三)	54L	1	PCS
21	PP-14270	bearing	軸承	6200VV	2	PCS
23	PPA-10	washer	平面華司(公)	M10	1	PCS
25	PQA-10	spring washer	彈簧華司	M10	2	PCS
27	POA-10-15	nut	螺帽	M10	4	PCS
29	AHA-0707B	roller pin	導輪軸	70L	1	PCS
31	AHA-0708B	washer	導輪墊圈	1 1/4	1	PCS

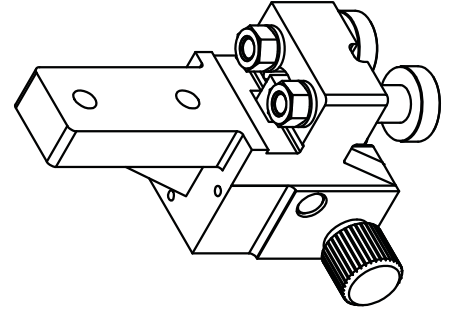

**PART M1
REGULATOR SET ASSEMBLY
PART NO: AHA-10289**

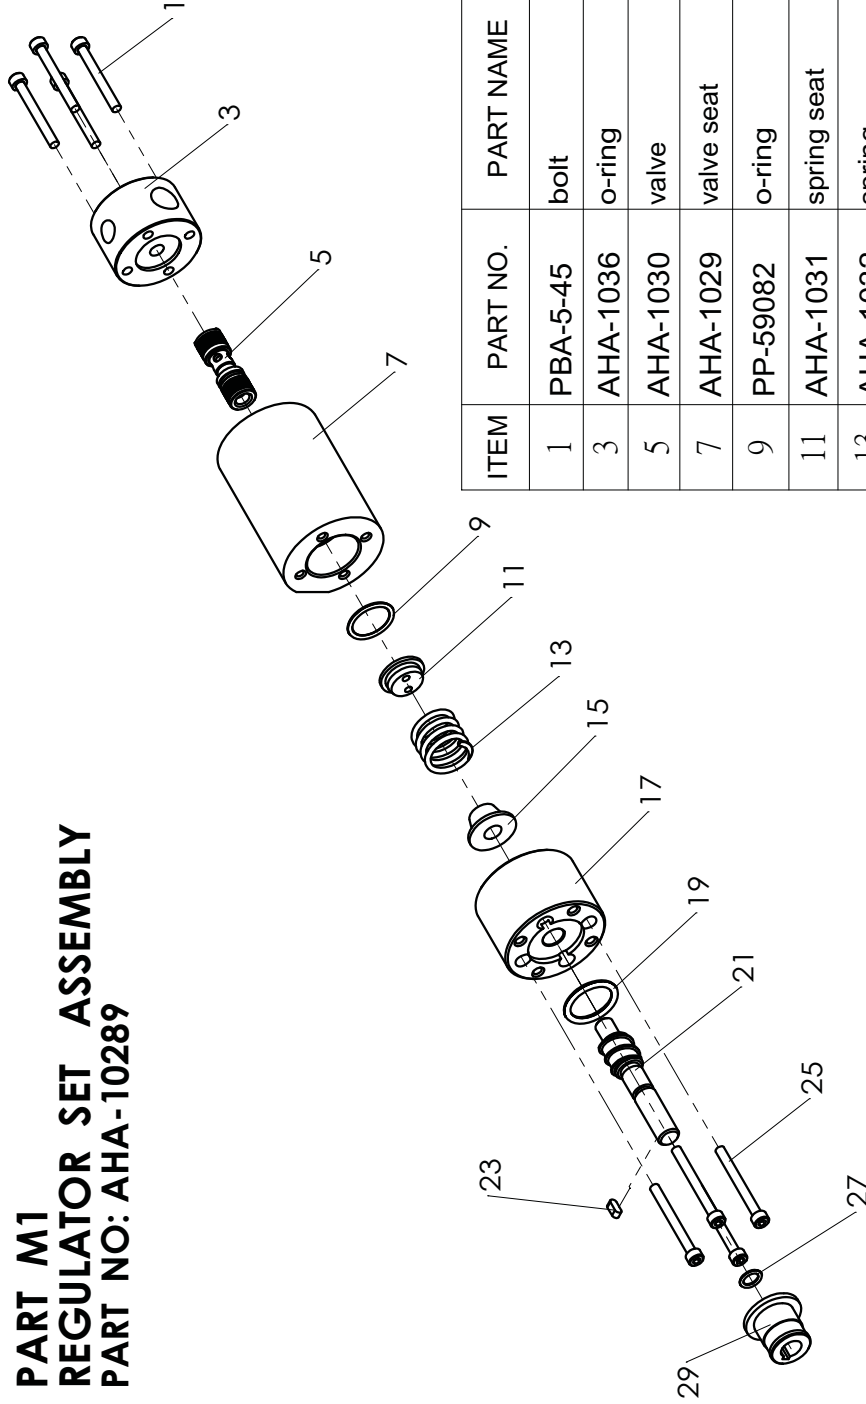


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	PBA-5-45	bolt	有頭內六角螺絲	M5x45L	4	PCS
3	AHA-1036	o-ring	後蓋		1	PCS
5	AHA-1030	valve	針閥		1	PCS
7	AHA-1029	valve seat	閥座		1	PCS
9	PP-59082	o-ring	O型環	P-22	1	PCS
11	AHA-1031	spring seat	彈簧定位套(一)		1	PCS
13	AHA-1032	spring	彈簧		1	PCS
15	AHA-1033	spring seat	彈簧定位套(二)		1	PCS
17	AHA-1035	front cap	前蓋		1	PCS
19	PP-59090	o-ring	O型環	P-24	1	PCS
21	AHA-1034	adjusting bolt	調整螺栓		1	PCS
23	PS-4-4-10	key	方鍵	4x4x10L	1	PCS
25	PBA-5-50	bolt	有頭內六角螺絲	M5x50L	4	PCS
27	PP-59030	o-ring	O型環	P-9	1	PCS
29	AHA-1037	dial seat	旋鈕座		1	PCS

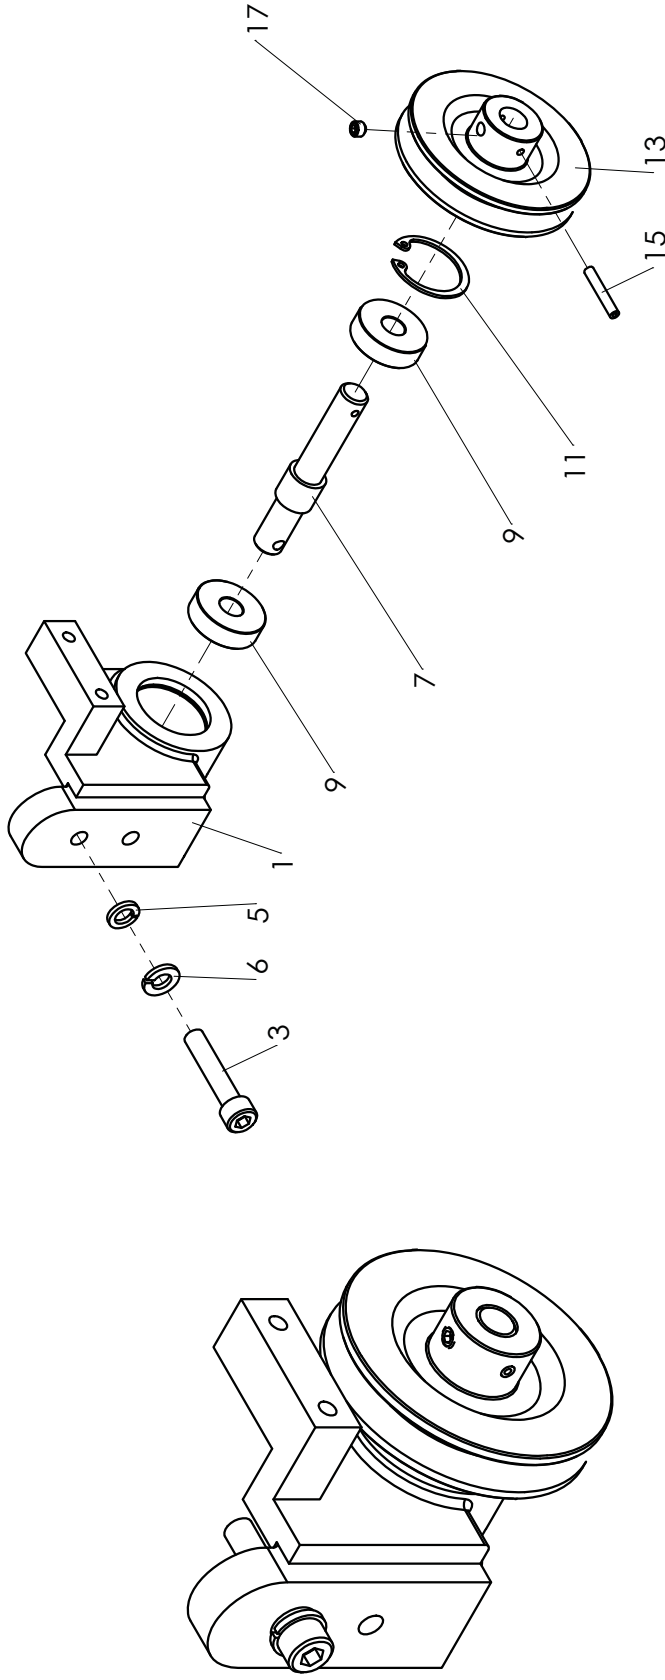


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-1211	bearing bracket	軸承座		1	PCS
3	PBA-8-40	bolt	有頭內六角螺絲	M8x40L	2	PCS
5	PQA-8	spring washer	彈簧華司	M8	2	PCS
6	PPA-8	washer	平面華司	M8	2	PCS
7	AHA-1207	pulley shaft	皮帶輪軸		1	PCS
9	PP-14270	bearing	軸承	6200V	2	PCS
11	PP-58109	snap ring	扣環	R32	1	PCS
13	AHA-1202	brush pulley	鋼刷皮帶輪		1	PCS
15	PRA-4-25	spring pin	彈簧銷	Φ 4x25L	1	PCS
17	PAA-6-6	set screw	止付螺絲	M6x6L	1	PCS

PART O ANTI-VIBRATION ROLLER ASSEMBLY (OPTIONAL) PART NO: AHA-33010



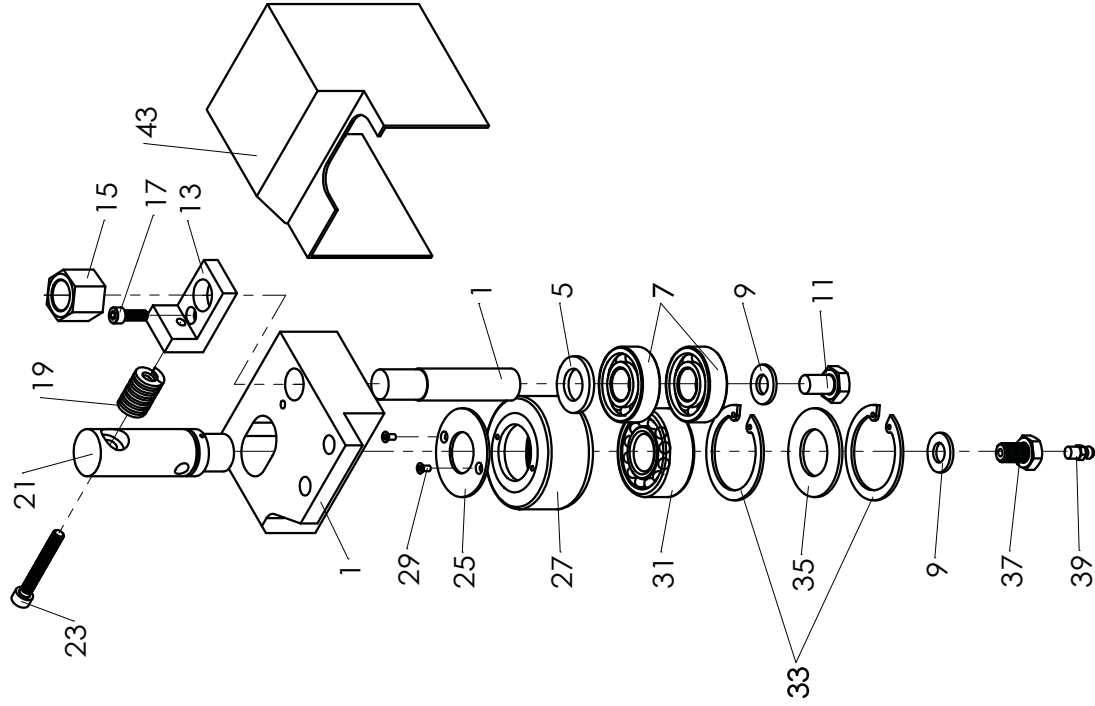


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC	COUNT	UNIT
1	C320G-4221	roller housing	防震座		1	PCS
3	AHA-3305	anti-vibration roller shaft	固定導輪座		1	PCS
5	PPA-16	flat washer	平面華司(公)	M16	1	PCS
7	PP-14267	bearing	軸承	62032R	2	PCS
9	PPA-10	flat washer	平面華司(公)	M10	2	PCS
11	PLA-10-16	bolt	外六角螺絲	M10x16L	1	PCS
13	AGB-3306N	spring adapter	防震彈簧座		1	PCS
15	POA-16-20	nut	螺母	M16	1	PCS
17	PBA-5-16	bolt	有頭內六角螺絲	M5x16L	1	PCS
19	PP-57403	spring	彈簧	TH-1625	1	PCS
21	C510M-4231A	anti-vibration roller shaft	防震導輪軸		1	PCS
23	PBA-6-45	bolt	有頭內六角螺絲	M6x45L	1	PCS
25	AGB-3308	rubber plate	遮水橡皮		1	PCS
27	AHA-3301	anti-vibration roller	防震導輪		1	PCS
29	PJA-3-6	screw	平頭螺絲	M3x6L	2	PCS
31	PP-14507	bearing	調心軸承	2204	1	PCS
33	PP-58111	snap ring	扣環	R47	2	PCS
35	AGB-3307A	grease seal plate	牛油擋	26x47x2	1	PCS
37	AGB-3309	nipple bolt	油嘴螺絲		1	PCS
39	PUC-020	nipple	油嘴	1/4-28UNF	1	PCS
41	PRD-8-40	pin	平行銷	Ø8x40mmL	1	PCS
43	C320G-3397A	cover	防震導輪護蓋		1	PCS

PART Q CHECK STRAIGHT SENSOR MODULE(OPTIONAL) PART NO : AHC-33010

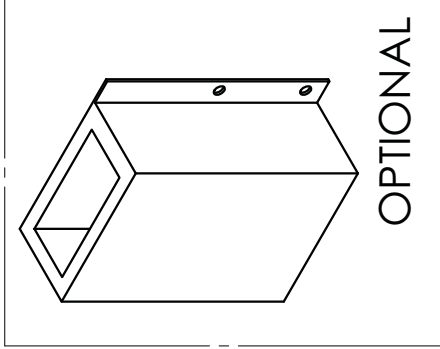

OPTIONAL

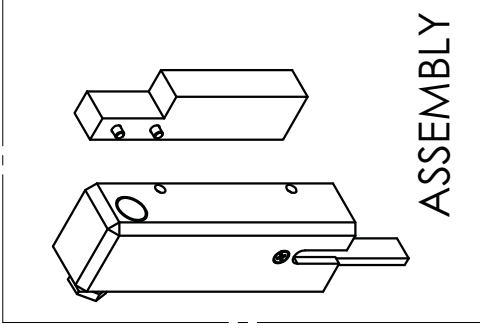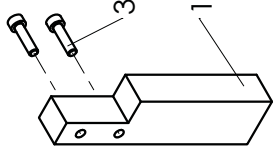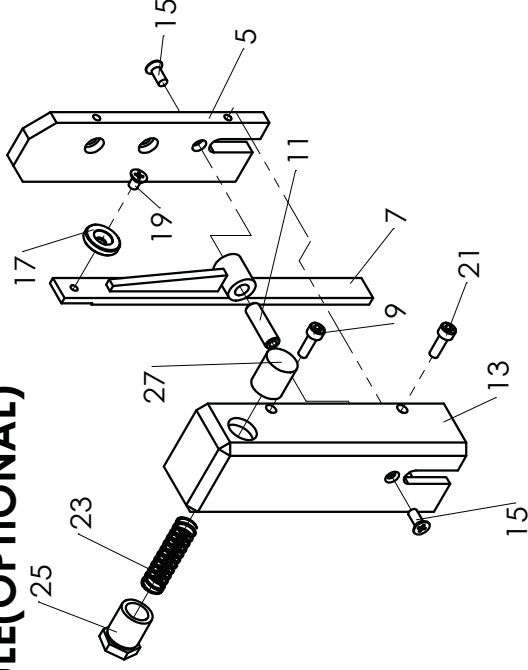

ASSEMBLY

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	NGG-3323	fixed plate	歪斜檢知固定板		1	PCS
3	PBA-5-20	bolt	有頭內六角螺絲	M5xP0.8x20L	2	PCS
5	AHC-3301	base	歪斜檢知本體	(32W)	1	PCS
7	AHC-3302	bed plate	偵測底板	鋸帶32W用	1	PCS
9	NGG-3303	thimble	鑄鋼頂針		1	PCS
11	AHC-3304	sensor rod	偵測板轉軸		1	PCS
13	AHC-3305	protecting cover	歪斜檢知護蓋		1	PCS
15	PJA-5-15	bolt	平頭螺絲(十字)	Φ 5x15L	2	PCS
17	AHC-3306	sensor board	偵測板		1	PCS
19	PJA-5-8	bolt	平頭螺絲(十字)	Φ 5x8L	1	PCS
21	PBA-5-15	bolt	有頭內六角螺絲	M5xP0.8x15L	7	PCS
23	M3L-9-10	spring	微動彈簧		1	PCS
25	NGG-3309	holder	偵測彈簧座		1	PCS
27	PP-90419	sensor	近接開關	BAW M18ME-UAC50B-BP03	1	PCS
29	AER-3107	protecting cover	線速表護蓋(視機種選配)	OPTIONAL	1	PCS




C2(C-260LNC) SERIES PART LIST

2018/10/24

PART G IDLE WHEEL MOTOR ASSEMBLY

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	C260L-3001A	saw bow	鋸弓		1	PCS
3	AHA-0634B	idle wheel	上輪		1	PCS
5	AHA-0635	wheel shaft	上輪軸		1	PCS
9	PP-14613	bearing	滾錐軸承	30207	2	PCS
11	AHA-0637	bearing collar	上輪軸承墊圈		1	PCS
13	PP-14957	toothed ring	止動環	AW07	1	PCS
15	PP-14907	toothed nut	固定螺母	AN07	1	PCS
17	SHA-04140	bearing cap	上輪軸蓋		1	PCS
19	PBA-8-35	bolt	有頭內六角螺絲	M8x35L	3	PCS
21	PUC-005	grease nipple	油嘴	1/16"	1	PCS
27	AHA-06029	tension assembly	張力滑座滑板組		1	PCS
29	AHA-0610	adjusting bolt	調整螺絲		3	PCS
31	PQA-12	spring washer	彈簧華司	M12	3	PCS
32	PPA-12	washer	平面華司	M12	3	PCS
33	PBA-12-80	bolt	有頭內六角螺絲	M12x80L	3	PCS
35	AHA-0611	adjusting nut	調整螺母		3	PCS
37	AHA-0403	lock washer	鎖緊墊圈		1	PCS
39	PPA-12	washer	平面華司	M12	1	PCS
41	PBA-12-35	bolt	有頭內六角螺絲	M12x35L	1	PCS
43	AHA-06189-1	tension cylinder	張力油壓缸組	(市購件)	1	PCS
45	AHB-0653	valve lever	切換把手		1	PCS
47	PAA-6-10	set screw	止付螺絲	M6x10L	1	PCS
49	AHB-0660	legend plate	鋸片鬆緊銘牌	CS-88	1	PCS
51	PP-20250	plug	彎管接頭	PT1/8**1/4"	4	PCS
53	AHA-0670A	bracket	感應器底板座		1	PCS
55	PQA-5	spring washer	彈簧華司	M5	2	PCS
56	PPA-5	washer	平面華司	M5	2	PCS
57	PBA-5-6	bolt	有頭內六角螺絲	M5x6L	2	PCS
59	AHA-0672	proximity switch mounting plate	感應器底板座		1	PCS
61	PQA-5	spring washer	彈簧華司	M5	2	PCS
62	PPA-5	washer	平面華司	M5	2	PCS
63	PBA-5-8	bolt	有頭內六角螺絲	M5x8L	2	PCS

**PART G
IDLE WHEEL MOTOR ASSEMBLY**

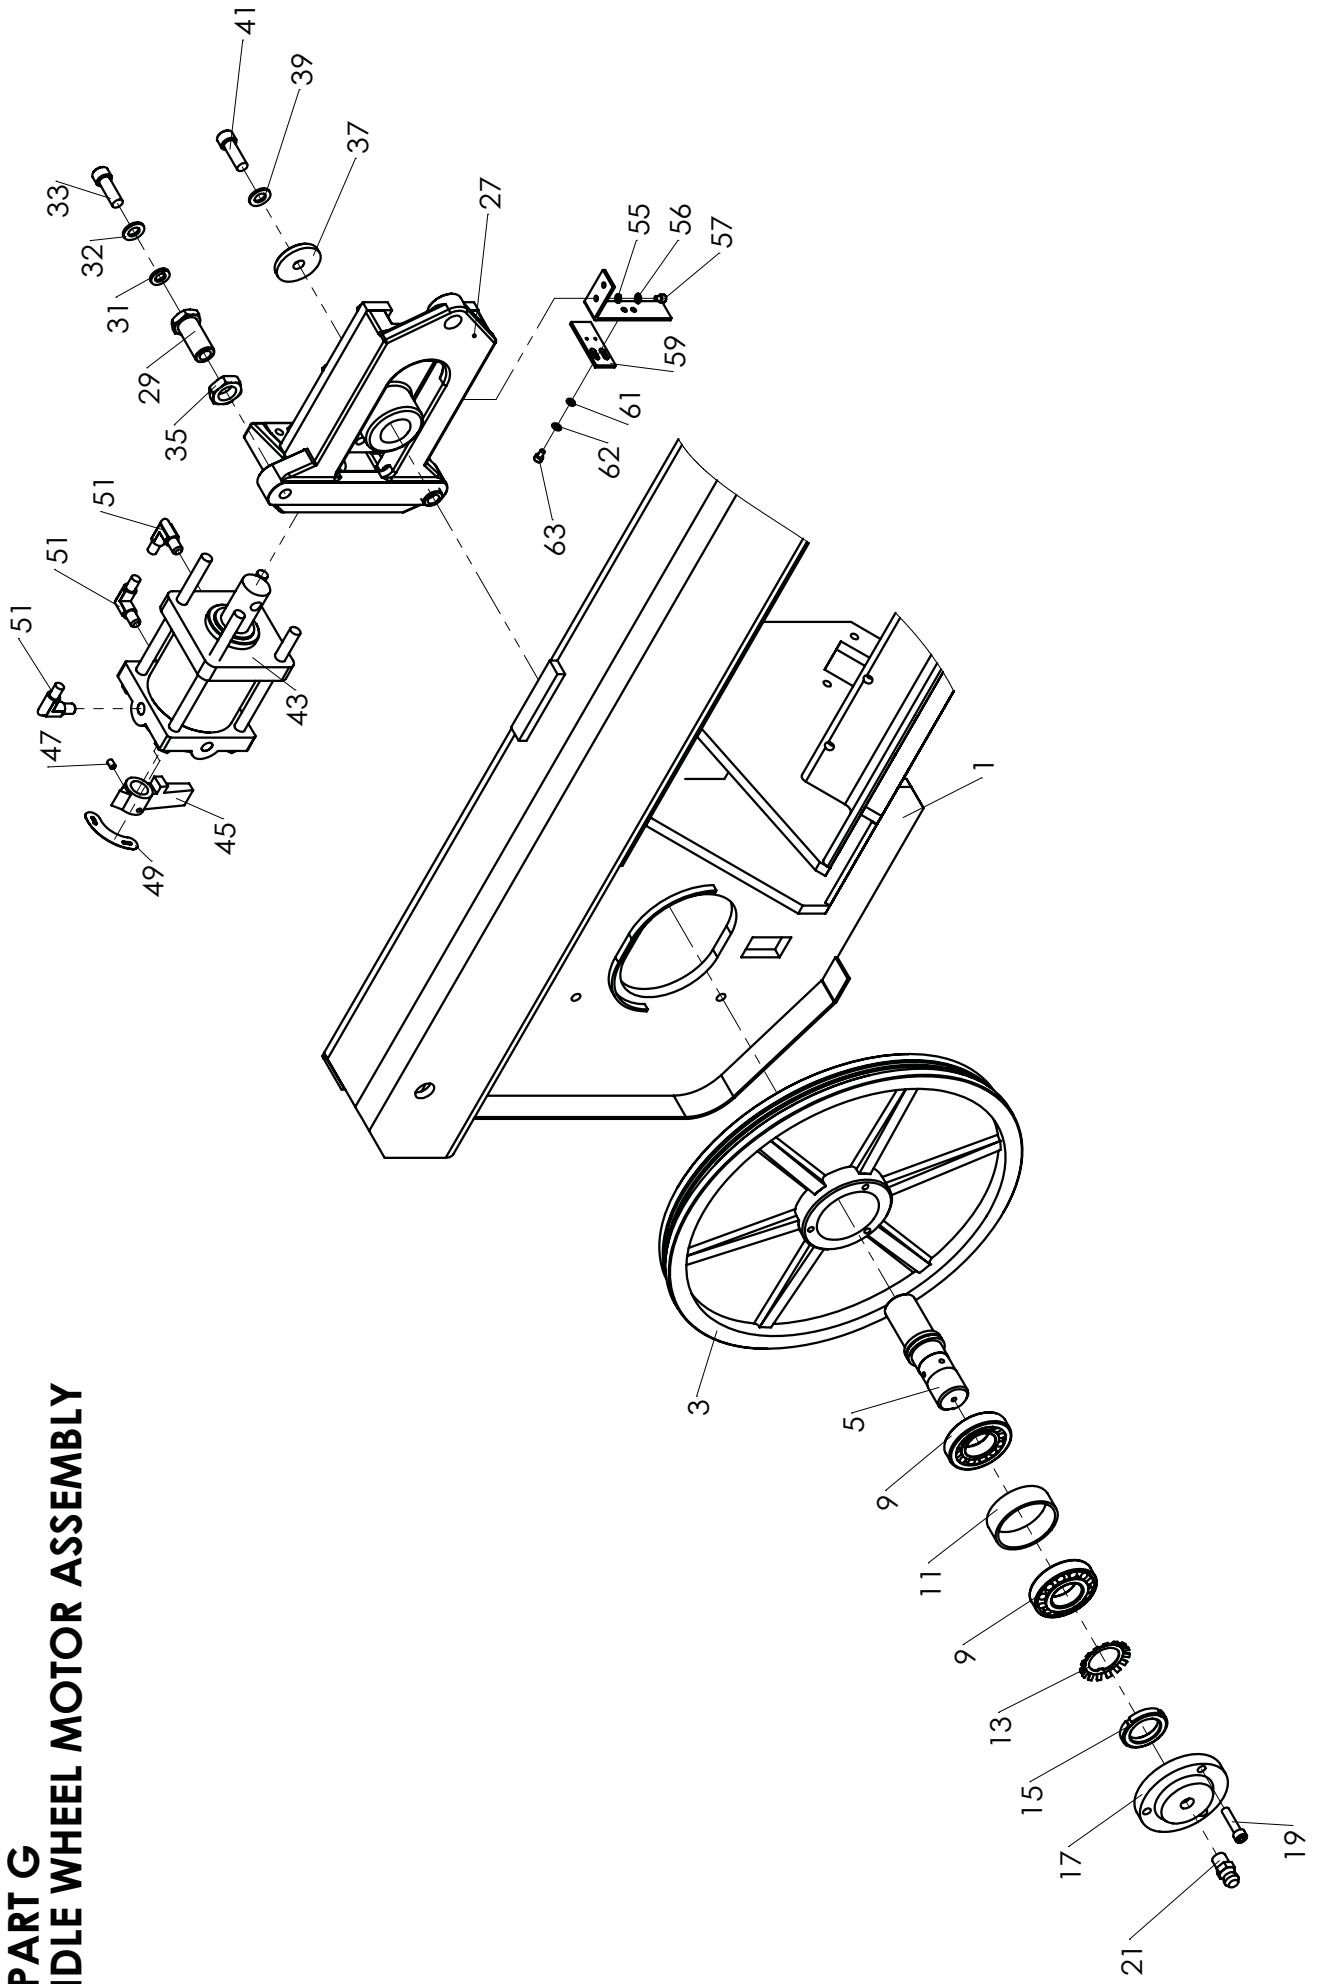




2018/10/30

C2(C-260LNC)-EU168 SERIES PART LIST

PART C BED ASSEMBLY

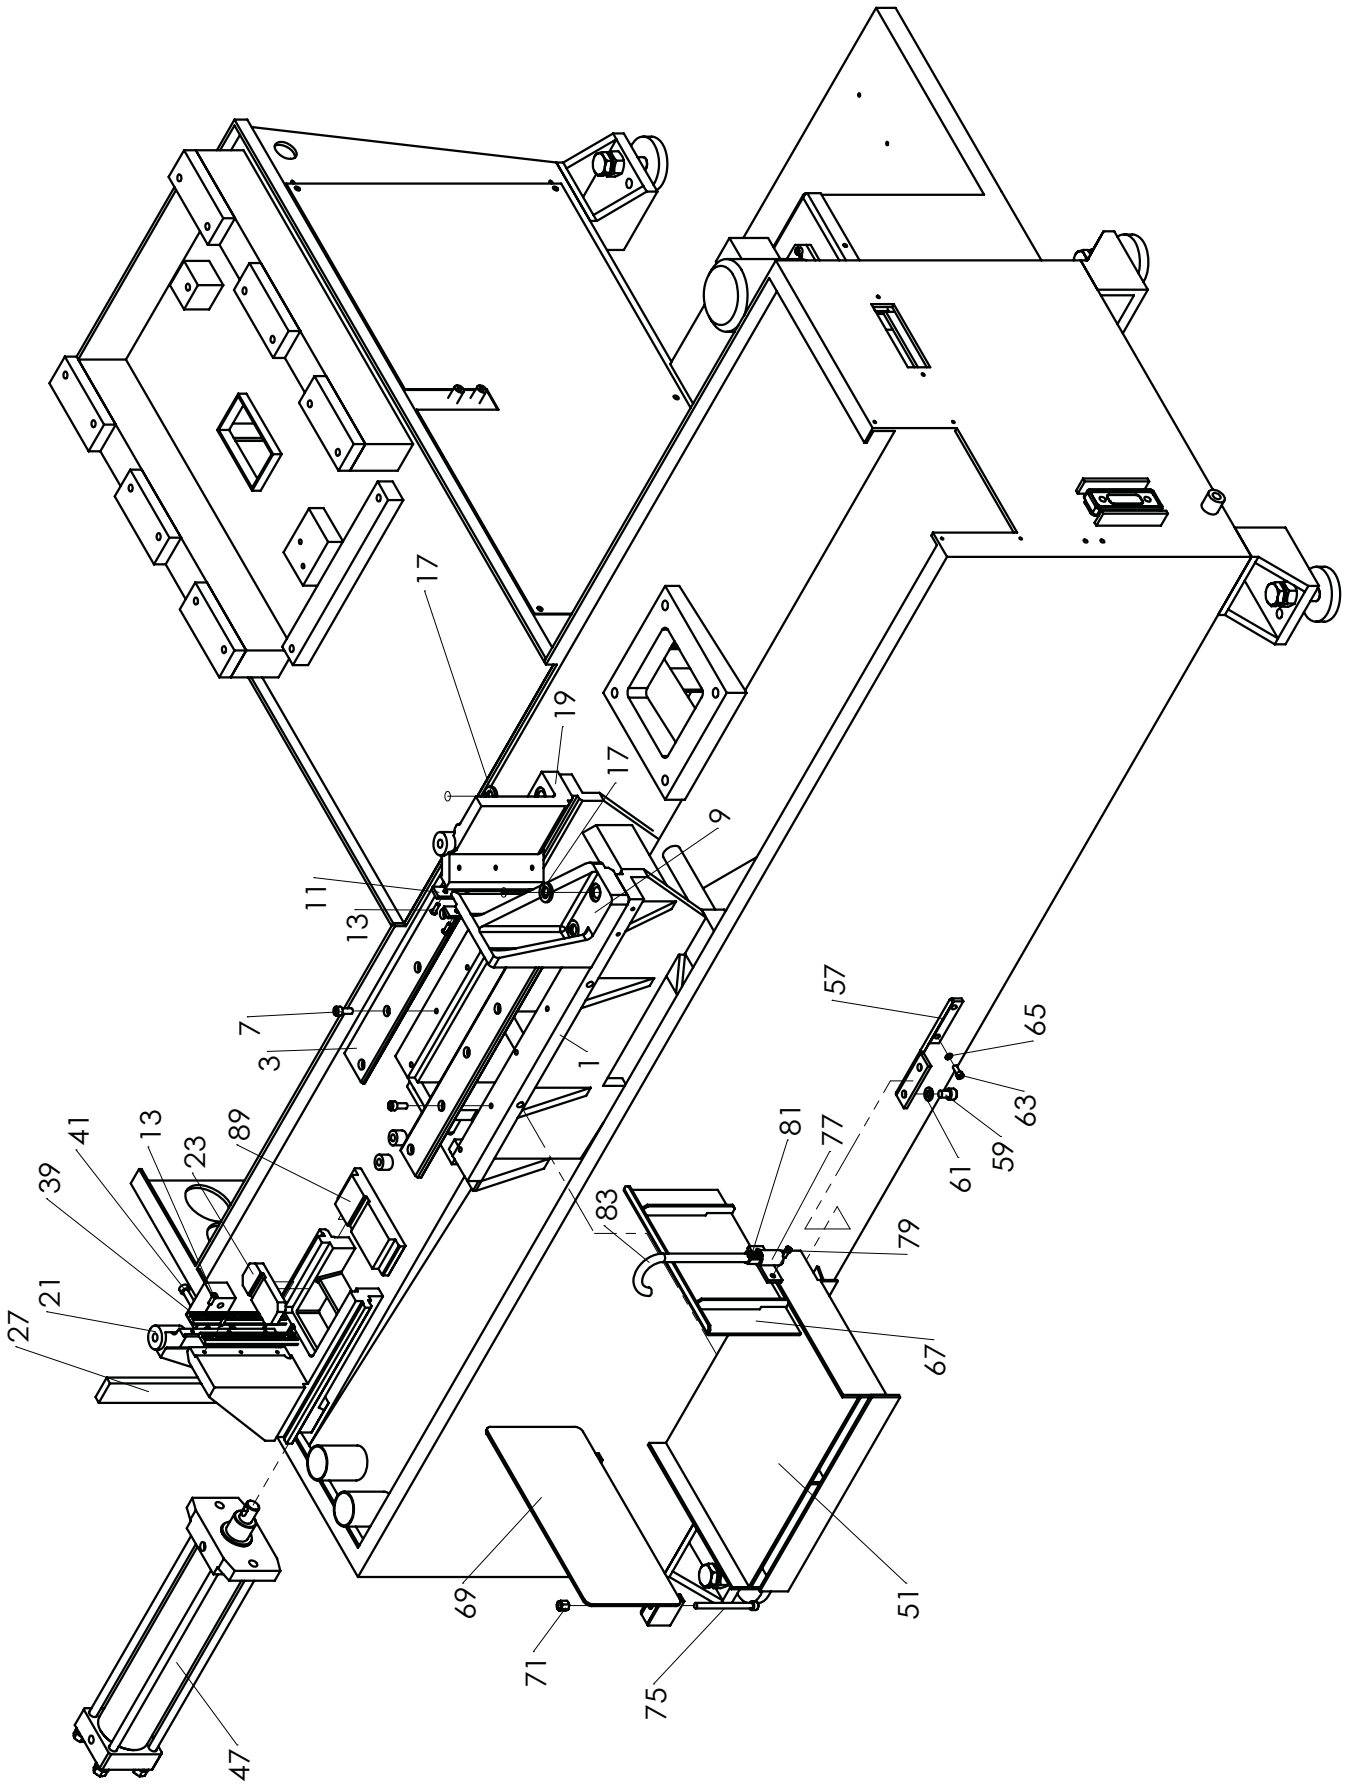




C2(C-260LNC)-EU168 SERIES PART LIST

2018/10/30

PART C BED ASSEMBLY


ITEM	PART NO.	PART NAME	PART NAME (CH)	PART SPEC.	COUNT	UNIT
1	C260L-2001A	vise bed	床面		1	PCS
3	C260L-2003	slide plate	床面鋼板(一)		1	PCS
5	C260L-2005	slide platr	床面鋼板(二)		1	PCS
7	PBA-8-20	bolt	有頭內六角螺絲	M8xP1.25x20L	10	PCS
9	AHC-0230	front fixed vise jaw	前固定虎鉗(二)		1	PCS
11	AHC-0239J	vise plate	虎鉗鋼板(EU168)		4	PCS
13	PDA-5-16	screw	丸頭內六角螺絲	M5xP0.8x16L	12	PCS
15	AHA-0122B	fixed bolt	固定螺絲(二)	M14x2.0xL20	4	PCS
17	PQA-16	spring washer	彈簧華司	Ø 16	4	PCS
19	AHC-0229	front fixed vise jaw	前固定虎鉗(一)		1	PCS
21	AHC-0223-NC	front movable vise jaw	前活動虎鉗		1	PCS
23	AHA-0227	auxiliary plate	輔助板(一)		3	PCS
27	C260L-3175	guide block	鋸臂連動擋板		1	PCS
29	PQA-8	spring washer	彈簧華司	Ø 8	2	PCS
31	PPA-8	washer	平面華司	Ø 8	2	PCS
33	PLA-8-30	bolt	外六角螺絲	N8x30L	4	PCS
35	PLA-14-45	bolt	外六角螺絲	M14x45L	4	PCS
37	PQA-14	spring washer	彈簧華司	M14	4	PCS
39	AHC-0224-NC	bracket	第一次自切定位板		1	PCS
41	PBA-8-30	bolt	有頭內六角螺絲	M8xP1.25x30L	3	PCS
47	C260L-23000-1	vise cylinder	虎鉗油缸組		1	PCS
51	AHC-1427-CE	stock receiving tray	托架		1	PCS
53	PBA-12-30	bolt	有頭內六角螺絲	M12xP1.75x30L	2	PCS
55	PQA-12	spring washer	彈簧華司	M12	2	PCS
57	AHC-1437	support	托架支持板		1	PCS
59	PBA-10-15	bolt	有頭內六角螺絲	M10xP1.5x15L	2	PCS
61	PQA-10	spring washer	彈簧華司	M10	2	PCS
63	PBA-6-15	bolt	有頭內六角螺絲	M6xP1.0x15L	2	PCS
65	PQA-6	spring washer	彈簧華司	M6	2	PCS
67	AHC-1424	right fence	托架右板		1	PCS
69	AHC-1423-CE	left fence	托架左板		1	PCS
71	PP-52044	nut	普利護蓋螺母		2	PCS
75	PBA-8-100	bolt	有頭內六角螺絲	M8xP1.25x100L	2	PCS
77	AGB-70220	bracket	冷卻水管固定板		1	PCS
79	PBA-5-12	bolt	有頭內六角螺絲	M5xP0.8x12L	2	PCS
81	PP-43136	valve	開關閥	A103 PT3/8	1	PCS
83	PP-57079	hose	出水管	3/8 25"	1	PCS
87	PPA-6-8	set screw	止付螺絲	M6x8L	1	PCS
89	AHA-0227S	auxiliary plate	床面輔助板		3	PCS

**PART D
WORK FEED BED ASSEMBLY**

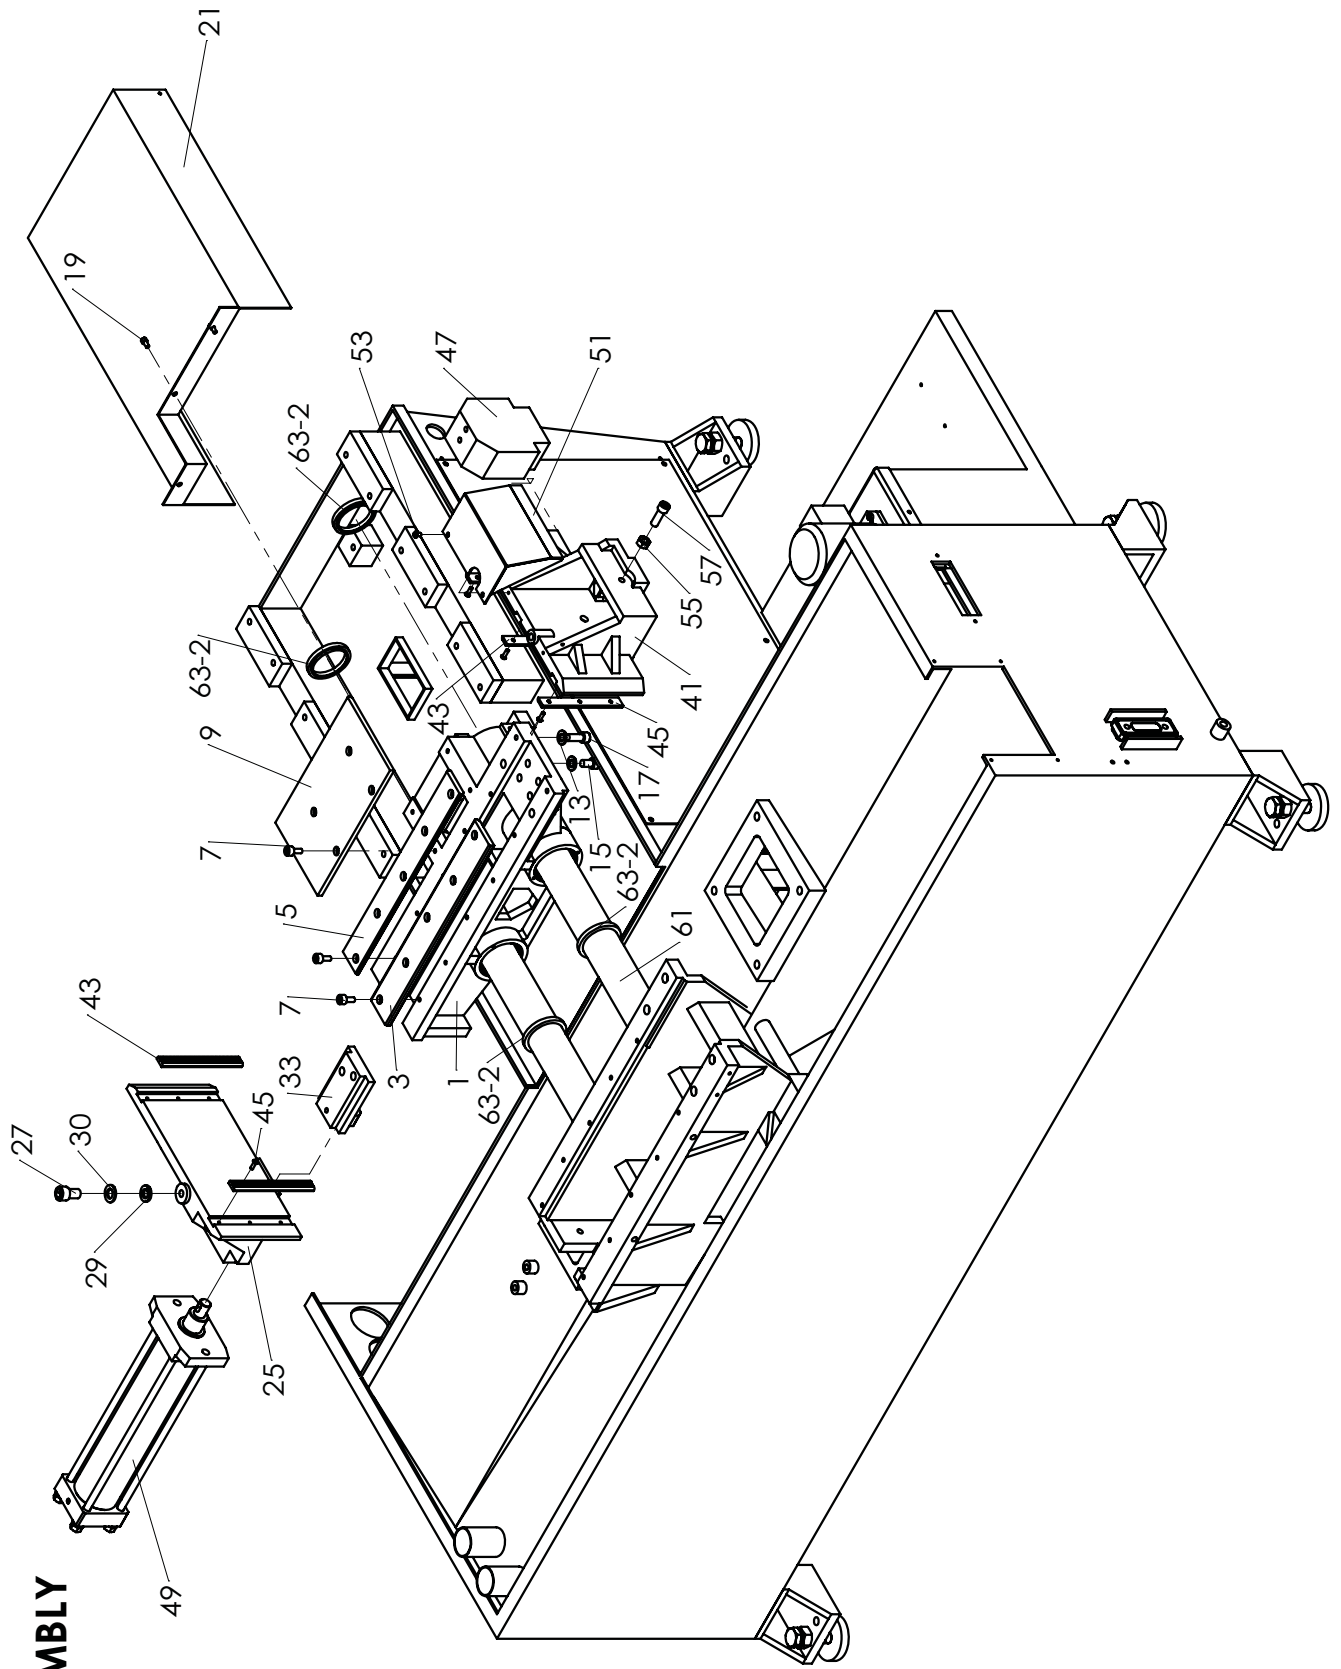


**PART D
WORK FEED BED ASSEMBLY**

ITEM	PART NO.	PART NAME	PART NAME (CH)	PART SPEC.	COUNT	UNIT
1	C260L-2011	feed vise bed	送料床面		1	PCS
3	C260L-2003	slide plate	床面鋼板(一)		1	PCS
5	C260L-2005	slide plate	床面鋼板(二)		1	PCS
7	PBA-8-20	bolt	內六角螺絲	M8xP1.25x20L	14	PCS
9	AHC-1524Y2	plate	遮板		1	PCS
11	AGC-2202T	rear fixed vise jaw	後固定虎鉗(單動)		1	PCS
13	PPA-12	washer	平面華司	Φ 12	2	PCS
15	PBA-12-20	bolt	有頭內六角螺絲	M12xP1.75x20L	1	PCS
17	PBA-12-30	bolt	有頭內六角螺絲	M12xP1.75x30L	1	PCS
19	AGC-1039	cylinder cover	送料軸護蓋		1	PCS
21	PBA-6-12	bolt	內六角螺絲	M6*12L	3	PCS
25	AHC-1520	rear movable vise jaw	後活動虎鉗		1	PCS
27	PBA-16-25	bolt	有頭內六角螺絲	M16xP2.0x25L	2	PCS
29	PQA-16	spring washer	彈簧華司	Φ 16	2	PCS
30	PPA-16	washer	平面華司	Φ 16	2	PCS
33	AHA-2310A-NC	vise body	虎鉗滑座		1	PCS
41	AGC-2202T	rear fixed vise jaw	後固定虎鉗(雙動虎鉗)		1	PCS
43	AHC-0239J	vise plate	虎鉗鋼板(EU168)		5	PCS
45	PDA-5-16	screw	丸頭內六角螺絲	M5xP0.8x16L	12	PCS
47	AGC-2200-1	rear fixed cylinder assembly	後固定虎鉗油缸組(雙動虎鉗)		1	PCS
49	C260L-23000-1	vise cylinder	虎鉗油缸組		1	PCS
51	AGC-2209B	cover	雙動虎鉗護蓋		1	PCS
53	PDA-6-10	screw	丸頭內六角螺絲	M6xP1.0x10L	2	PCS
55	POA-12-175	nut	螺母	M12xP1.75	1	PCS
57	PBA-12-30	bolt	有頭內六角螺絲	M12xP1.75x30L	1	PCS
61	C260L-2021	feed shaft	送料軸		2	PCS
63	AHC-02020A	feeding bed assebly	送料床面組		1	PCS
63-1	PP-13620	du bushing	乾式軸承	MB6540	4	PCS
63-2	PP-51146	dust seal	防塵套	65x79x8/11	4	PCS
67	AGC-2204	spacer	後虎鉗墊片		2	PCS

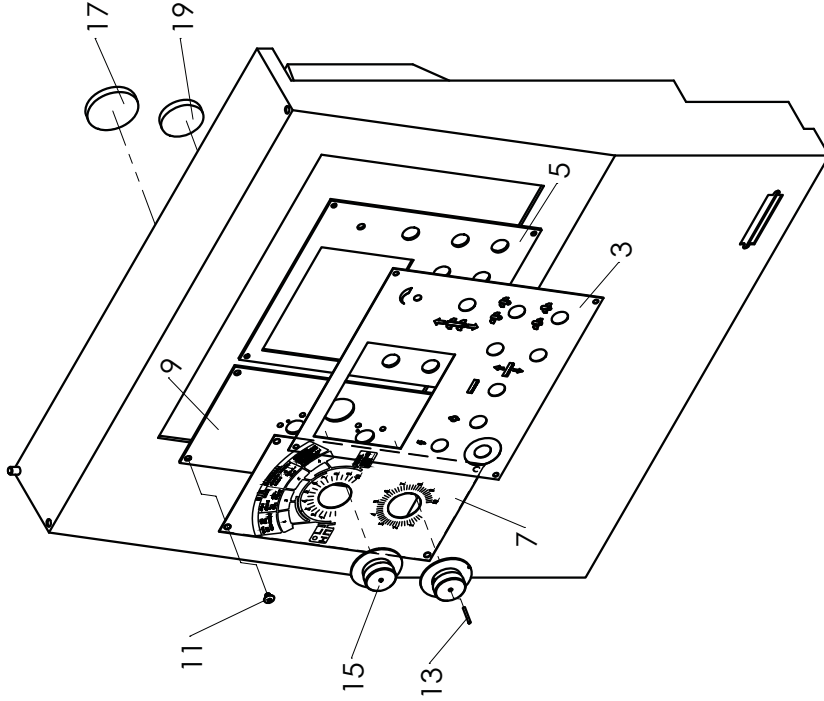**PART M
ELECTRIC BOX ASSEMBLY**


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
3	C260L-1321	control panel	控制面板	CS-222	1	PCS
5	C260L-1323	control plate	面板底板		1	PCS
7	AHC-0134A-CE	elec. data plate	流量閥控制面板	DIN CS-198	1	PCS
9	AHC-0135-CE	control plate	面板底板(二)		1	PCS
11	PFA-8-8	screw	丸頭螺絲(十字)(公)	M8x8L	8	PCS
13	PRA-3-26	spring pin	彈簧銷	SPP-3*26MM	2	PCS
15	AHA-1806	vernier dial	流量閥旋鈕		2	PCS
17	AHA-10289	regulator set	調壓閥整組		1	PCS
19	AHA-6100	flow control valve	流量控制閥		1	PCS


**PART A
MACHINE FOUNDATION ASSEMBLY**

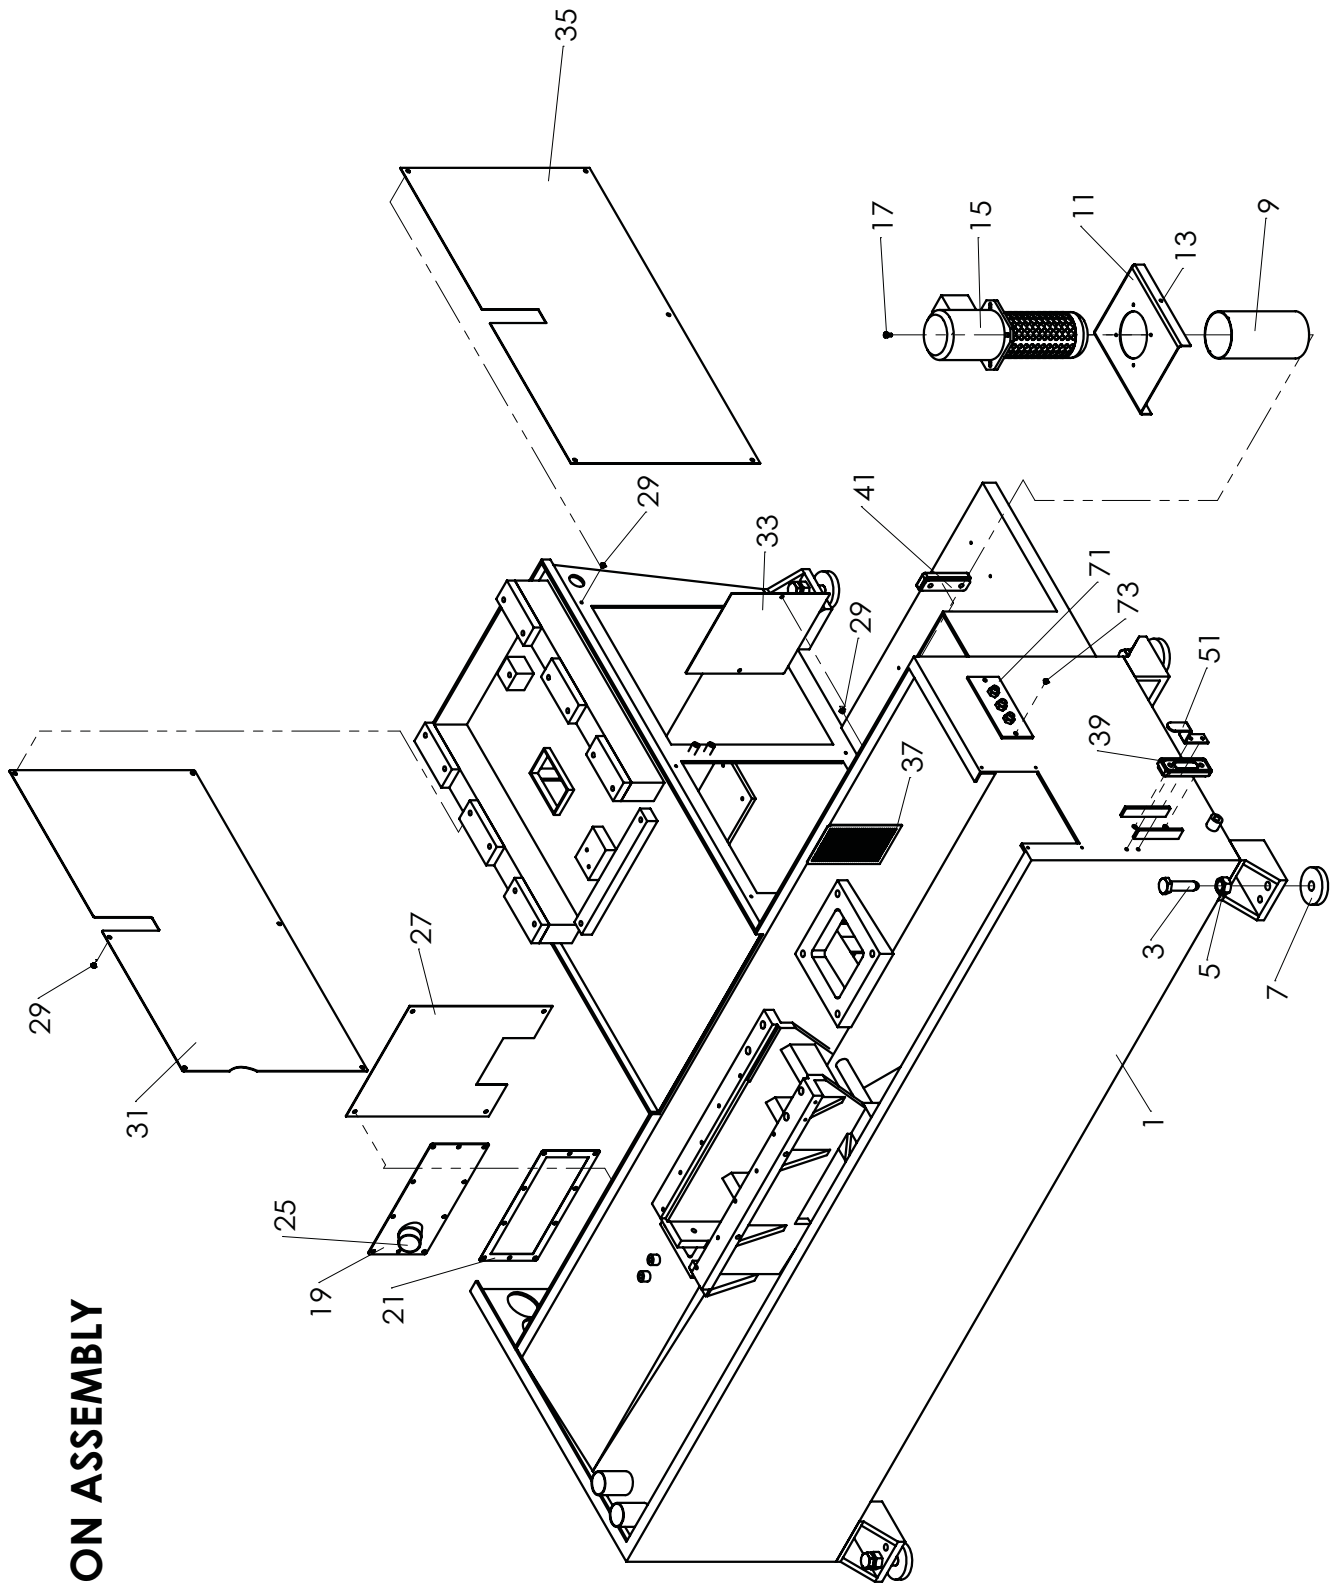

**PART A
MACHINE FOUNDATION ASSEMBLY**

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	C260L-1001A	base seat	底座		1	PCS
3	AHC-0153	adjusting bolt	底座調整螺桿	M20xP2.5xL80	6	PCS
5	POA-20-25	nut	螺母	M20xP2.5	6	PCS
7	AHR-1055	table stand pad	底座墊塊	Φ 80xD15	6	PCS
9	AHA-0131	filter	浸水泵浦濾網	40目濾網	1	PCS
11	AHA-0136	coolant pump cover	冷卻幫浦固定蓋		1	PCS
13	PDA-5-10	bolt	丸頭內六角螺絲(公)	M5xP0.8xL10	3	PCS
15	PP-32081	pump	浸水泵浦	1/8hp 3Ψ210L	1	PCS
17	PBA-6-10	hex soc cap screw	有頭內六角螺絲	M6xP1.0xL10	4	PCS
19	AHA-0102	oil tank cover	油箱蓋		1	PCS
21	AHA-0108	leak-proof asbestos	油箱蓋防漏海綿	配AHA-0102油箱蓋	1	PCS
23	PDA-6-10	bolt	丸頭內六角螺絲(公)	M6xP1.0xL10	10	PCS
25	PP-90857	cap	油箱蓋螺帽		1	PCS
27	AGC-1054	left rear ride cover	底座左後蓋		1	PCS
29	PDA-6-5	bolt	丸頭內六角螺絲(公)	M6xP1.0xL5	19	PCS
31	AGC-1052A	left rear side cover	底座後左邊蓋		1	PCS
33	AGC-1050A	right rear cover	底座右後蓋		1	PCS
35	AGC-1051A	right rear side cover	底座後右邊蓋		1	PCS
37	AHA-0139	filter	水箱通管濾網(小)		1	PCS
39	PP-21030	fluid level	油面計(含固定螺絲螺帽)	LS-3"	1	PCS
41	PP-21030A	fluid level	水面計(含固定螺絲螺帽)	LS-3"	1	PCS
51	AHA-1309	bracket	軟管架		1	PCS
71	AHG-0138	bracket	水管接頭座		1	PCS
73	PDA-6-10	screw	丸頭內六角螺絲(公)	M6xP1.0xL10	2	PCS

**PART B
MAIN SHAFT & SUB SHAFT ASSEMBLY**

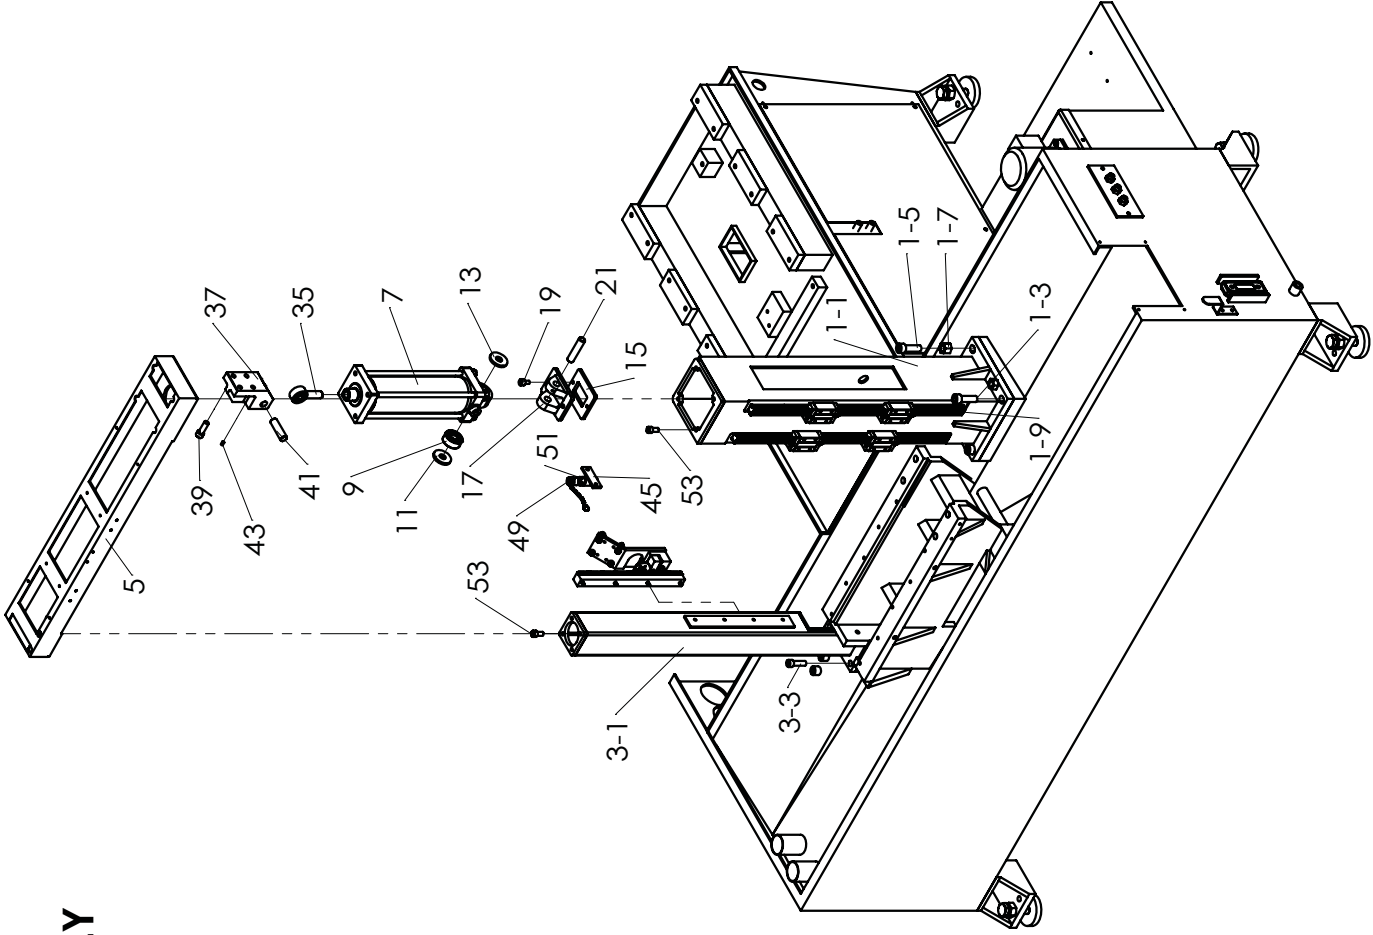




C2(C-260LNC) SERIES PART LIST

2018/10/24


PART B MAIN SHAFT & SUB SHAFT ASSEMBLY

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1-1	C260L-1101A	main shaft	大主軸		1	PCS
1-3	PBA-16-50	bolt	有頭內六角螺絲	M16P2.0x50L	3	PCS
1-5	AGC-1030	bolt	下限定位支撐		1	PCS
1-7	POA-16-20	nut	螺帽	M16xP2.0	1	PCS
1-9	PP-92020A	sliding block	滑軌滑塊	RBS25B2x650L/NZ1(勁亨ABBA)	2	PCS
3-1	C260L-1121A	sub shaft	小主軸	ZCK-M	1	PCS
3-3	PBA-12-40	bolt	有頭內六角螺絲	M5xP0.8x12L	3	PCS
5	C260L-1131A	cross link	主軸樑		1	PCS
7	C260L-32500-1	saw bow cylinder	鋸弓油壓缸組		1	PCS
9	PP-14510	bearing	軸承	2303	1	PCS
11	AHA-1105A	washer	活動軸墊圈		1	PCS
13	AHA-1105	washer	橡膠墊圈		1	PCS
15	AGC-1032	hydraulic holder plate	油壓缸固定板		1	PCS
17	AGC-1031	hydraulic holder	油壓缸固定座		1	PCS
19	PBA-8-16	bolt	有頭內六角螺絲	M8xP1.25x16L	2	PCS
21	AGB-70304B	pin	鋸弓油缸下插銷		1	PCS
23	C260L-21000	encoder assembly	高度譯碼器組		1	PCS
35	PP-14480	link bearing	連桿軸承	POS18	1	PCS
37	AGC-3011	cylinder upper ear	鋸弓油缸上耳		1	PCS
39	PBA-10-35	bolt	有頭內六角螺絲	M10xP1.5x35L	4	PCS
41	AGB-70304A	pin	鋸弓油缸上插銷		1	PCS
43	PAA-6-10	set screw	止付螺絲	M6xP1.0x10L	1	PCS
45	AGB-70220	coolant bracket	冷卻水管固定板		1	PCS
47	PBA-5-12	bolt	有頭內六角螺絲	M5xP0.8x12L	2	PCS
49	AHA-1932	dust seal	母防塵套		1	PCS
51	PP-21099	connect	快速接頭	1/4"	1	PCS
53	PBA-10-20	bolt	有頭內六角螺絲	M10xP1.25x20L	8	PCS

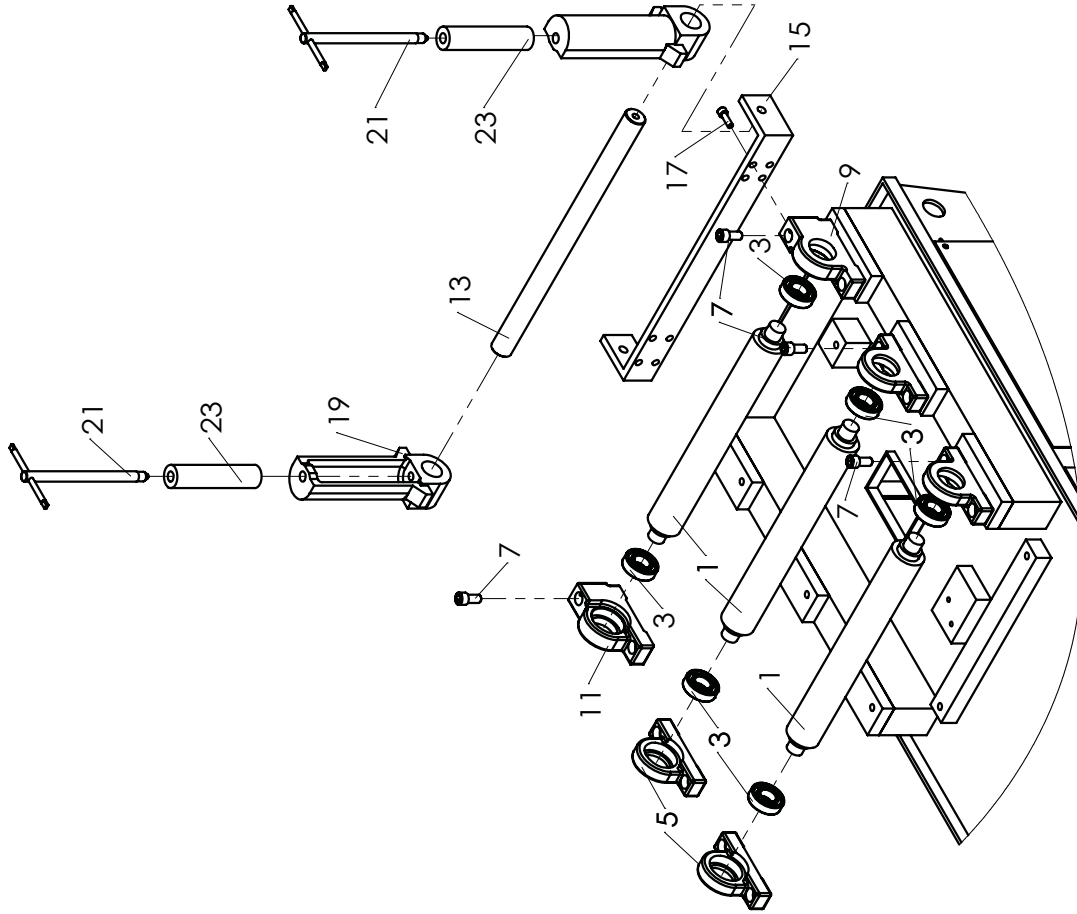


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHC-1625	roller	滾輪		2	PCS
3	PP-14275	bearing	軸承	6205ZZ	4	PCS
5	AHA-1636	roller bracket	滾輪固定座		2	PCS
7	PBA-12-25	bolt	有頭內六角螺絲	M12x25L	8	PCS
9	AHB-1653	right roller bracket	滾輪固定座(右)		1	PCS
11	AHB-1656	left roller bracket	滾輪固定座(左)		1	PCS
13	AHC-1662A	guide bar	側滾輪固定軸		1	PCS
15	AHC-1675A	stopper plate	側滾輪擋板		1	PCS
17	PBA-8-25	bolt	有頭內六角螺絲	M8x25L	4	PCS
19	OPR-5015A	side roller seat	側滾輪座	157L	2	PCS
21	OPR-5014A	shaft	側滾輪軸及把手		2	PCS
23	OPR-5013A	sside roller	側滾輪	150L	2	PCS

ITEM	PART NO	PART NAME	PART NAME IN CHINESE	QTY
1	C260L-1301	Electrical box	電器箱	1
2	C260L-1401A	Left base plate	左底盤	1
3	C260L-1403A	Right base plate	右底盤	1
4	C260L-1407A	Left front cover	左前罩	1
5	C260L-1409A	Right front cover	右前罩	1
6	C260L-1411A	Left rear housing	左後罩	1
7	C260L-1411A-1	Left bracket	左支架	2
8	C260L-1411A-2	Left fixed plate	左固定板	1
9	C260L-1411A-3	Left rear cover	左後蓋	1
10	C260L-1413A	Left side door	左側門	1
11	C260L-1417A	Right rear housing	右後罩	1
12	C260L-1417A-1	Right bracket	右支架	1
13	C260L-1417A-2	Right fixed plate	右固定板	1
14	C260L-1417A-3	Right rear cover	右後蓋	1
15	C260L-1419A	Right side door	右側門	1
16	C260L-1421	Cover limit plate	護蓋限動板	2
17	C260L-1431A	Rear cover connection plate	後罩連接板(一)	1
18	C260L-1435A	Left rear housing cover	左後罩護蓋	1
19	C260L-1437A	Right rear housing cover (1)	右後罩護蓋(一)	1
20	C260L-1439A	Right rear housing cover (2)	右後罩護蓋(二)	1
21	C260L-1441A	Right rear housing cover (3)	右後罩護蓋(三)	1
22	C260L-1443A	Left rear bracket	左後支撐架	1
23	C260L-1445A	Right rear bracket	右後支撐架	1
24	C260L-1447A	Bracket	支撐架	1

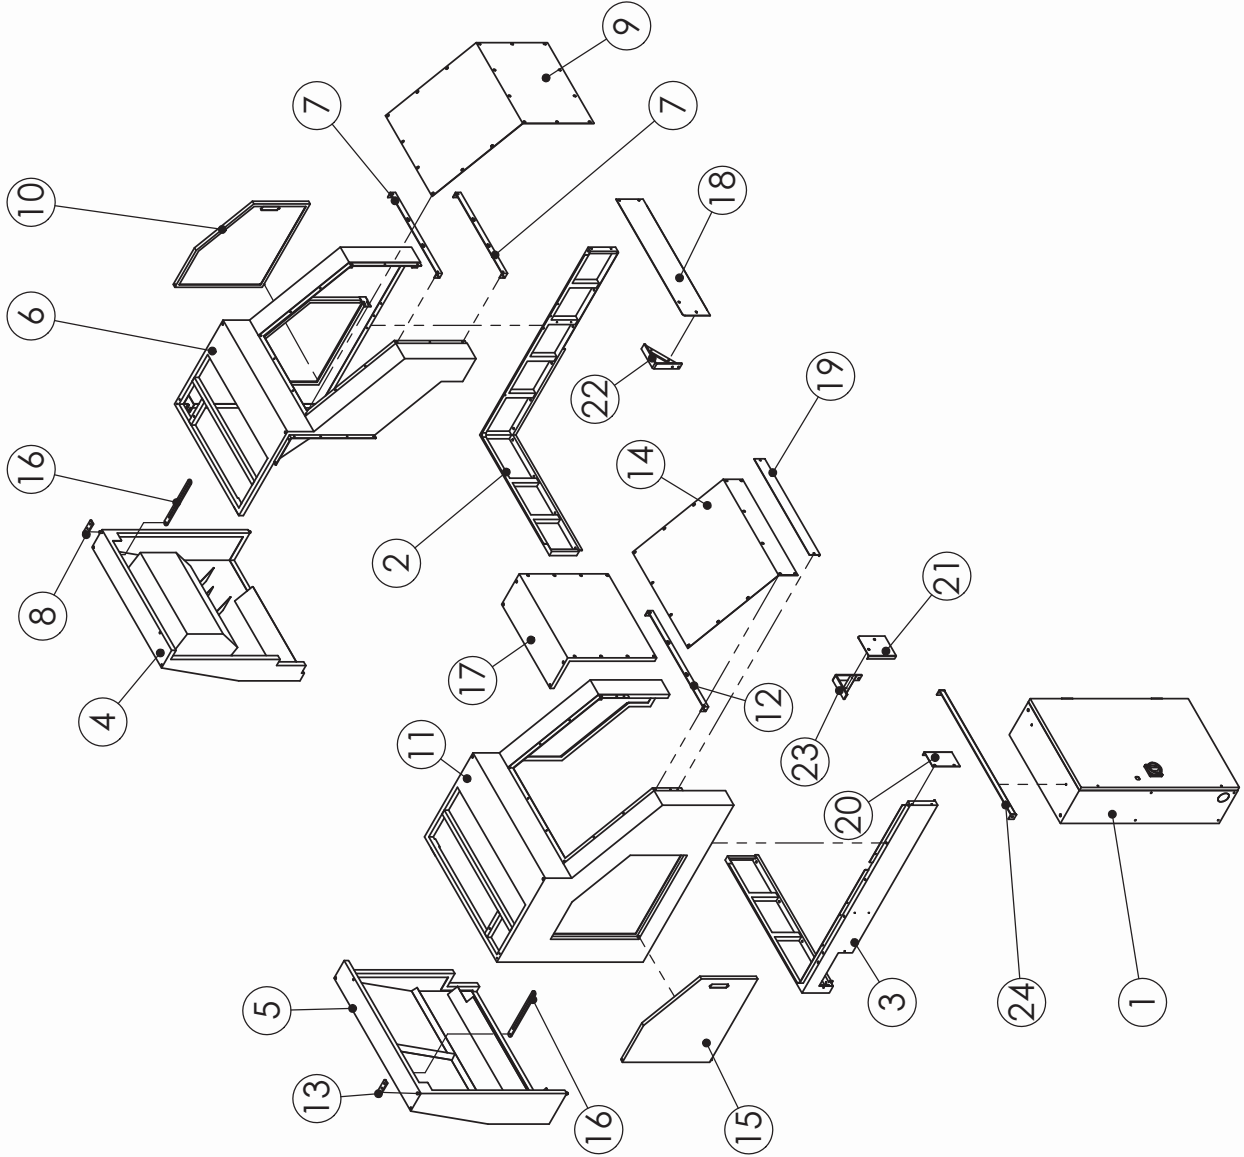


PART B1
ENCODR ASSEMBLY
PART NO: C260L-21000

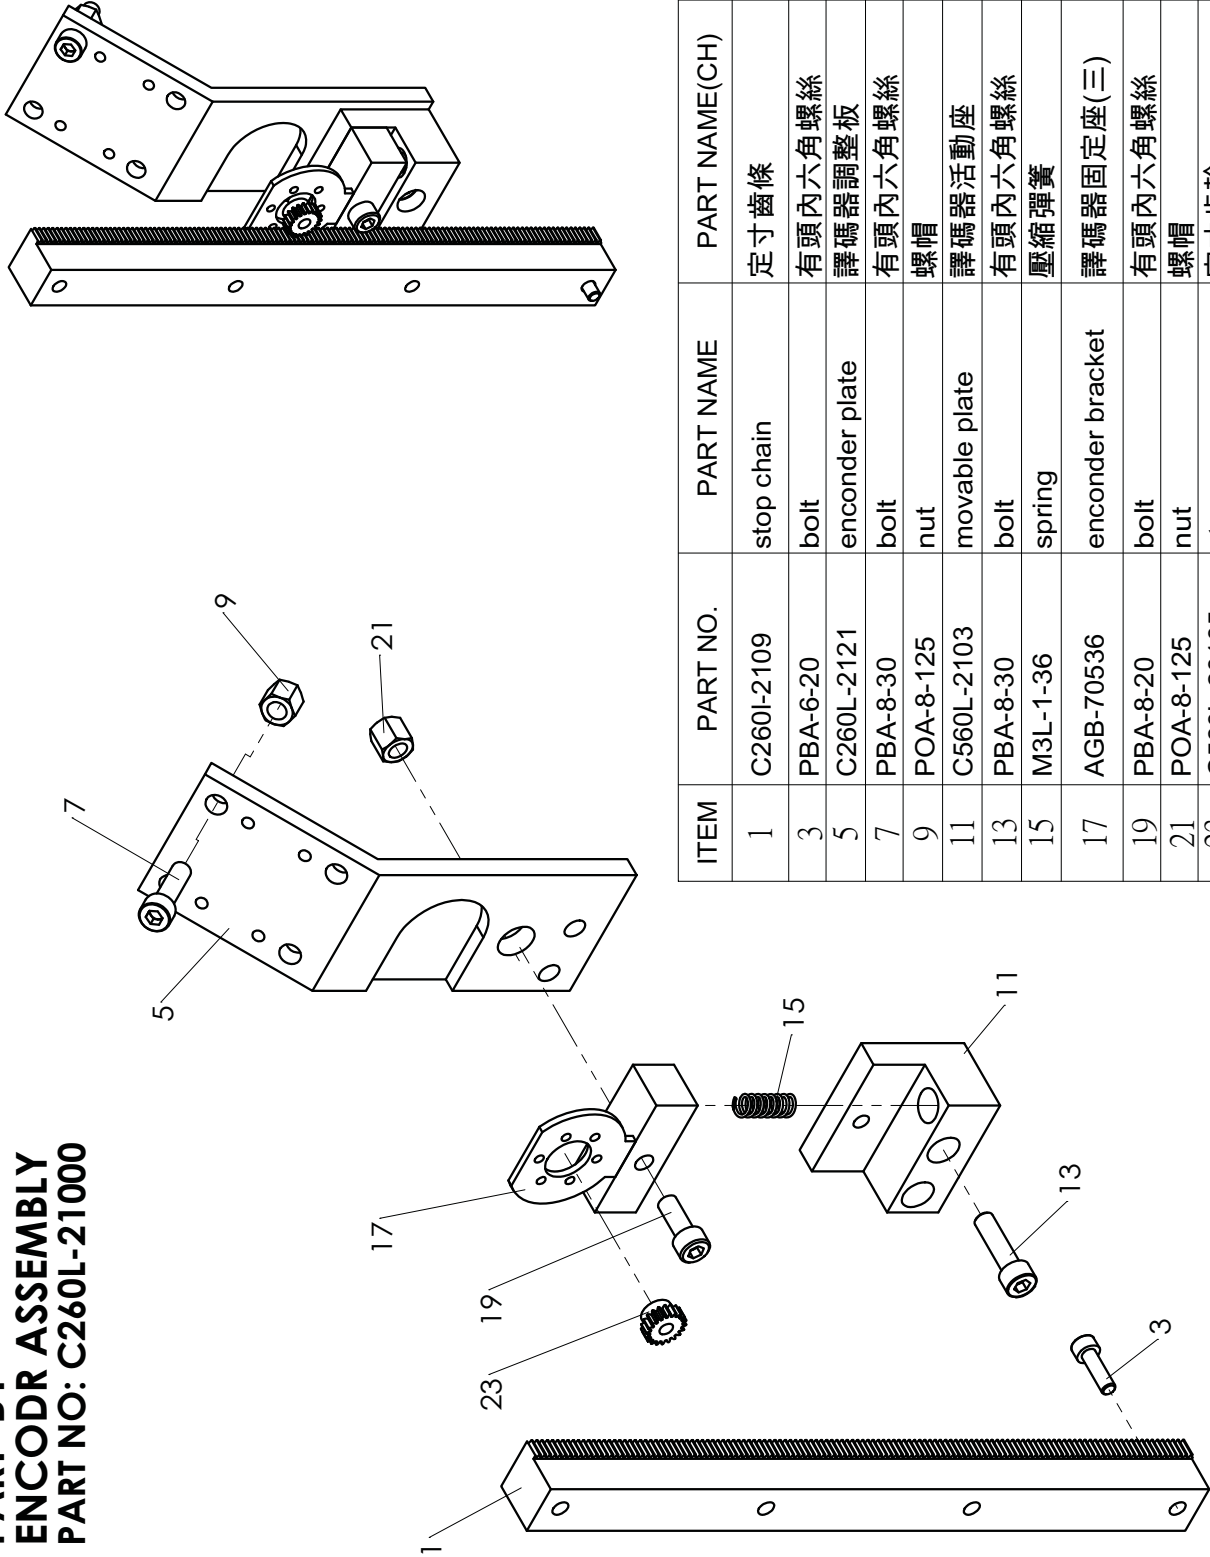

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	C260I-2109	stop chain	定寸齒條		1	PCS
3	PBA-6-20	bolt	有頭內六角螺絲	M6xP1x20L	4	PCS
5	C260L-2121	encoder plate	譯碼器調整板		1	PCS
7	PBA-8-30	bolt	有頭內六角螺絲	M8xP1.25x30L	4	PCS
9	POA-8-125	nut	螺帽	M8	4	PCS
11	C560L-2103	movable plate	譯碼器活動座		1	PCS
13	PBA-8-30	bolt	有頭內六角螺絲	M8xP1.25x30L	2	PCS
15	M3L-1-36	spring	壓縮彈簧		1	PCS
17	AGB-70536	encoder bracket	譯碼器固定座(三)		1	PCS
19	PBA-8-20	bolt	有頭內六角螺絲	M8xP1.25x20L	2	PCS
21	POA-8-125	nut	螺帽	M8	2	PCS
23	C560L-20105	stop gear	定寸齒輪		1	PCS

C2後下壓組立爆炸圖/ C2 Front Top Clamp					
C260L-24000-B					
項次編號 NO.	品號PART NO.	PART NAME	零件名稱	PART SPEC	數量QTY
1	AHC-1924	Clamping block	下壓板		1
2	AHC-1926	Sliding block	下壓滑板		2
3	AHC-1912	Adjusting rod	下壓調整螺桿		1
4	AHA-1908	Pushing rod	推把		1
5	AHA-1923	Adjusting handwheel	調整手輪		1
6	PRA-3-10	Spring pin	彈簧銷	∅ 3X10	1
7	POA-10-15B	Nut	螺母	10MM	1
8	PAA-8-20	Set screw	止付螺絲	M8X20	1
9	PBA-8-20	Hex head cap screw	有頭內六角螺絲	M8X20	7
10	PQA-10	Spring washer	彈簧墊片	M10	1
11	PP-52093	S20 snap ring	S20扣環		1
12	AHC-1904	Front top clamp cylinder seat	前下壓虎鉗油缸座		1
13	PP-13149	2608 DU bushing	2608乾式軸承		1
14	AHA-1925	Clamping tube	下壓缸管		1
15	AHA-1917	Piston	活塞		1
16	AHA-1915A	Back cover	後蓋		1
17	PP-5910	O-ring	O行環		1
18	PP-59101	O-ring	O行環		1
19	PP-59585	O-ring	O行環		1
20	AHA-1919	Spring	彈簧		1
21	PP-13149	2608 DU bushing	2608乾式軸承		1
22	PHD-02D-600	Oil pipe	油管		1
23	PP-21100	Tube fitting	快速接頭		1
24	C260L-2431	Fixed bolt	固定螺栓		2
25	PPA-14A	Flat washer	平面華司	M14	2
26	POA-14-20	Nut	螺母	M14	2
27	PUI-020-0202	Stright connector	直接頭	1/4*1/4P	2

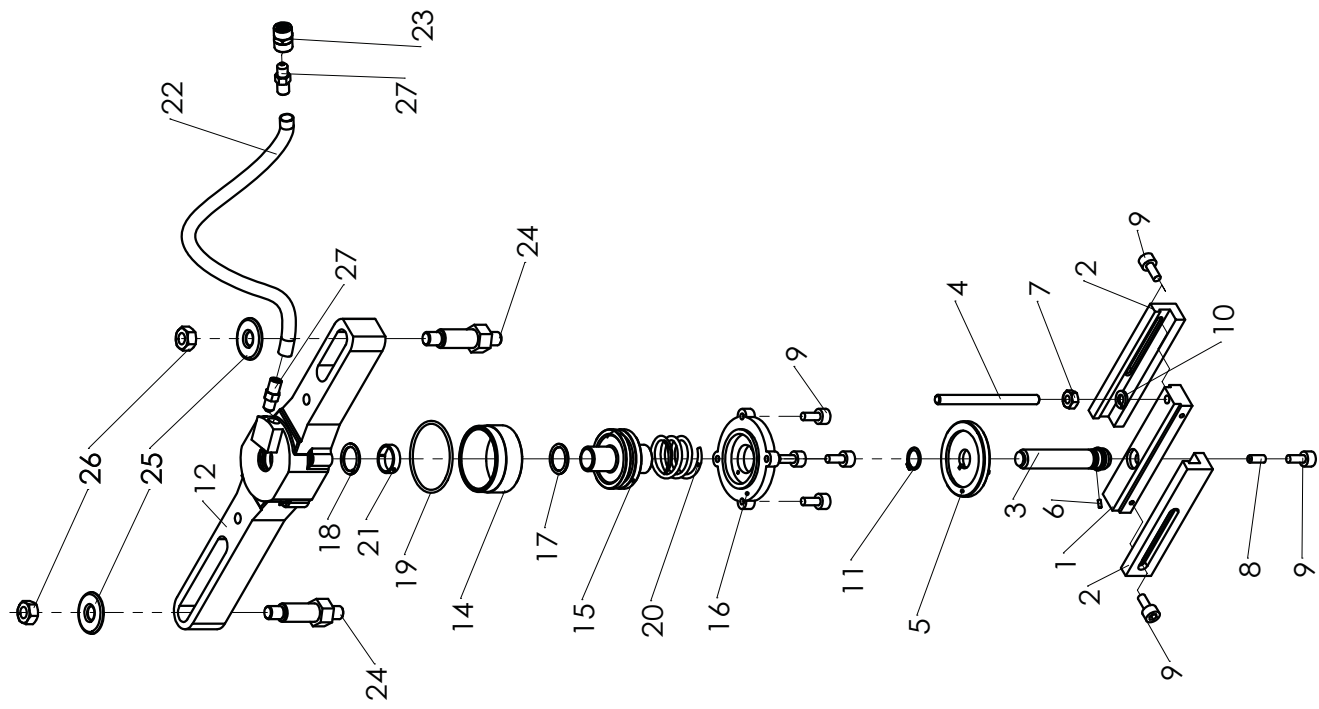


PART T FRONT TOP CLAMP

C2(C-260LNC) SERIES PART LIST

C2前下壓組立爆炸圖/ C2 Front Top Clamp

C260L-24000-F

項次編號 NO.	品號PART NO.	PART NAME	零件名稱	PART SPEC	數量QTY
1	AHC-1924	Clamping block	下壓板		1
2	AHC-1926	Sliding block	下壓滑板		2
3	AHC-1912	Adjusting rod	下壓調整螺桿		1
4	AHA-1908	Pushing rod	推把		1
5	AHA-1923	Adjusting handwheel	調整手輪		1
6	PRA-3-10	Spring pin	彈簧銷	Φ 3X10	1
7	POA-10-15B	Nut	螺母	10MM	1
8	PAA-8-20	Set screw	止付螺絲	M8X20	1
9	PBA-8-20	Hex head cap screw	有頭內六角螺絲	M8X20	7
10	PQA-10	Spring washer	彈簧墊片	M10	1
11	PP-52093	S20 snap ring	S20扣環		1
12	AHC-1904	Front top clamp cylinder seat	前下壓虎鉗油缸座		1
13	PP-13149	2608 DU bushing	2608乾式軸承		1
14	AHA-1925	Clamping tube	下壓缸管		1
15	AHA-1917	Piston	活塞		1
16	AHA-1915A	Back cover	後蓋		1
17	PP-5910	O-ring	O行環		1
18	PP-59101	O-ring	O行環		1
19	PP-59585	O-ring	O行環		1
20	AHA-1919	Spring	彈簧		1
21	PP-13149	2608 DU bushing	2608乾式軸承		1
22	PHD-02D-600	Oil pipe	油管		1
23	PP-21100	Tube fitting	快速接頭		1
24	C260L-2431	Fixed bolt	固定螺栓		2
25	PPA-14A	Flat washer	平面華司	M14	2
26	POA-14-20	Nut	螺母	M14	2
27	PUI-020-0202	Stright connector	直接頭	1/4*1/4P	2

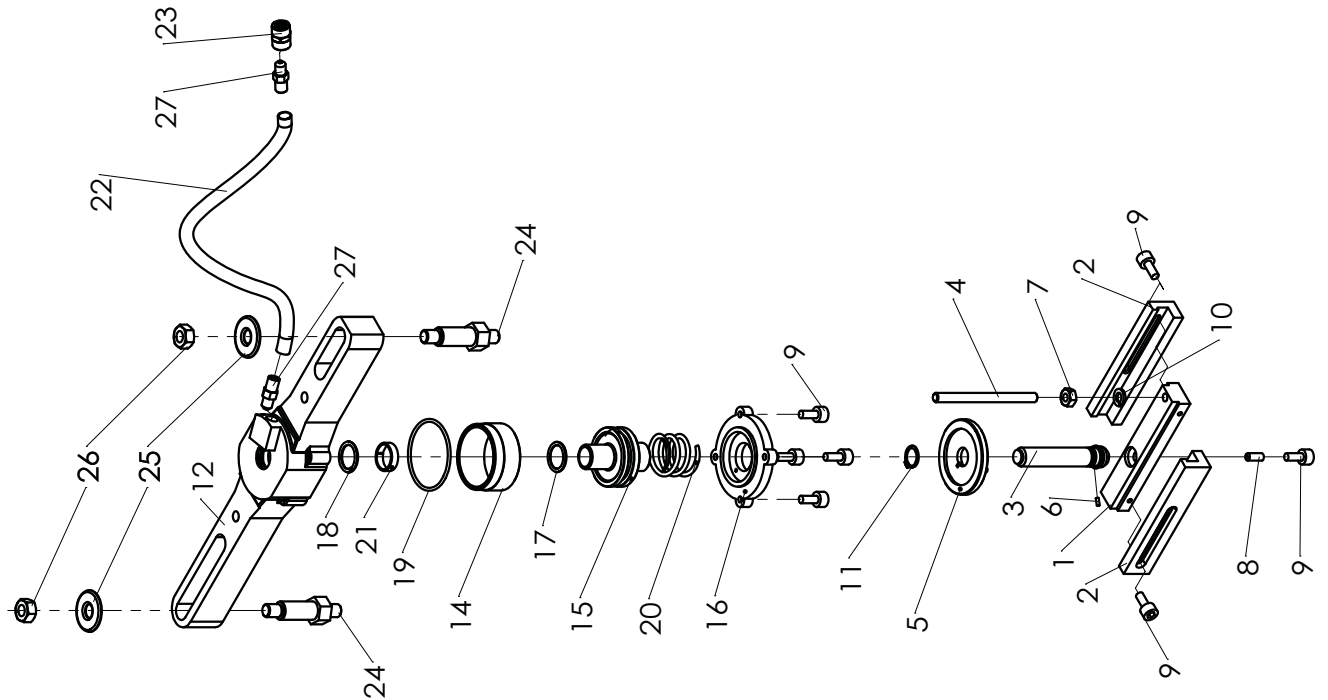


PART J
GUIDE BRACKET ASSEMBLY


C2(C-260LNC) SERIES PART LIST




ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	PP-92024	sliding block	滑軌滑塊	BRS25B1x450L/NZ1 (勁亨ABBA)	1	PCS
2	C260L-3167	saw arm front stopper	鋸臂前擋		1	PCS
3	C260L-3102	plate	滑板調整板		1	PCS
4	PBA-10-50	hex soc cap screw	有頭內六角螺絲	M10x50L	1	PCS
11-1	AHA-1753A	quick approach bar	急降桿		1	PCS
11-3	AHA-1755C	quick approach stopper	急降桿檔板		1	PCS
11-5	PCA-6-10	bolt	平頭內六角螺絲	M6x10L	2	PCS
11-7	AHA-1752	quick approach fixed seat	急降桿固定座		1	PCS
11-8	C260L-3211	quick approach fixed seat	急降桿固定座(50W)		1	PCS
11-9	AHA-1754	cover plate	急降桿座蓋		1	PCS
11-11	PBA-6-20	hex soc cap screw	有頭內六角螺絲	M6x20L	4	PCS
11-13	PP-53010	knob screw	梅花螺絲	M8x20L	1	PCS
11-15	PQA-6	spring washer	彈簧華司	M6	6	PCS
11-16	PPA-6	washer	平面華司	M6	6	PCS
11-17	PBA-6-12	hex soc cap screw	有頭內六角螺絲	M6x12L	6	PCS
11-19	AHA-1756	limit block	限位開關座		1	PCS
11-21	PBA-6-40	hex soc cap screw	有頭內六角螺絲	M6x40L	2	PCS
11-23	POA-6	nut	螺帽	M6	1	PCS
15	PBA-5-25	hex soc cap screw	有頭內六角螺絲	M5x25L	2	PCS
17	C260L-3105	right guide bracket	固定右鋸臂		1	PCS
25	AHA-07480	right insert holder set	右導輪座組	(1 1/4")	1	PCS
27	AHA-0719	plain washer	導輪座墊片		1	PCS
29	PBA-12-40	hex soc cap screw	有頭內六角螺絲	M12x40L	4	PCS
31	AHA-0745	coolant nozzle	冷卻水噴嘴		1	PCS
33	PBA-5-8	hex soc cap screw	有頭內六角螺絲	M5x8L	1	PCS
35	MJA-2041	bracket	水龍頭座板		1	PCS
37	PP-43132	coolant valve	開關閥(無頭)	1/8"	2	PCS
39	PBA-5-8	hex soc cap screw	有頭內六角螺絲	M5*8L	2	PCS
41	C260L-3103	left guide bracket	活動鋸臂		1	PCS
42	C260L-3128	stopper plate	檔板		1	PCS
42-1	PCA-6-10	crop hexagram screw	平面內六角螺絲	M6x10L	2	PCS
43	AHA-07120	left insert holder set	左導輪座組		1	PCS
45	PP-13045	bearing	乾式軸承	1415	1	PCS
47	C560L-3173	Rings	連動擋輪套環		1	PCS
49	C560L-3171	feedler	鋸臂連棟擋輪		1	PCS
51	PBA-10-35	bolt	有頭內六角螺絲	M0x35L	1	PCS
53	PP-91804E	Work light	工作燈	JL-35 12RNTM110V20W	1	PCS

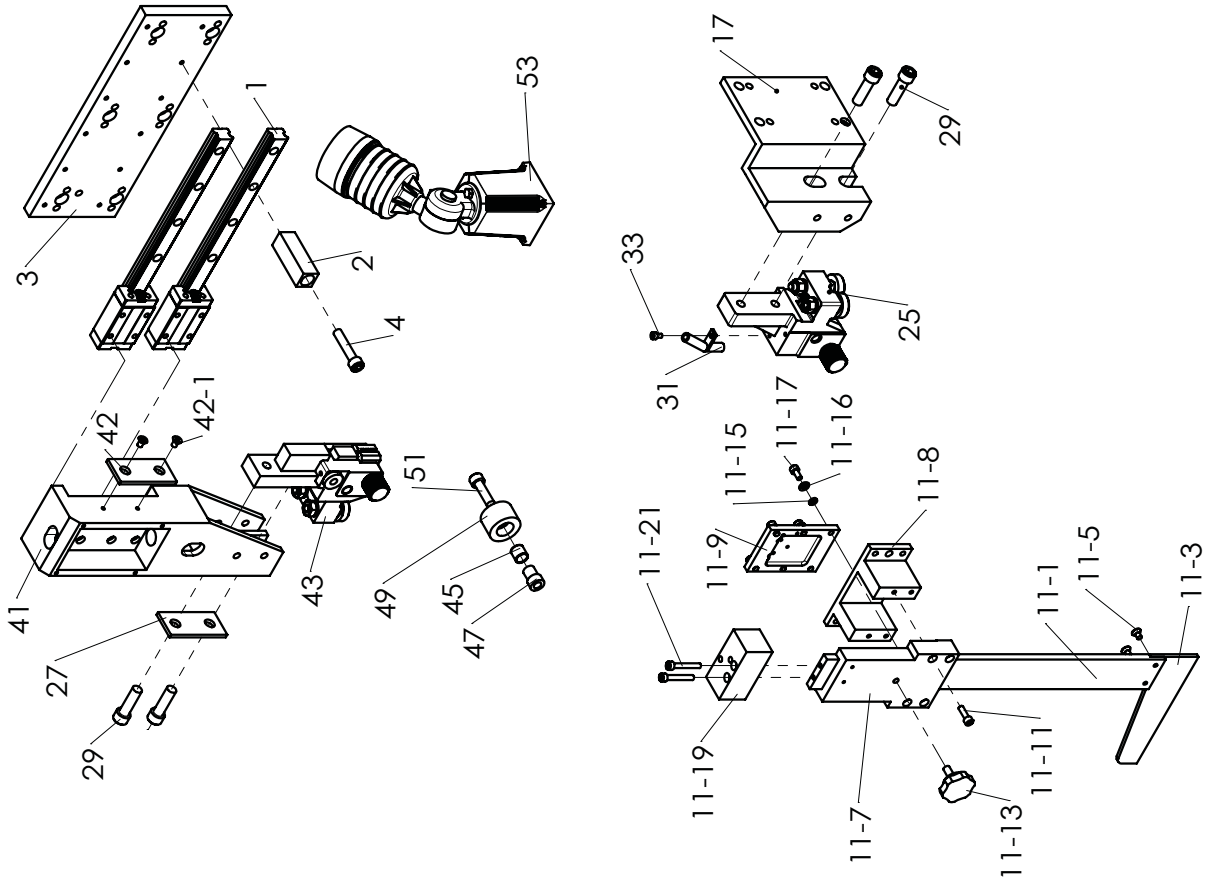

PART K WIRE BRUSH ASSEMBLY

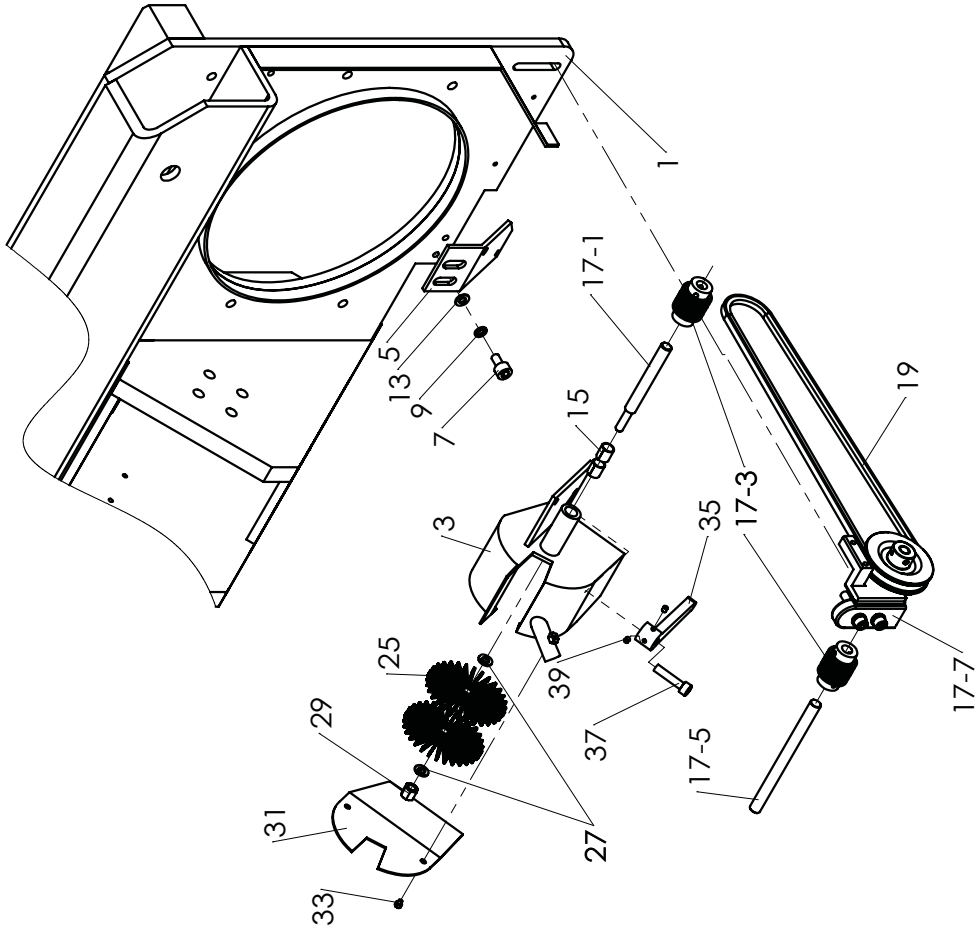


ITEM	PART NO.	PART NAME	PART NAME (CH)	PART SPEC	COUNT	UNIT
1	C260I-3001A	saw bow	鋸弓		1	PCS
3	AGC-3025	brush cover	鋼刷護蓋		1	PCS
5	AGC-3027	brush bracket	鋼刷護蓋固定板		1	PCS
7	PBA-8-16	bolt	有頭內六角螺絲	M8x16L	3	PCS
9	PQA-8	spring washer	彈簧華司	M8	3	PCS
11	POA-8	nut	螺帽	M8	3	PCS
13	PPA-8	washer	平面華司	M8	2	PCS
15	PP-13025	du bearing	乾式軸承	1215	2	PCS
17-1	AHB-0519	brush shaft	鋼刷軸		2	PCS
17-3	PP-15010	universal joint	萬向接頭	12M/M日本製(加防塵套)	2	PCS
17-5	AGC-3026	shaft	鋼刷傳動桿		1	PCS
17-7	AHA-12110-1	wire brush bearing seat assembly	鋼刷軸承座組 (市購件)		1	PCS
19	PP-56509	belt	皮帶	M36	1	PCS
25	PP-58002	wire brush	鋼刷	90m/m*8m/m#0.3	2	PCS
27	PPA-8	washer	平面華司	M8	2	PCS
29	POA-8	nut	螺帽	M8	1	PCS
31	AHA-1220-2	brush cover plate	鋼刷護蓋板		1	PCS
33	PBA-4-4	bolt	有頭內六角螺絲	M4x4L	2	PCS
35	AHA-1217	lock lever	鋼刷調整桿		1	PCS
37	PBA-8-35	bolt	有頭內六角螺絲	M8x35L	1	PCS
39	PPA-5-6	set screw	止付螺絲	M5x6L	2	PCS

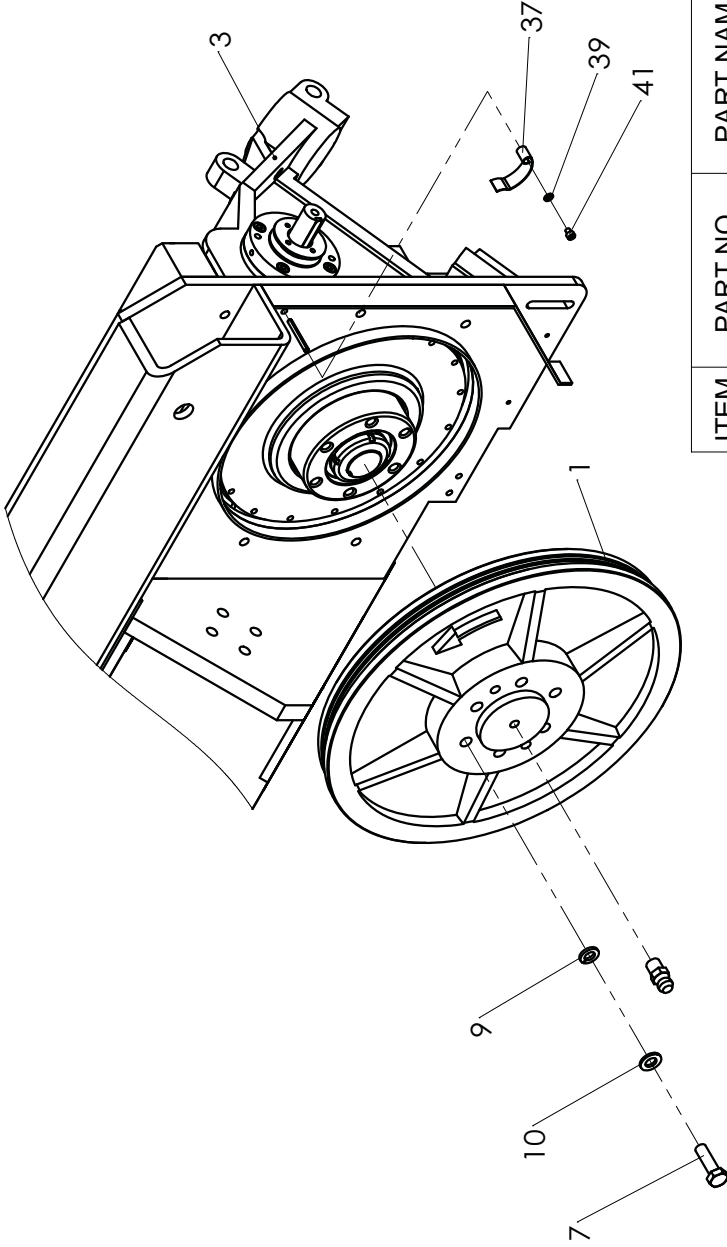


ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-0416B	drive wheel	下輪		1	PCS
3	AGC-03040	gear box	減速機整組		1	PCS
7	PLA-12-40	bolt	外六角螺絲	M12x40L	6	PCS
9	PQA-12	spring washer	彈簧華司	M12	6	PCS
10	PPA-12	washer	平面華司	M12	6	PCS
11	PUC-005	grease nipple	油嘴	1/16"	1	PCS
25	AHN-1519-CE	L.S bracket	右輪箱閉關座	CE機台用	1	PCS
27	PBA-5-10	bolt	有頭內六角螺絲	M5x10L	1	PCS
35	PRA-5-60	spring pin	彈簧銷	Φ 5x60L	1	PCS
37	AHA-0414	plate	鋸片安裝輔助板		1	PCS
39	PPA-5	washer	平面華司	M5	1	PCS
41	PBA-5-6	bolt	有頭內六角螺絲	M6x60L	1	PCS

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
3	AHA-0514G	reducer pulley	減速機皮帶輪(無段)		1	PCS
5	MAE-2025	washer	上輪軸墊圈	上輪軸墊圈0.01Kg	1	PCS
7	AHA-0525	washer	墊圈		2	PCS
9	PQA-10	spring washer	彈簧華司	M10	1	PCS
10	PPA-10	washer	平面華司	M10	1	PCS
11	PBA-10-30	bolt	有頭內六角螺絲	M10x30L	1	PCS
13	PP-56287	belt	皮帶	B-44	1	PCS
27	AHR-2027	motor base plate	馬達底板		1	PCS
29	AHA-0515	movable bar	馬達活動軸		1	PCS
31	PQA-12	spring washer	彈簧華司	M12	2	PCS
32	PPA-12	washer	平面華司	M12	2	PCS
33	POA-12-175	nut	螺帽	M12	2	PCS
35	AHA-0526	set pipe	馬達定位軸		1	PCS
37	PPA-10	washer	平面華司	M10	1	PCS
39	PQA-10	spring washer	彈簧華司	M10	6	PCS
41	PBA-10-25	bolt	有頭內六角螺絲	M10x25L	1	PCS
43	PP-31090	motor	馬達	5HP	1	PCS
45	AHA-0538G	motor pulley	馬達皮帶輪(無段)		1	PCS
47	PBA-10-50	bolt	有頭內六角螺絲	M10x50L	1	PCS
51	AHA-0510B	bracket	馬達底板耳		2	PCS

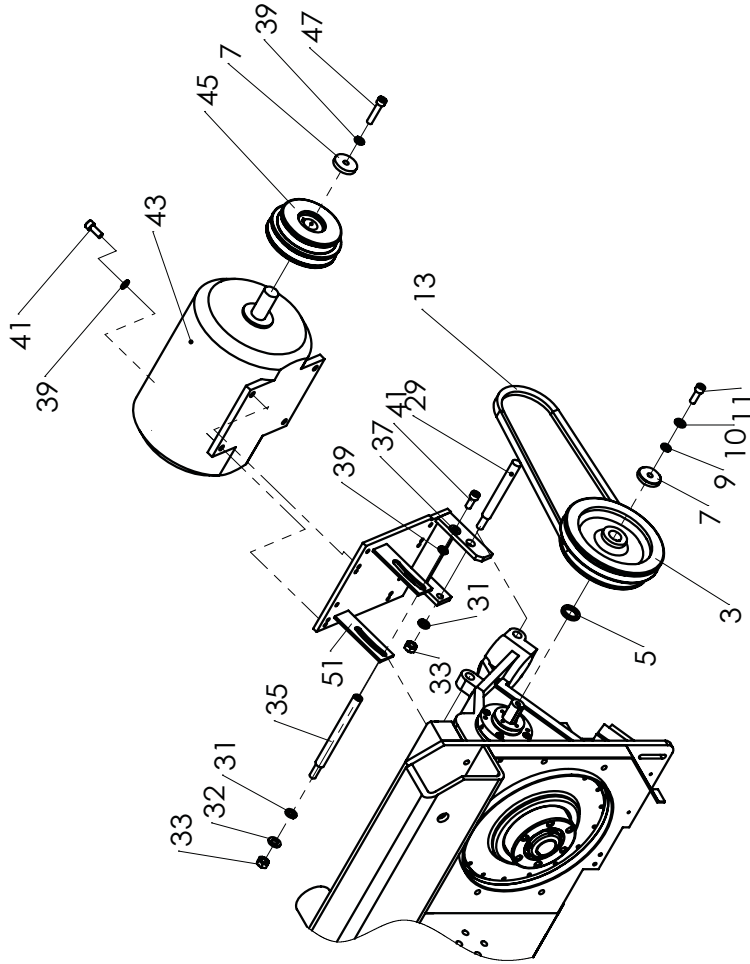


PART E FEED EQUIPMENT & FEED CYLINDER ASSEMBLY

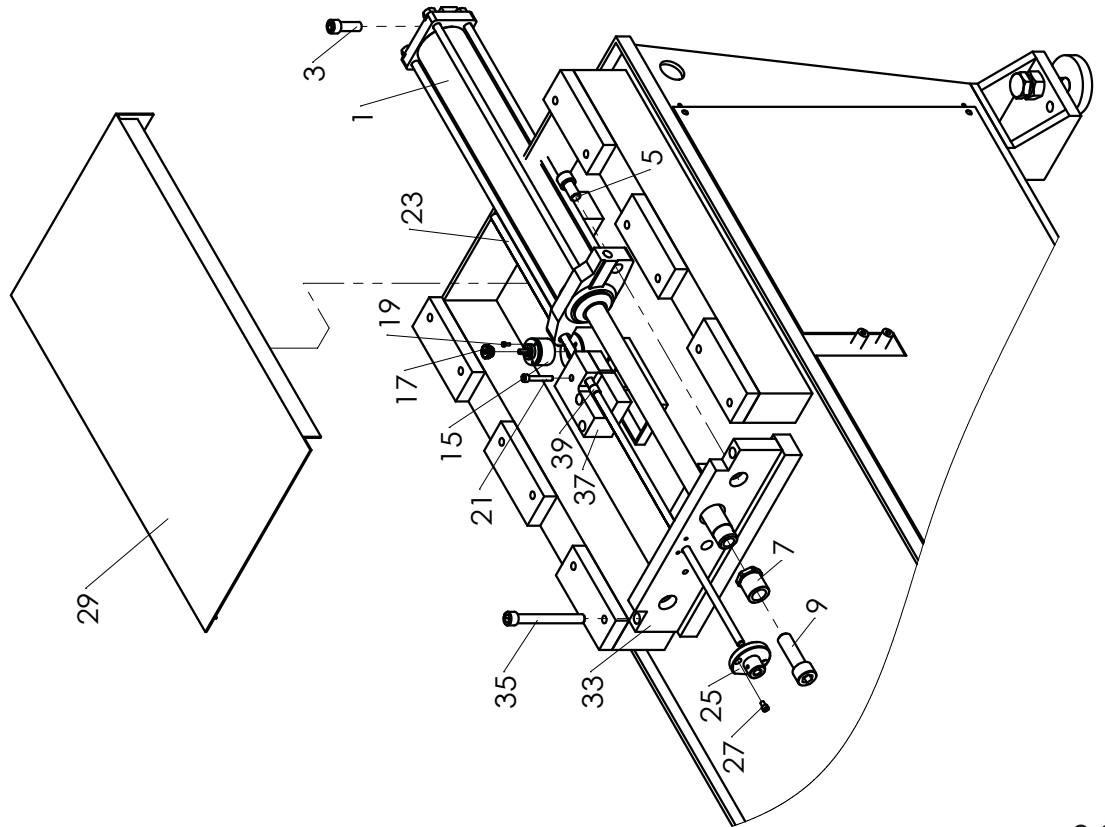

ITEM	PART NO.	PART NAME	PART NAME(CH)	PART SPEC.	COUNT	UNIT
1	AHA-16019-1	feed cylinder	送料油壓缸		1	PCS
3	PBA-12-30	bolt	內六角螺絲	M12*30L	1	PCS
5	PBA-14-25	bolt	內六角螺絲	M14*25L	2	PCS
7	AHA-1605	bush bolt	襯套螺帽		1	PCS
9	PBA-18-60	bolt	內六角螺絲	M18*60L	1	PCS
11	AHA-1563	encoder bracket	譯碼器固定座		1	PCS
13	AHA-1562	movable plate	譯碼器活動板		1	PCS
15	PP-90492	encoder	譯碼器	LBT-002-2000	1	PCS
17	AHA-1560	stop gear	定寸齒輪		1	PCS
19	PBA-3-8	bolt	內六角螺絲	M3*8L	3	PCS
21	PBA-6-40	bolt	內六角螺絲	M6*40L	1	PCS
23	AHA-1561-1	stop chain	定寸齒條		1	PCS
25	AHA-1564	encoder bracket(2)	齒排固定座(二)		1	PCS
27	PBA-5-10	bolt	內六角螺絲	M5*10L	2	PCS
29	AGC-1308A	Cylinder cover	送料油壓缸護蓋		1	PCS
33	AHC-1654A	set plate	送料軸固定板		1	PCS
35	PBA-12-110	bolt	內六角螺絲	M12*110L	2	PCS
37	M3L-9-10	spring	彈簧		1	PCS
39	PP-13020	du bushing	乾式軸承	1012	2	PCS

PART N
CHIP CONVEYOR ASSEMBLY(OPTIONAL)
PART NO: C360L-C001

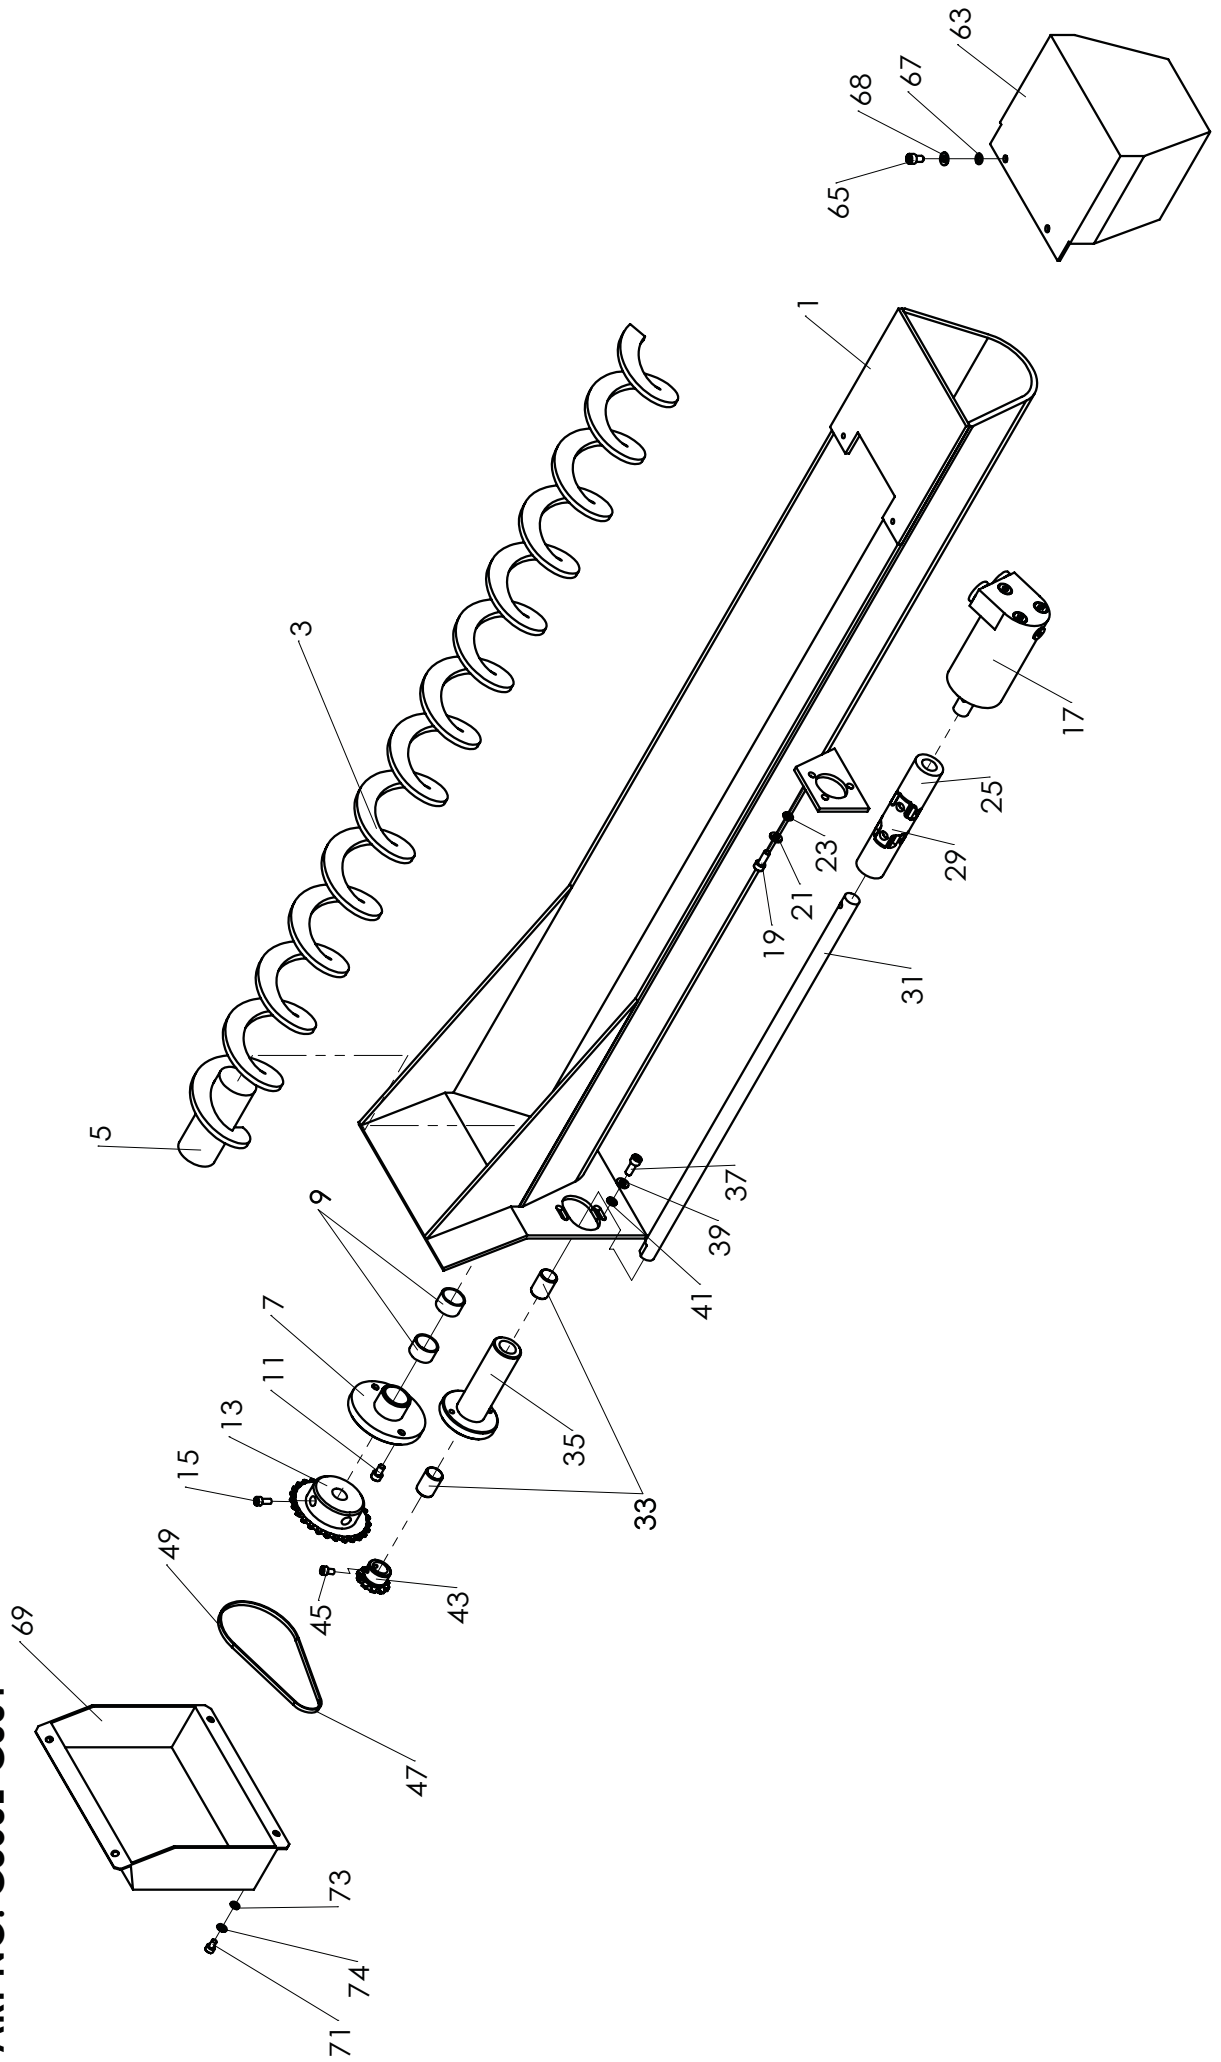




C2(C-260LNC) SERIES PART LIST

2018/10/24

PART N CHIP CONVEYOR ASSEMBLY(OPTIONAL) PART NO: C360L-C001

ITEM	PART NO.	PART NAME	PART NAME (CH)	PART SPEC.	COUNT	UNIT
1	C360L-4001	basket	切屑槽		1	PCS
3	AGF-1027	leader screw	除屑螺旋		1	PCS
5	AHN-1416A	rod	除屑螺桿		1	PCS
7	AHN-1411	bearing bracket	軸座		1	PCS
9	PP-13119	du bushing	自潤軸承	2215	2	PCS
11	PBA-6-10	bolt	有頭內六角螺絲	M6x10L	4	PCS
13	AHB-2019D	wheel	鏈輪		1	PCS
15	PBA-5-12	bolt	有頭內六角螺絲	M5x12L	2	PCS
17	PP-31640-1	hydraulic motor	油壓馬達	MMS-32C	1	PCS
19	PBA-6-10	bolt	有頭內六角螺絲	M6x10L	3	PCS
21	PQA-6	spring washer	彈簧華司	M6	3	PCS
23	PPA-6	washer	平面華司	M6	3	PCS
25	AHN-1414	tie shaft	連接軸		1	PCS
27	PAA-6-10	set screw	止付螺絲	M6x10L	1	PCS
29	PP-15031	universal joint	萬向接頭3節-16		1	PCS
31	AHN-1403	shaft	傳動心軸		1	PCS
33	PP-13070	du bushing	乾式軸承	1625	2	PCS
35	AHN-1406	bearing bracket	軸座		1	PCS
37	PBA-6-16	bolt	有頭內六角螺絲	M6x16L	2	PCS
39	PQA-6	spring washer	彈簧華司	M6	2	PCS
41	PPA-6	washer	平面華司	M6	2	PCS
43	AHB-2019B	wheel	傳動鏈輪(小)		1	PCS
45	PBA-5-8	bolt	有頭內六角螺絲	M5x8L	2	PCS
47	PP-19061	chain	鏈條	RS35	1	PCS
49	PP-19062	chain joint	鏈條接頭	RS35	1	PCS
63	AHN-1417-CE	cover	除屑螺桿護蓋		1	PCS
65	PBA-6-10	bolt	有頭內六角螺絲	M6x10L	2	PCS
67	PQA-6	spring washer	彈簧華司	M6	2	PCS
68	PPA-6	washer	平面華司	M6	2	PCS
69	AHN-1407A	cover	鏈齒蓋板		1	PCS
71	PBA-5-10	bolt	有頭內六角螺絲	M5x10L	4	PCS
73	PQA-5	spring washer	彈簧華司	M5	4	PCS
74	PPA-5	washer	平面華司	M5	4	PCS

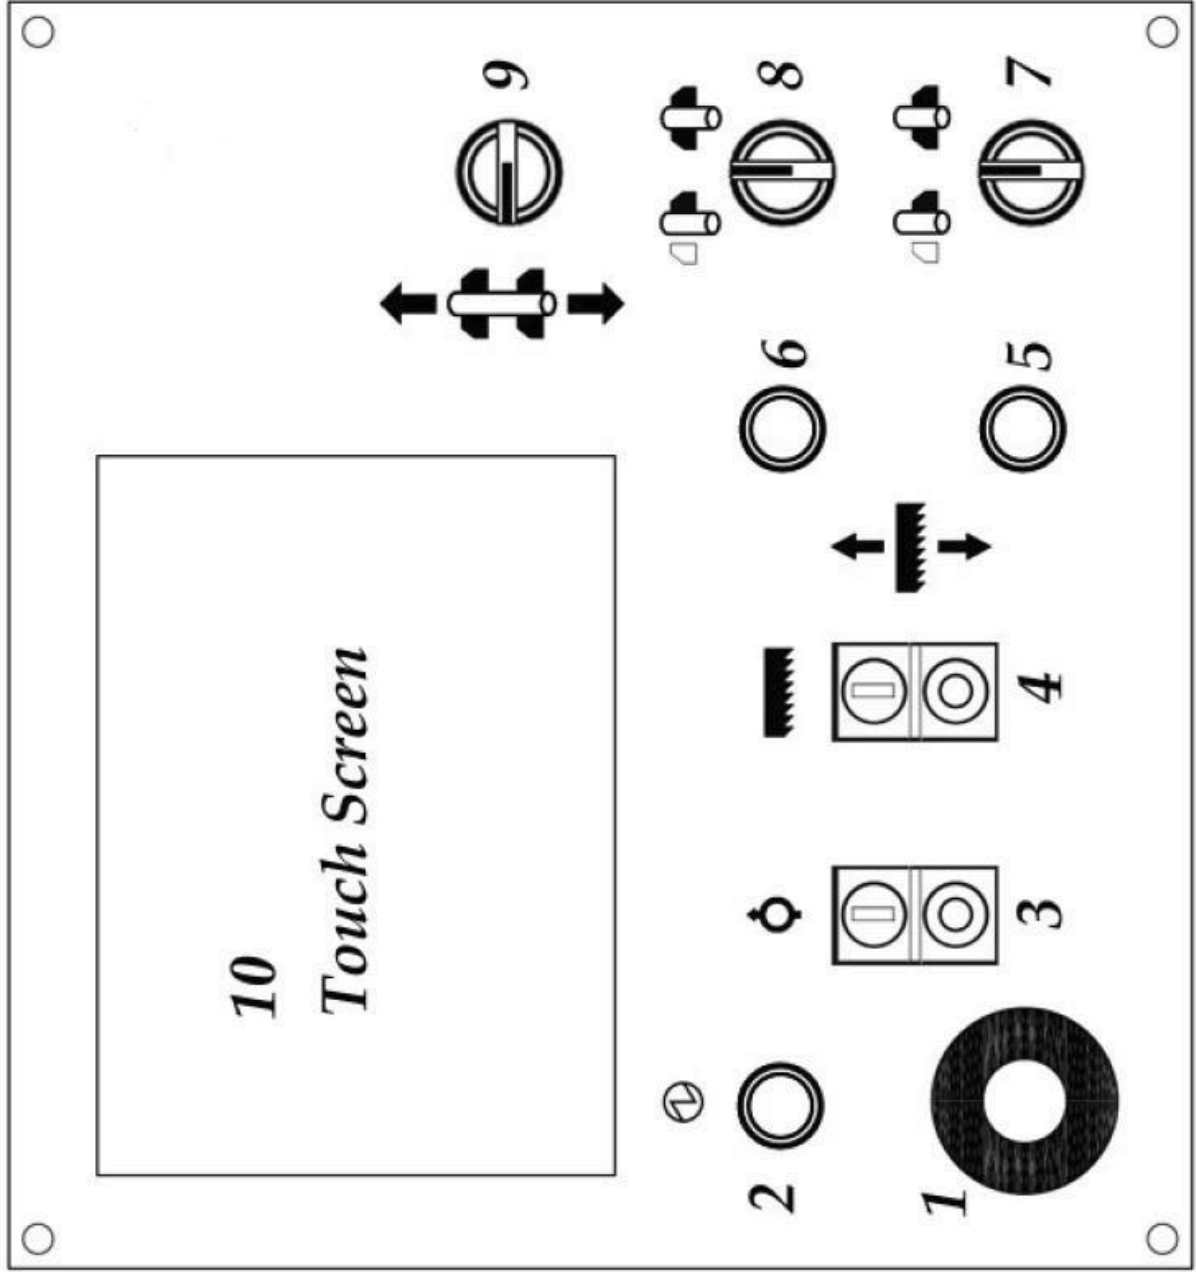



C2 SERIES PART LIST

CONTROL PANEL BUTTONS

No.	PART NUMBER	PART Name IN ENG.	PART Name IN CHI.	Q'TY
1	EP-90763A*T & EP-90760*T	Emergency stop button	緊急停止按鈕	1
2	EP-90755-1*T	Power indicator lamp	電源指示燈	1
3	EP-90674E-CE*T & EP-90674F-CE*T	Hydraulic start/stop buttons with built-in lamp (CE model)	油壓開啟/停止按鈕_含內建燈 (CE 機種)	1
4	EP-90674E-CE*T & EP-90674F-CE*T	Saw blade start/stop buttons with built-in lamp (CE model)	鋸刀開始/停止按鈕_含內建燈 (CE 機種)	1
5	EP-90758*T & EP-90759*T	Saw bow down button	鋸弓上升按鈕	1
6	EP-90758*T & EP-90759*T	Saw bow up button	鋸弓下降按鈕	1
7	EP-90757B*T & EP-90760A*T	Front vise clamp /open button	前虎鉗夾持/釋放鈕	1
8	EP-90757B*T & EP-90760A*T	Rear vise clamp /open button	後虎鉗夾持/釋放鈕	1
9	EP-90757B*T & EP-90760A*T	Feed forward/backward button	鋸材往前/退後旋鈕	1
10	EP-90981E-1*T	HMI touch screen 7"	HMI 觸控螢幕 7"	1

APPENDIX

DECLARATION OF CONFORMITY

ELECTRICAL SYSTEM

HYDRAULIC SYSTEM



Original Instruction

DECLARATION OF CONFORMITY

(DIRECTIVE 2006/42/CE, ENCLOSURE II, PART A)

The Manufacturer:

COSEN MECHATRONICS CO., LTD.
110 CHING-FU ST.
HSINCHU 300
TAIWAN

Person authorized to compile the technical file in Europe:

Cosen Europe B.V.
Willem Barentszweg 20
5928 LM, Venlo
The Netherlands
Tel: +31 77 760 0280

Hereby declare at its own responsibility that the product

NAME: METAL-CUTTING BANDSAW MACHINE
MODEL: C2


Complies with the provisions of the machinery directive, Directive 2006/42/CE with the following amendment and integrations; complies with EMC Directive 2004/108/CE with the following amendment and integrations;



And also complies with the following provisions:

- EN ISO 12100:2010
- EN ISO 4413:2010
- EN ISO 13849-1:2008
- EN ISO 13857: 2008
- EN 60204-1: 2006+A1: 2009
- EN 13898:2003+A1:2009









The technical documentation of the equipment listed above is available.




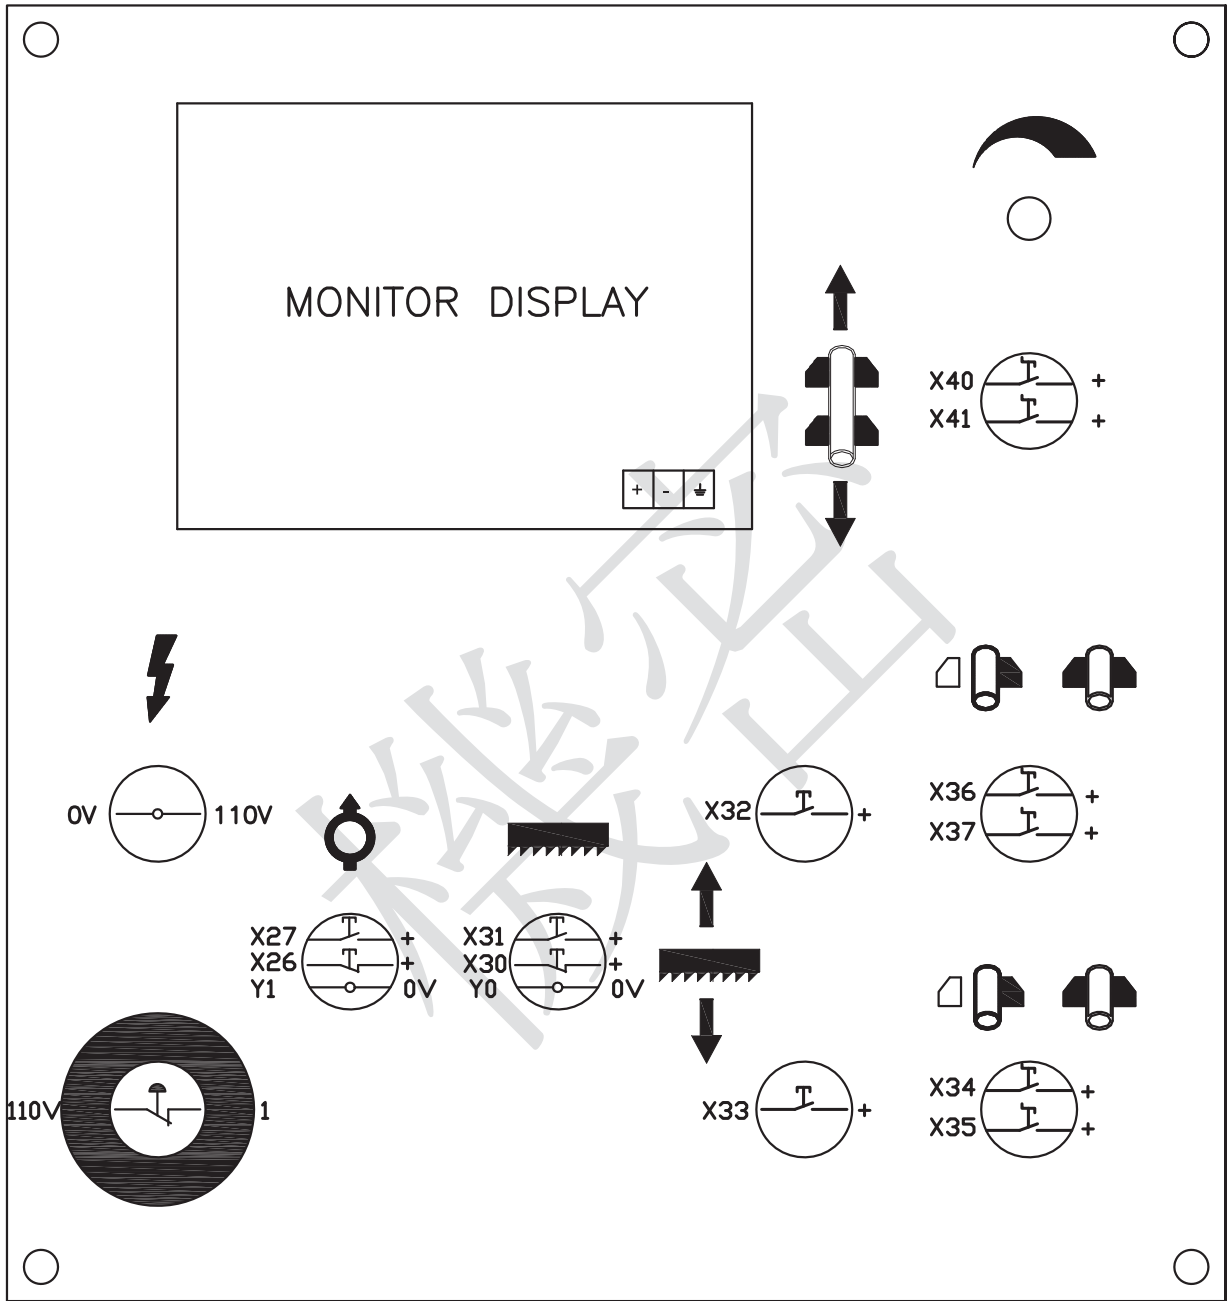

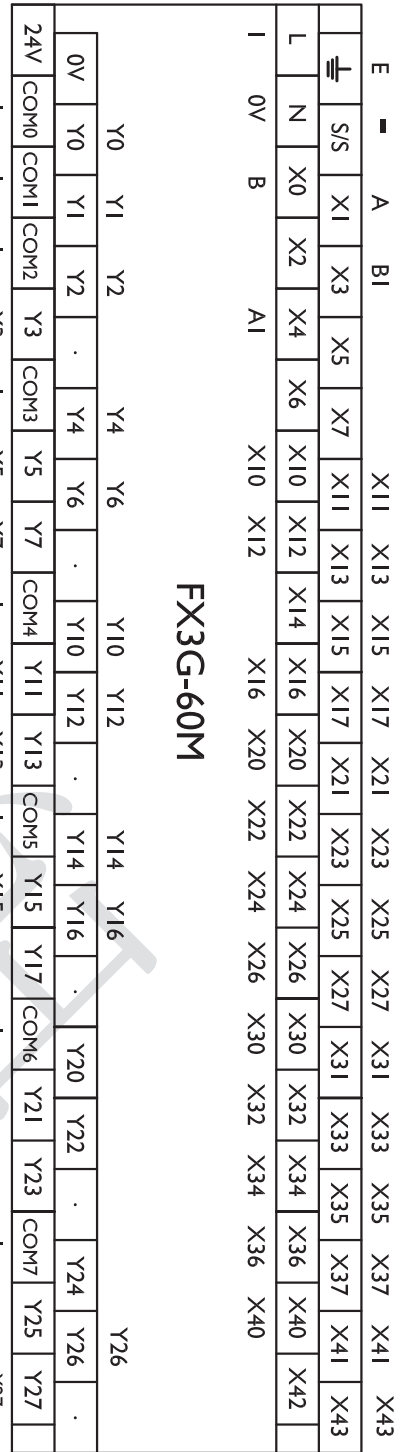


FX3G-60M

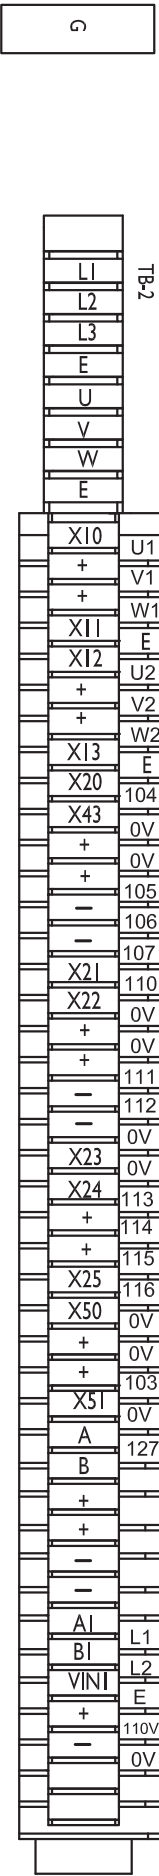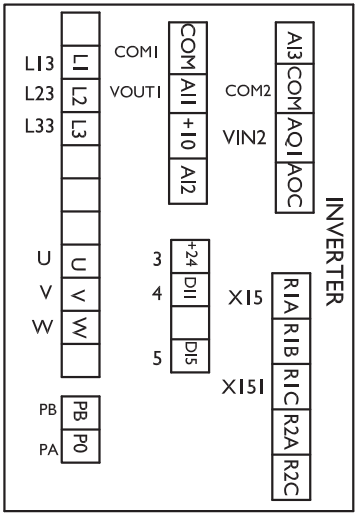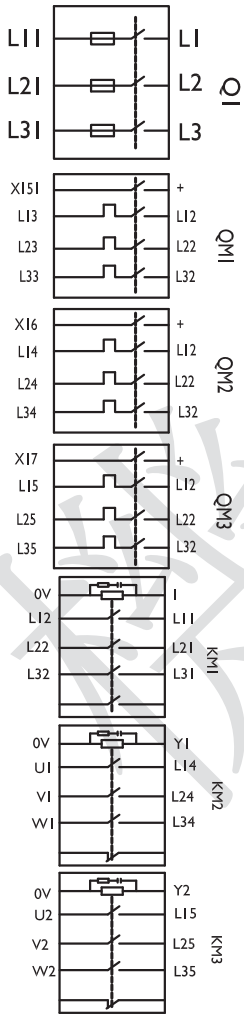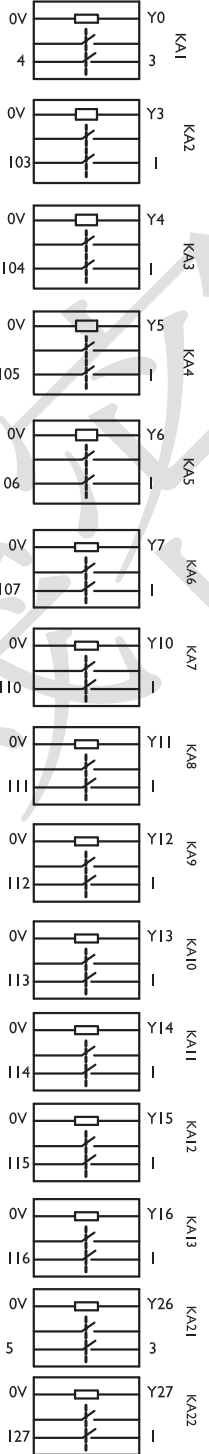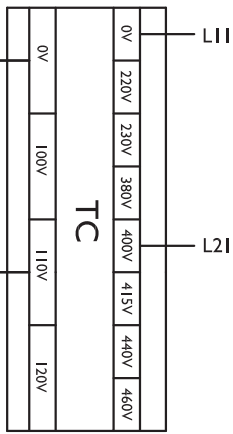
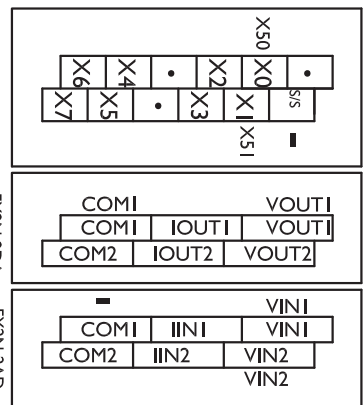


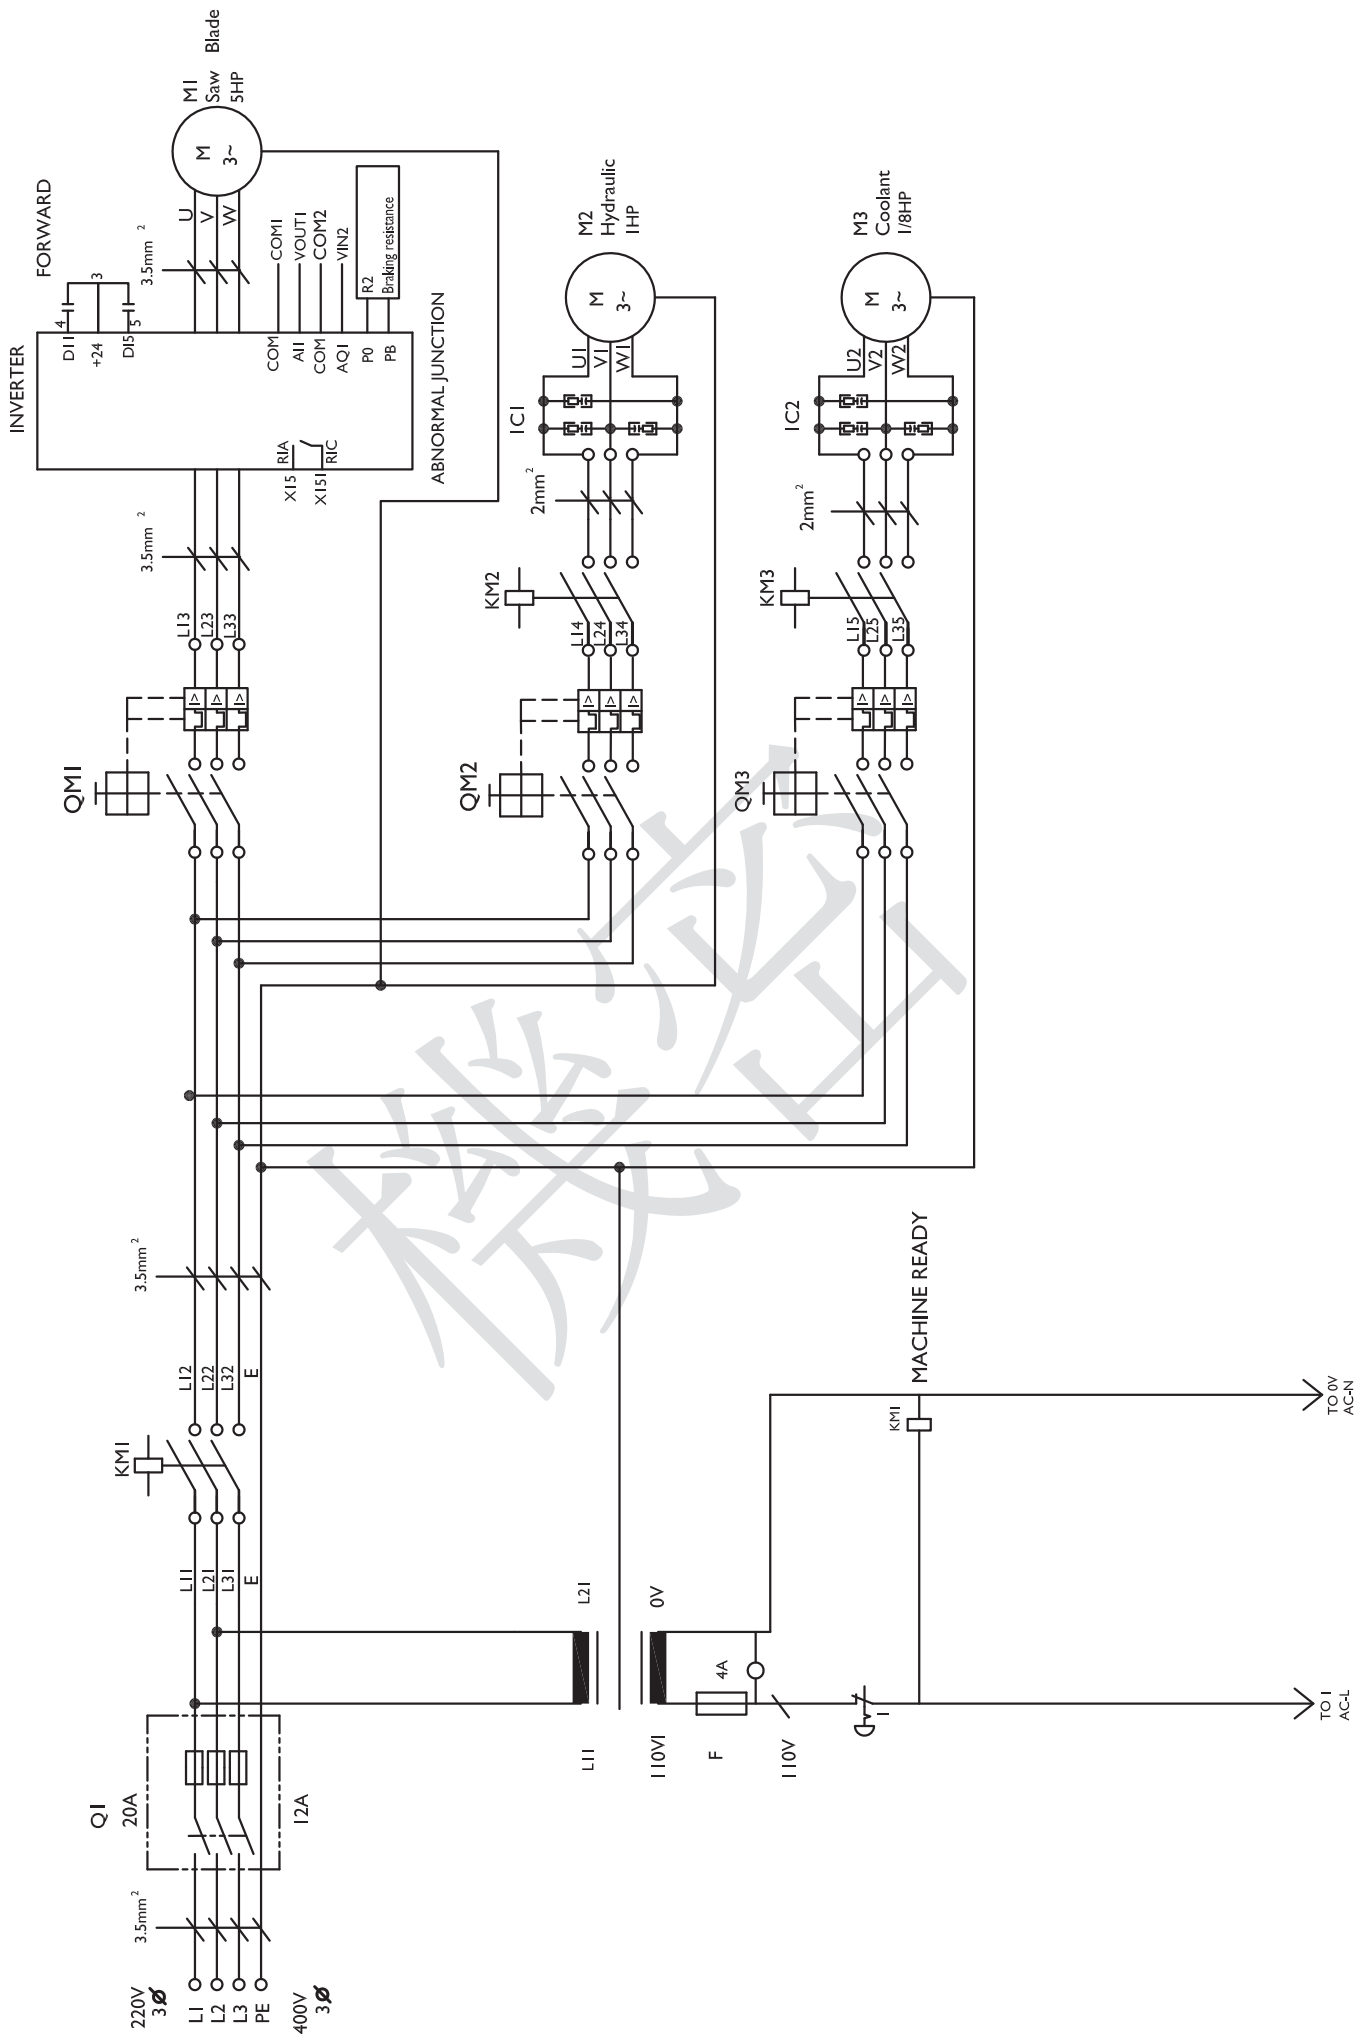


HEIGHT ENCODER

FEEDING ENCODER

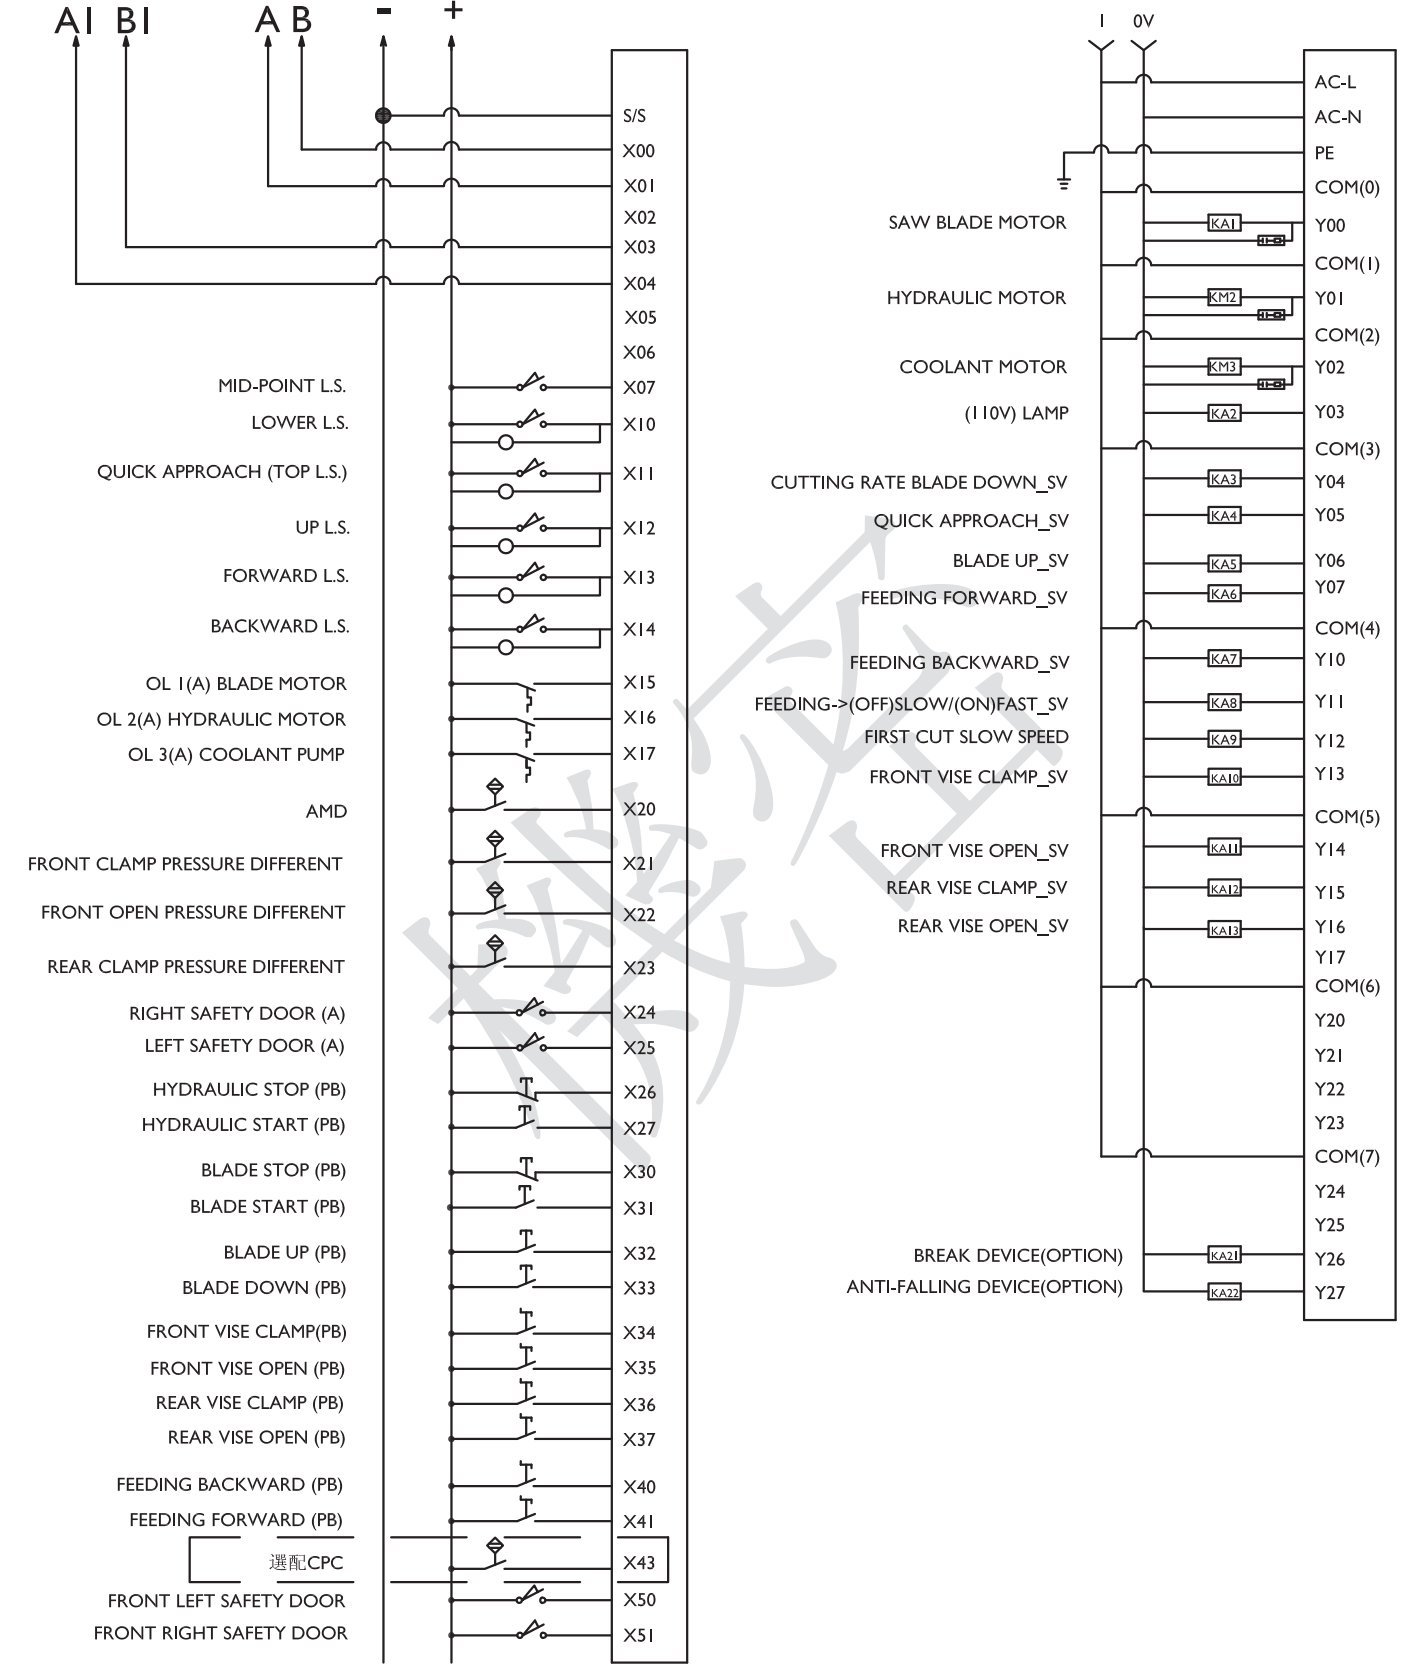

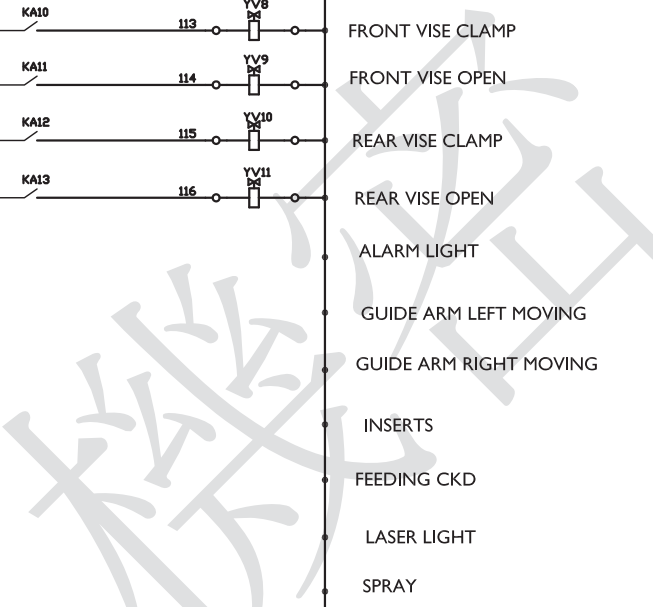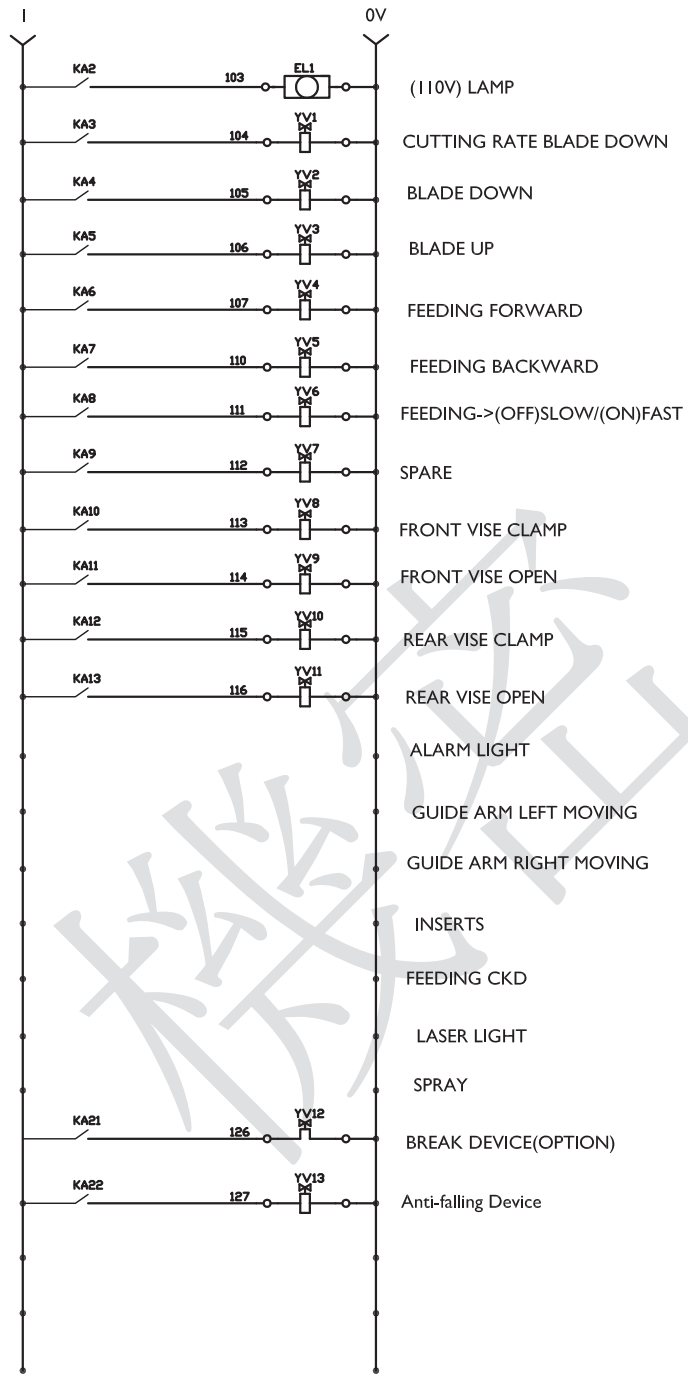

C2 HYDRAULIC CIRCUIT

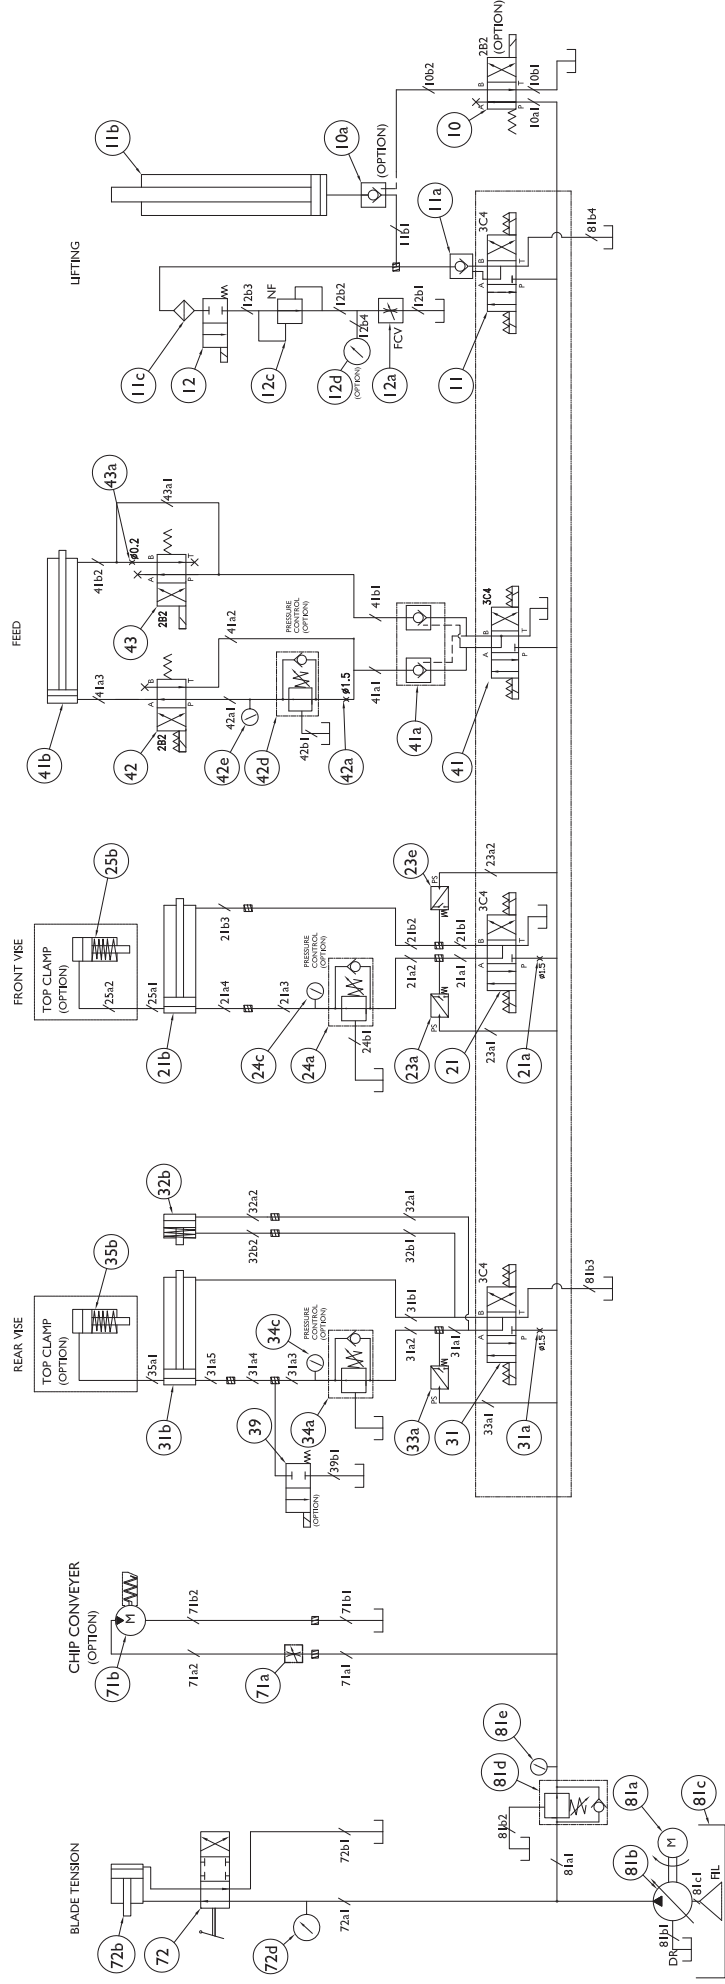

COSEN SAWS

COSEN EUROPE B.V.

Vertical Plate Saws
Horizontal Billet Saws
NC/CNC Band Saws
Structural Miter-Cutting Saws
Automatic Band Saws

Visit our website at
www.cosen.com

COSEN MECHATRONICS CO., LTD.